




**COMMERCIAL  
PRODUCT SPECIFICATIONS**

Bulletin No. 310959  
January 2022

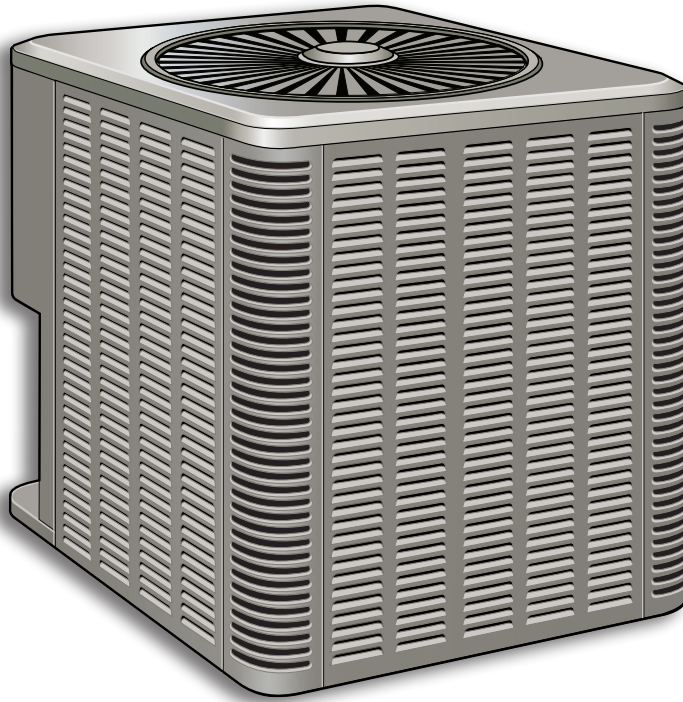


**SEER up to 16.00**


**3 to 5 Tons**

**Cooling Capacity - 31,000 to 58,000 Btuh**

**MODEL NUMBER IDENTIFICATION**

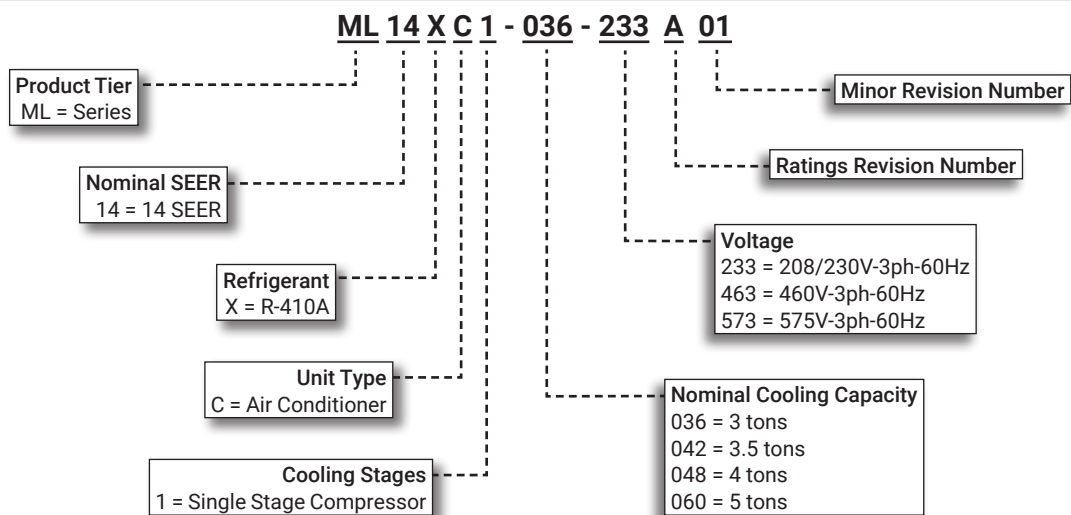

## FEATURE HIGHLIGHTS

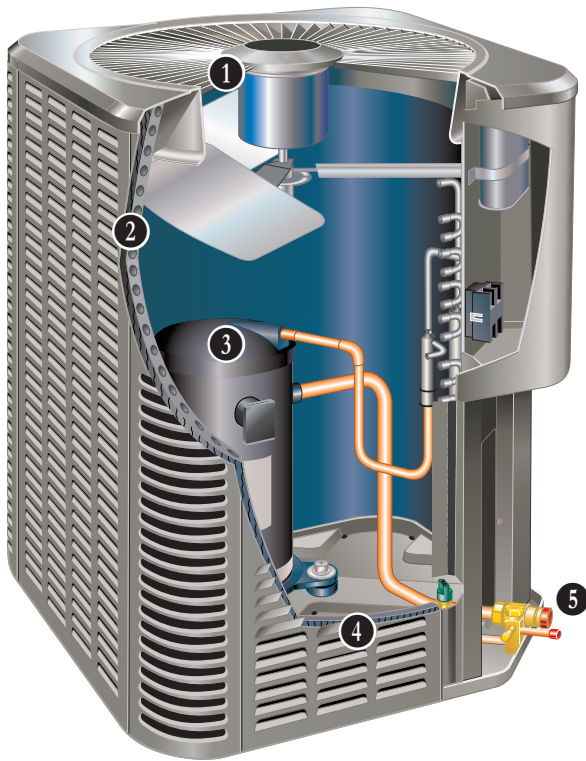

1. Outdoor Coil Fan
2. Omniguard™ Coil
3. Scroll Compressor
4. Heavy Gauge Steel Cabinet
5. Refrigerant Line Connections and Access

## CONTENTS

Approvals And Warranty . . . . .	3
Dimensions . . . . .	8
Electrical Data . . . . .	6
Features . . . . .	3
Installation Clearances . . . . .	7
Model Number Identification . . . . .	1
Optional Accessories - Order Separately . . . . .	6
Sound Data . . . . .	7
Specifications . . . . .	6

## APPROVALS AND WARRANTY

### **APPROVALS**

- AHRI Standard 210/240 certified
- AHRI Certified system match-ups, visit [www.ahridirectory.org](http://www.ahridirectory.org)
- Sound rated to AHRI Standard 270-2008 test conditions
- Tested in an environmental test room
- Rated According to U.S. Department of Energy (DOE) test procedures
- Unit and components ETL, NEC and CEC bonded for grounding to meet safety standards for servicing
- ETL certified (U.S. and Canada)
- ISO 9001 Registered Manufacturing Quality System

### **WARRANTY**

- Compressor - Limited five years
- All other covered components - Limited one year

**NOTE** - Refer to Equipment Limited Warranty certificate included with unit for specific details.

## FEATURES

### **APPLICATIONS**

- 3 through 5 tons
- 208/230V, 460V, or 575V-3ph models
- Sound levels low as 76 dBA
- Vertical air discharge
- Applicable to indoor air handlers or gas furnaces with indoor add-on coils
- Shipped completely factory assembled, piped and wired

**NOTE** - When heat pumps are used with gas furnaces, a dual-fuel compatible thermostat or zone control system with dual-fuel capabilities must be used (order separately).

**NOTE** - Installer must set outdoor unit, connect refrigerant lines and make electrical connections to complete job.

### **REFRIGERATION SYSTEM**

#### **R-410A Refrigerant**

- Non-chlorine, ozone friendly
- Unit is factory pre-charged

#### **① Outdoor Coil Fan**

- Direct drive fan
- Vertical air discharge
- Louvered steel top fan guard
- Totally enclosed fan motor
- Ball bearings
- Inherently protected

#### **② Omniguard™ Coil**

- Enhanced aluminum alloy tube/enhanced fin coil
- Superior corrosion resistance
- Ripple-edged aluminum fins
- Aluminum tube construction
- Lanced fins for maximum fin surface exposure
- Fin collars grip tubing for maximum contact area
- Flared shoulder tubing connections
- Factory tested under high pressure
- Entire coil is accessible for cleaning

#### **High Pressure Switch**

- Furnished with unit for field installation
- Protects the system from high pressure conditions
- Automatic reset

#### **Low Pressure Switch**

- Shuts off unit if suction pressure falls below setting
- Loss of charge and freeze-up protection
- Automatic reset

## FEATURES

### REFRIGERATION SYSTEM (continued)

#### High Capacity Liquid Line Drier

- Factory installed in the liquid line
- Drier traps moisture or dirt
- 100% molecular-sieve, bead type, bi-flow drier

#### Optional Accessories

##### Expansion Valve Kits

- Field installed on certain indoor units
- See TXV Usage table
- Chatleff-style fitting

##### Loss of Charge Switch Kit

- Protects compressor from damage from low refrigerant charge conditions
- SPST, normally-closed
- Automatic reset

##### Refrigerant Line Kits


- Refrigerant lines are shipped refrigeration clean
- Lines are cleaned, dried, pressurized and sealed at factory
- Suction line fully insulated
- Lines are stubbed at both ends

**NOTE** - Not available for 060 models. Must be field fabricated.

### COMPRESSOR

#### 3 Scroll Compressor

- High efficiency with uniform suction flow
- Constant discharge flow, high volumetric efficiency and quiet operation
- Low gas pulses during compression reduces operational sound levels
- Compressor motor is internally protected from excessive current and temperature
- Muffler in discharge line reduces operating sound levels
- Compressor is installed in the unit on resilient rubber mounts for vibration free operation

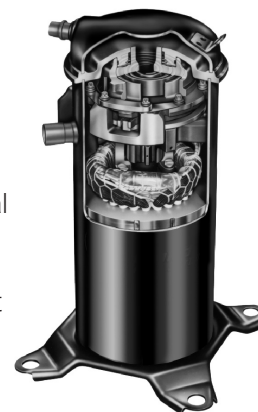

#### Scroll Compressor Operation

- Two involute spiral scrolls matched together generate a series of crescent-shaped gas pockets between them
- During compression, one scroll remains stationary while the other scroll orbits around it
- Gas is drawn into the outer pocket, the pocket is sealed as the scroll rotates
- As the spiral movement continues, gas pockets are pushed to the center of the scrolls. Volume between the pockets is simultaneously reduced
- When the pocket reaches the center, gas is now at high pressure and is forced out of a port located in the center of the fixed scrolls
- During compression, several pockets are compressed simultaneously resulting in a smooth continuous compression cycle
- Continuous flank contact, maintained by centrifugal force, minimizes gas leakage and maximizes efficiency
- Compressor is tolerant to the effects of slugging and contaminants. If this occurs, scrolls separate, allowing liquid or contaminants to be worked toward the center and discharged

#### Compressor Crankcase Heater

- Protects against refrigerant migration that can occur during low ambient operation

#### Optional Accessories

##### Compressor Sound Cover

- Reinforced vinyl compressor cover
- 1-1/2 inch thick batt of fiberglass insulation
- Hook and loop fastening tape on all open edges

##### Compressor Low Ambient Cut-Off

- Non-adjustable switch (low ambient cut-out)
- Prevents compressor operation in cooling mode when outdoor temperature is below 35°F

## FEATURES

### CONTROLS

#### Optional Accessories

##### Compressor Low Ambient Cut-Off Switch

- Non-adjustable switch (low ambient cut-out)
- Prevents compressor operation when outdoor temperature is below 35°F

##### Compressor Time-Off Control

- Kit prevents compressor short-cycling
- Allows time for suction and discharge pressure to equalize
- Permits compressor start-up in an unloaded condition
- Automatic reset
- Five minute delay between compressor shut-off and start-up

##### Indoor Blower Off Delay Relay Kit

- Delays indoor blower-off time during the cooling cycle

##### Low Ambient Kit

- Air conditioners can operate down to 45°F outdoor air temperature without additional controls
- Two low ambient control options are available for field installation:
  1. Low Ambient Control Kit (30°F)
  2. Low Ambient Control (0°F)  
Requires Speed Control and Weatherproof Kit (ordered separately). Available for 208/230V models only.

**NOTE** - Freezestat should be installed on compressors equipped with a low ambient kit.

##### Freezestat

- Installs on or near the suction line of the indoor coil or on the suction line
- Senses suction line temperature and cycles the compressor off when suction line temperature falls below its setpoint
- Opens at 29°F and closes at 58°F

##### Thermostats

- For thermostat options, see Optional Conventional Temperature Control Systems on Page 10

### CABINET

- 4 • Heavy gauge steel cabinet
- Five station metal wash process
- Louvered heavy gauge steel panels
- Powder paint finish for superior rust and corrosion protection
- Control box conveniently located with all controls factory wired
- Corner patch plate allows compressor access
- Drainage holes provided in base section

#### Unit Base

- Durable zinc-coated base section resists rust and corrosion

- 5 **Refrigerant Line Connections, Electrical Inlets, Service Valves**

- Sweat connection vapor and liquid lines
- Located on corner of unit cabinet
- Fully serviceable brass service valves
- Suction valve can be fully shut off, while liquid valve may be front seated to manage refrigerant charge while servicing system
- Refrigerant line connections and field wiring inlets are located in one central area of cabinet for easy access
- See dimension drawing

#### Optional Accessories

##### Unit Stand-Off Kit

- Black high density polyethylene feet
- Raises unit off mounting surface
- Four feet furnished per order number

## SPECIFICATIONS

General Data	Model No. - 208/230V-3ph	ML14XC1-036-233	ML14XC1-042-233	ML14XC1-048-233	ML14XC1-060-233
	Model No. - 460V-3ph	ML14XC1-036-463	ML14XC1-042-463	ML14XC1-048-463	ML14XC1-060-463
	Model No. - 575V-3ph	ML14XC1-036-573	- - -	ML14XC1-048-573	ML14XC1-060-573
Nominal Tonnage		3	3.5	4	5
<b>Indoor Unit Expansion Valve (TXV)</b>		<b>12J19</b>	<b>12J20</b>	<b>12J20</b>	<b>12J20</b>
<sup>1</sup> Sound Rating Number		76	76	78	80
<b>Connections (sweat)</b>	Liquid line o.d. - in.	3/8	3/8	3/8	3/8
	Suction line o.d. - in.	7/8	7/8	7/8	1-1/8
<sup>2</sup> Refrigerant	R-410A charge furnished	7 lbs. 14 oz.	8 lbs. 12 oz.	9 lbs. 8 oz.	12 lbs. 0 oz.
<b>Outdoor Coil</b>	Net face area - Outer coil	18.67	21.00	21.00	29.09
	sq. ft. Inner coil	17.96	20.25	20.25	28.16
	Tube diameter - in.	5/16	5/16	5/16	5/16
	No. of rows	2	2	2	2
	Fins per inch	22	22	22	22
<b>Outdoor Fan</b>	Diameter - in.	22	22	22	26
	No. of Blades	3	3	4	4
	Motor hp	1/6	1/6	1/4	1/4
	Cfm	3160	3050	3600	4550
	Rpm	825	825	825	825
	Watts	190	190	310	310
	Shipping Data - lbs. 1 package		190	211	218

## ELECTRICAL DATA

Line voltage data - 60 Hz - 3ph	208/230V	460V	575V	208/230V	460V	208/230V	460V	575V	208/230V	460V	575V
<sup>3</sup> Maximum overcurrent protection (MOCP) amps	15	10	10	20	10	20	10	10	30	15	10
<sup>4</sup> Minimum circuit ampacity (MCA)	12.2	7.8	5.3	17.9	8.1	18.9	8.5	7.1	21.4	10.7	8.1
<b>Compressor</b>	Rated Load Amps	9.0	5.8	3.8	13.5	6.0	13.8	6.1	4.9	16.0	7.8
	Locked Rotor Amps	71	38	37	118	60	123.0	60	33	110	60
	Power Factor	0.8	0.8	0.8	0.90	0.90	0.86	0.86	0.86	0.88	0.88
<b>Outdoor Fan Motor</b>	Full Load Amps	1.0	0.6	0.6	1.0	0.6	1.7	0.9	0.9	1.4	1
	Locked Rotor Amps	1.9	1.1	1.1	1.9	2.3	3.2	2.3	2.3	3.2	2.5

## OPTIONAL ACCESSORIES - ORDER SEPARATELY

<b>Compressor Low Ambient Cut-Off</b>	<b>45F08</b>										
<b>Compressor Sound Cover</b>	<b>18J42</b>										
<b>Compressor Time off Control</b>	<b>47J27</b>										
<b>Indoor Blower Off Delay Relay</b>	<b>58M81</b>										
<b>Freezestat</b>	3/8 in. tubing	<b>93G35</b>									
	5/8 in. tubing	<b>50A93</b>									
<b>Loss of Charge Switch Kit</b>	<b>84M23</b>										
<sup>5</sup> <b>Low Ambient Kit (Fan Cycling) (30°F)</b>	<b>34M72</b>										
<sup>5</sup> <b>Low Ambient Control (0°F)</b>	<b>X5867</b>										
<b>208/230V only Weatherproof Kit</b>	<b>56N41</b>										
<b>Refrigerant Line Sets</b>	L15-65-30, L15-65-40, L15-65-50										
	Field Fabricate										
<b>Unit Stand-Off Kit</b>	<b>94J45</b>										

NOTE - Extremes of operating range are plus 10% and minus 5% of line voltage.

<sup>1</sup> Sound Rating Number rated in accordance with test conditions included in AHRI Standard 270.

<sup>2</sup> Refrigerant charge sufficient for 15 ft. length of refrigerant lines. For longer line set requirements see the Installation Instructions for information about line set length and additional refrigerant charge required.

<sup>3</sup> HACR type circuit breaker or fuse.

<sup>4</sup> Refer to National or Canadian Electrical Code manual to determine wire, fuse and disconnect size requirements.

<sup>5</sup> Freezestat is recommended with Low Ambient Control.

## SOUND DATA


<sup>1</sup> Unit Model	Octave Band Sound Power Levels dBA, re 10 <sup>-12</sup> Watts Center Frequency - Hz							<sup>1</sup> Sound Rating Number (dBA)	<sup>2</sup> Estimated Sound Pressure Level at Distance From Unit (dBA at distance in ft.)				
	125	250	500	1000	2000	4000	8000		3	5	10	15	50
036	58	68	71.5	70.5	66.5	61.5	55	76	69	64	58	55	44
042	56	65	71	72	68	62	55	76	69	64	58	55	44
048	62	68	73.5	73	69	64	57	78	71	66	60	57	46
060	63.5	70	75	75	70.5	68	61	80	73	68	62	59	48

NOTE - The octave sound power data does not include tonal correction.

<sup>1</sup> Tested according to AHRI Standard 270-2008 test conditions.

<sup>2</sup> Estimated sound pressure level at distance based on AHRI Standard 275-2010 method for equipment located on the ground, roof, or on side of building wall with no adjacent reflective surface within 9.8 feet. Sound pressure levels will increase based on changes to assumptions. For other applications, refer to AHRI Standard 275.

## INSTALLATION CLEARANCES

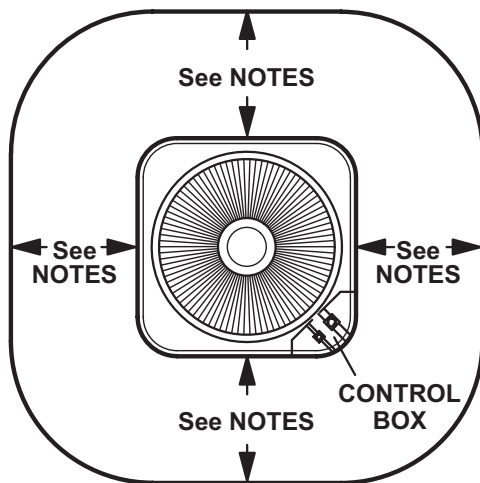

### NOTES:





Service clearance of 30 in. (762 mm) must be maintained on one of the sides adjacent to the control box.

Clearance to one of the other three sides must be 36 in. (914 mm)

Clearance to one of the remaining two sides may be 12 in. (305 mm) and the final side may be 6 in. (152 mm).

A clearance of 24 in. must be maintained between two units. 48 in. (1219 mm) clearance required on top of unit.

# DIMENSIONS

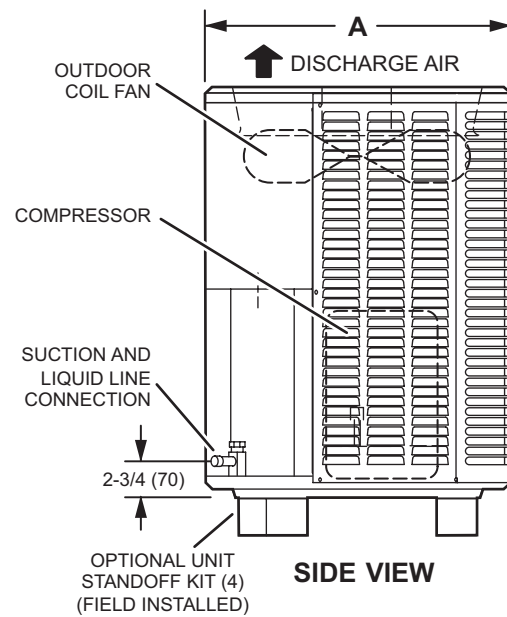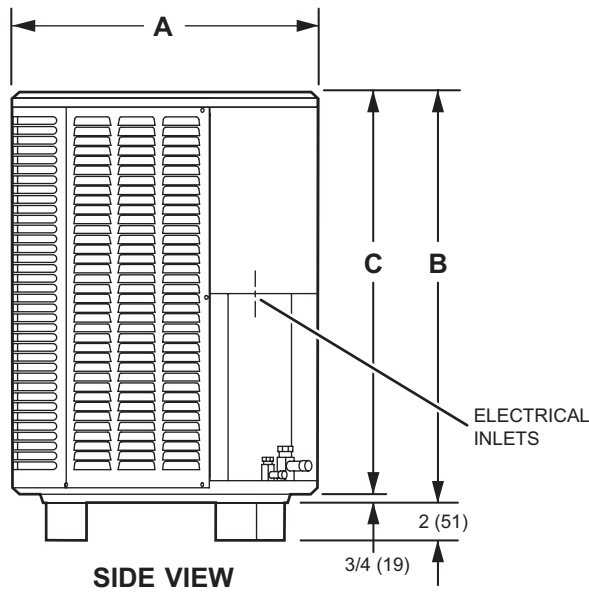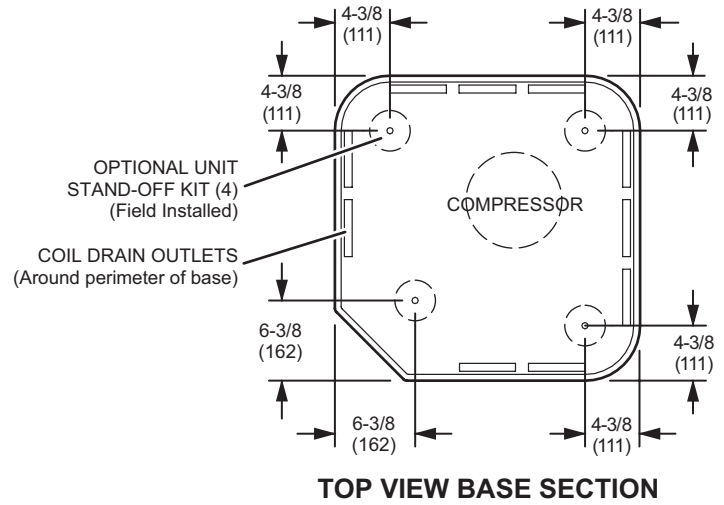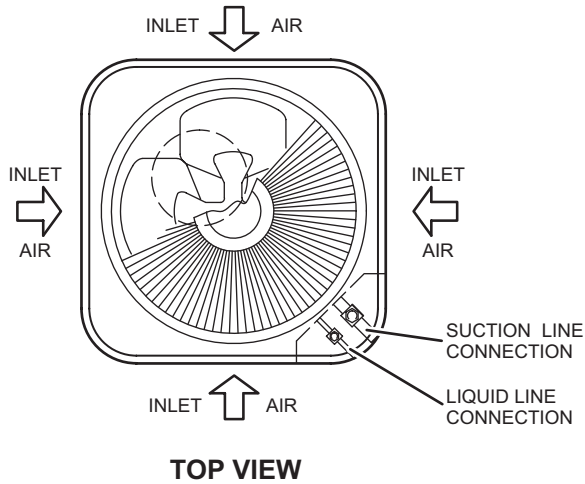

Model No.	A		B		C	
	inches	mm	inches	mm	inches	mm
ML14XC1-036	28-1/4	718	33-1/4	845	32-1/2	826
ML14XC1-042	28-1/4	718	37-1/4	946	36-1/2	927
ML14XC1-048	28-1/4	718	37-1/4	946	36-1/2	927
ML14XC1-060	32-1/4	819	43-1/4	1099	42-1/2	1080











Visit us at [www.allied-commercial.com](http://www.allied-commercial.com)

For the latest technical information, visit us at [www.allied-commercial.com](http://www.allied-commercial.com)

Contact us at 1-800-448-5872

NOTE - Due to Allied Commercial ongoing commitment to quality, Specifications, Ratings and Dimensions subject to change without notice and without incurring liability. Improper installation, adjustment, alteration, service or maintenance can cause property damage or personal injury. Installation and service must be performed by a qualified installer and servicing agency.

©2022 Allied Air Enterprises LLC, a Lennox International Inc. Company