

*MULTI-POSITION, MULTI-SPEED,  
 ECM-BASED AIR HANDLER  
 WITH INTERNAL TXV  
 1½ TO 5 TONS*



**Contents**

Air Handler Nomenclature..... 2  
 Heater Kit Nomenclature..... 2  
 Product Specifications..... 3  
 Dimensions ..... 4  
 Airflow Data ..... 5  
 Heat Kit Data..... 7  
 Wiring Diagram..... 9  
 Accessories ..... 12

**Product Features**

- Internal factory-installed thermal expansion valves for cooling and heat pump applications
- Direct drive, multi-speed ECM blower motor
- All-aluminum evaporator coil
- Coil mounting track for quick repositioning
- Optimized for use with R-410A refrigerant
- Cabinet air leakage less than 2.0% at 1.0 inch H<sub>2</sub>O when tested in accordance with ASHRAE standard 193
- Cabinet air leakage less than 1.4% at 0.5 inch H<sub>2</sub>O when tested in accordance with ASHRAE standard 193
- AHRI certified; ETL listed
- Rigid SmartFrame™ cabinet
- Horizontal or vertical configuration capabilities
- 21” depth for easier attic access
- DecaBDE-free thermoplastic drain pan with secondary drain connections
- Screw-less sides and back helps to reduce condensation when installed in humid locations
- Foil-faced insulation covers the internal casing to reduce cabinet condensation
- Galvanized, leather grain-embossed finish
- Glue-less cabinet insulation retention
- Tool-less filter access
- Field Installed 3 kW – 25 kW electric heater kits available



COMPANY WITH  
 QUALITY SYSTEM  
 CERTIFIED BY DNV GL  
 = ISO 9001 =

COMPANY WITH  
 ENVIRONMENTAL SYSTEM  
 CERTIFIED BY DNV GL  
 = ISO 14001 =

\* Complete warranty details available from your local dealer or at [www.amana-hac.com](http://www.amana-hac.com). To receive the 10-Year Parts Limited Warranty, online registration must be completed within 60 days of installation. Online registration is not required in California or Québec.

	A	M	S	T	36	B	U	1	4	05	A	
	1	2	3	4	5,6	7	8	9	10	11,12	13,14	
<b>Product</b>											<b>Engineering *</b>	
A Corporate Air Handler											Major/Minor Revisions	
D Daikin Air Handler											A - Initial Release B - 1st Revision	
<b>Unit Application</b>											<b>Electric Heat KW</b>	
C Ceiling Mount											5 = 5kw	
M Multi-Positional											8 = 8kw	
W Wall Mount											10 = 10kw	
F Fit Compatible Multi-Positional											<b>Refrigerant</b>	
H Horizontal Discharge Compatible Multi-Positional											3 - R32	
											4 - R410A	
											6 - R410A or R22	
<b>Motor</b>											<b>Electrical</b>	
S MS-ECM											1 208/240 V, 1 Phase, 60 Hz	
V VS-ECM Communicating												
<b>Expansion Device</b>											<b>Cabinet</b>	
E Electronic Expansion Valve											N - Uncased	
F Flowrator											P - Painted	
T Thermal Expansion Valve											U - Unpainted	
<b>Nominal Capacity Range</b>											<b>Cabinet Width</b>	
12 = 1 Ton	36 = 3.0 Tons									AC* Series	AM* Series	AW* Series
18 = 1.5 Tons	42 = 3.5 Tons									M = 43.25"	B = 17.5"	S = 20.2"
24 = 2.0 Tons	48 = 4.0 Tons									L = 49.25"	C = 21.0"	L = 24.0"
30 = 2.5 Tons	60 = 5.0 Tons										D = 24.5"	

\*DENOTES AHRI WILD CARDS


	HKS	X	03	X	A	AA
	1	2	3	4	5	6,7
<b>Unit Type</b>						<b>Revisions</b>
HKS Heat Kit for Air Handlers						Engineering Revisions
<b>Circuit Breaker</b>						<b>Phase</b>
X No circuit breaker						A Single Phase 208 V
C Circuit Breaker						E Three Phase 240 V
						B Single Phase 240 V
						F Three Phase 208/240 V
						C Single Phase 208/240 V
						G Three Phase 460 V
						D Three Phase 208 V
						H Special case 208 V *
<b>Heating Capacity @ 240 Volts</b>						<b>Cabinet Size (MAX)</b>
03 3.0 kW	15 14.4 kW					C C Cabinet
05 4.5 kW	19 19.2 kW wth 150F limit					D D Cabinet
06 6.0 kW	20 19.2 kW with 170F limit					X All Cabinet Sizes
08 8.0 kW	25 25.0 kW					
10 9.6 kW						

	AMST 24BU14*	AMST 30BU14*	AMST 36BU14*	AMST 36CU14*	AMST 42CU14*	AMST 48CU14*	AMST 48DU14*	AMST 60DU14*
<b>NOMINAL RATINGS</b>								
Cooling (Btu/h)	24,000	36,000	36,000	36,000	42,000	48,000	48,000	60,000
<b>BLOWER</b>								
Diameter	10"	10"	10"	10"	10"	10"	10"	11"
Width	6"	6"	6"	8"	8"	10"	10"	10"
<b>COIL CONNECTIONS</b>								
Liquid	3/8"	3/8"	3/8"	3/8"	3/8"	3/8"	3/8"	3/8"
Suction	3/4"	3/4"	3/4"	3/4"	3/4"	7/8"	7/8"	7/8"
Coil Drain Connect (FPT)	3/4"	3/4"	3/4"	3/4"	3/4"	3/4"	3/4"	3/4"
<b>ELECTRICAL DATA</b>								
Voltage	208/230	208/230	208/230	208/230	208/230	208/230	208/230	208/230
Minimum Circuit Ampacity	5.8/5.8	5.6/5.6	5.6/5.6	7.1/7.1	5.9/5.9	7.1/7.1	8.6/8.6	8.6/8.6
Max. Overcurrent Device (Amps)	15/15	15/15	15/15	15/15	15/15	15/15	15/15	15/15
Minimum VAC	197	197	197	197	197	197	197	197
Maximum VAC	253	253	253	253	253	253	253	253
<b>Blower Motor</b>								
Full Load Amps (FLA)	4.6	4.5	4.5	5.7	4.7	6.9	6.9	6.9
Horsepower (HP)	¾	¾	¾	¾	¾	¾	¾	¾
<b>SHIP WEIGHT (LBS.)</b>								
	112	129	129	153	153	153	155	167

\*Airflow rate @.3 static

**Note:** Assumes dry coil; SCFM correction for wet coil = 4% (208V / 240V)

**DIMENSIONS**

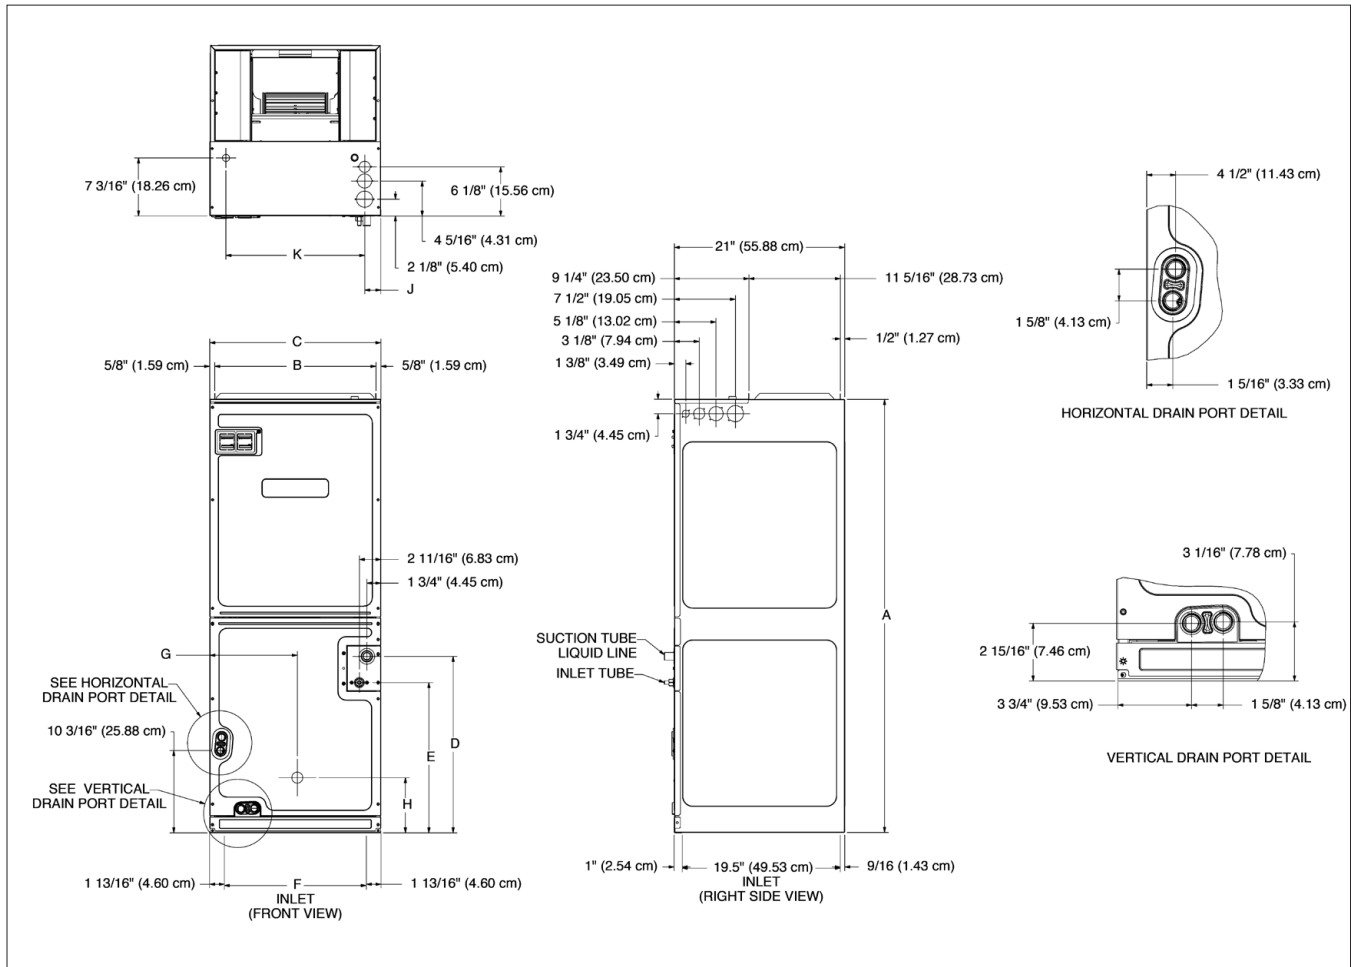

MODEL	A"	B"	C"	D"	E"	F"	G"	H"	J"	K"
AMST24BU*	45	16 5/16	17 9/16	15 1/4	12	12 1/2	9	12 9/16	2	13 5/8
AMST30BU*	53 7/16	16 5/16	17 9/16	23 11/16	20 1/16	12 1/2	9	12 3/4	2	13 5/8
AMST36BU*	53 7/16	16 5/16	17 9/16	23 11/16	20 1/16	12 1/2	9	12 3/4	2	13 5/8
AMST36CU*	49	19 13/16	21 1/8	21 12/16	17 3/4	16 1/16	9	12 3/4	2	17 1/8
AMST42CU*	53 7/16	19 13/16	21 1/8	21 12/16	18 1/2	16 1/16	9	12 3/4	2	17 1/8
AMST48CU*	58	19 13/16	21 1/8	26 3/16	22 15/16	14 10/16	10 13/16	6 13/16	2	17 1/8
AMST48DU*	53 7/16	23 1/14	24 5/8	21 1/16	18 1/4	17 11/16	12 9/16	6 15/16	2	20 5/8
AMST06DU*	58	23 1/14	24 5/8	26	22 3/4	17 11/16	12 9/16	13 3/16	2	20 5/8

MODEL NUMBER	SPEED TAP	STATIC PRESSURE (IN W.C)								
		0.1	0.2	0.3	0.4	0.5	0.6	0.7	0.8	0.9
AMST 24BU1400AA	T1	720	690	625	605	525	505	385	370	265
	T2	850	825	770	750	675	665	590	575	470
	T3	900	875	830	815	750	740	670	655	550
	T4	1,030	1,005	960	950	900	890	825	820	760
	T5	825	800	745	730	660	645	560	550	460
	T6	935	910	865	850	790	780	715	705	620
	T7	1,100	1,080	1,035	1,020	970	960	902	900	840
	T8	1,045	1,025	985	970	920	910	820	845	785
	T9	1,215	1,195	1,155	1,145	1,105	1,095	1,045	1,040	980
AMST 30BU1400AA	T1	750	725	670	655	585	570	465	455	360
	T2	920	895	845	830	780	770	710	700	615
	T3	985	960	915	900	850	840	785	775	710
	T4	1,185	1,165	1,125	1,115	1,070	1,060	1,015	1,010	960
	T5	1,070	1,050	1,005	995	945	935	890	885	830
	T6	620	585	515	458	375	310	260	245	145
	T7	840	815	760	745	685	670	590	580	480
	T8	855	830	780	765	705	695	625	615	515
	T9	995	970	925	910	860	850	800	790	730
AMST 36BU1400AA	T1	750	725	670	655	585	570	465	455	360
	T2	920	895	845	830	780	770	710	700	615
	T3	985	960	915	900	850	840	785	775	710
	T4	1,185	1,165	1,125	1,115	1,070	1,060	1,015	1,010	960
	T5	1,070	1,050	1,005	995	945	935	890	885	830
	T6	620	585	515	485	375	310	260	245	145
	T7	840	815	760	745	685	670	590	580	480
	T8	855	830	780	765	705	695	625	615	515
	T9	995	970	925	910	860	850	800	790	730
AMST 36CU1400AA	T 1	1,120	1,085	1,020	1,000	910	890	770	760	680
	T 2	1,285	1,255	1,190	1,170	1,100	1,085	990	980	885
	T 3	1,430	1,400	1,345	1,330	1,260	1,250	1,175	1,165	1,065
	T 4	1,735	1,410	1,660	1,645	1,580	1,570	1,510	1,500	1,440
	T 5	1,830	1,805	1,755	1,740	1,685	1,675	1,605	1,595	1,525
	T6	1,165	1,130	1,055	1,035	960	940	825	815	715
	T7	1,450	1,425	1,370	1,355	1,285	1,275	1,200	1,190	1,095
	T8	1,070	1,035	960	935	830	810	700	690	610
	T9	1,560	1,530	1,470	1,455	1,390	1,380	1,310	1,300	1,235
AMST 42CU1400AA	T1	1,165	1,140	1,085	1,065	990	975	895	880	765
	T2	1,210	1,185	1,130	1,110	1,040	1,025	950	935	830
	T3	12,515	1,190	1,135	1,120	1,055	1,040	960	945	835
	T4	1,495	1,470	1,425	1,415	1,365	1,355	1,305	1,295	1,220
	T5	1,435	1,410	1,360	1,345	1,295	1,285	1,220	1,210	1,140
	T6	1,410	1,385	1,335	1,325	1,280	1,270	1,195	1,185	1,115
	T7	1,440	1,415	1,362	1,355	1,305	1,295	1,235	1,225	1,155
	T8	1,230	1,205	1,150	1,135	1,070	1,060	990	975	850
	T9	1,495	1,470	1,425	1,415	1,365	1,355	1,305	1,295	1,220

See notes on page 6.

AIRFLOW DATA (CONT.)

MODEL NUMBER	SPEED TAP	STATIC PRESSURE (IN W.C)								
		0.1	0.2	0.3	0.4	0.5	0.6	0.7	0.8	0.9
<b>AMST 48CU1400AA</b>	T1	1,165	1,390	1,330	1,310	1,235	1,220	1,135	1,125	1,050
	T2	1,210	1,550	1,490	1,470	1,400	1,390	1,315	1,305	1,230
	T3	1,215	1,610	1,560	1,545	1,480	1,470	1,400	1,390	1,315
	T4	1,495	1,710	1,660	1,640	1,560	1,550	1,485	1,475	1,410
	T5	1,435	1,795	1,750	1,735	1,680	1,670	1,605	1,595	1,525
	T6	1,410	1,435	1,375	1,355	1,280	1,265	1,165	1,155	1,065
	T7	1,440	1,700	1,650	1,635	1,570	1,560	1,495	1,485	1,420
	T8	1,230	1,730	1,680	1,665	1,595	1,585	1,515	1,505	1,425
	T9	1,495	1,295	1,230	1,210	1,130	1,115	1,025	1,015	930
<b>AMST 48DU1400AA</b>	T1	1,425	1,395	1,335	1,320	1,250	1,240	1,165	1,155	1,070
	T2	1,510	1,480	1,425	1,410	1,345	1,335	1,270	1,260	1,185
	T3	1,605	1,580	1,525	1,510	1,450	1,440	1,375	1,365	1,300
	T4	1,875	1,855	1,810	1,795	1,735	1,725	1,670	1,665	1,605
	T5	1,755	1,730	1,680	1,665	1,605	1,595	1,535	1,525	1,465
	T6	1,350	1,320	1,260	1,245	1,175	1,160	1,085	1,075	980
	T7	1,140	1,105	1,040	1,020	935	915	805	790	685
	T8	1,605	1,580	1,525	1,510	1,450	1,440	1,375	1,365	1,300
	T9	1,605	1,580	1,525	1,510	1,450	1,440	1,375	1,365	1,300
<b>AMST 60DU1400AA</b>	T1	1,215	1,175	1,095	1,070	975	950	790	780	700
	T6	1,815	1,785	1,725	1,710	1,650	1,640	1,570	1,560	1,490
	T7	1,360	1,325	1,250	1,230	1,145	1,125	1,010	990	850
	T8	2,070	2,045	1,995	1,980	1,930	1,920	1,855	1,845	1,785
	T9	1,970	1,945	1,895	1,880	1,815	1,805	1,740	1,730	1,600

**NOTES**

1. Airflow data indicated is at 230V without air filter in place.
2. The chart is for information only. For satisfactory operation, external static pressure must not exceed value shown on rating plate. The shaded area indicates ranges in excess of maximum design external static pressure.
3. Use the CFM adjustment factors of 0.98 for horizontal left and 0.96 for horizontal right & downflow orientations
4. When applying a humidistat (normally closed), refer to the installation and operating instructions. The humidistat can adjust the cooling airflow to 85%.

Horizontal Left Factor	0.98
Horizontal Right Factor	0.95
Downflow Factor	0.96

HEATER KIT MODEL	CIRCUIT 1			CIRCUIT 2			SINGLE-POINT KIT	
	HEATER AMPS	MCA <sup>1</sup>	MOP <sup>2</sup>	HEATER AMPS	MCA <sup>1</sup>	MOP <sup>2</sup>	MCA <sup>1</sup>	MOP <sup>2</sup>
<b>AMST24BU1400AA</b>	0/0	5.8/5.8	15/15					
HKS*03XC*	10.8/12.5	19/21.4	20/25					
HKS*05XC*	17.3/20	27/30.8	30/35					
HKS*06XC*	21.7/25	32.8/37	35/40					
HKS*08XC*	28.9/33.3	41.9/47	45/50					
HKS*10XC*	34.7/40	49.1/56	50/60					
HKSC15XA 208	34.7	49.1	50	17.3	21.7	25	70.8	80
HKSC15XB 240	40	55.8	60	20	25	25	80.8	90
<b>AMST30BU1400AA</b>	0/0	5.6/5.6	15/15					
HKS*03XC*	10.8/12.5	19/21.3	20/25					
HKS*05XC*	17.3/20	27/30.6	30/35					
HKS*06XC*	21.7/25	32.7/37	35/40					
HKS*08XC*	28.9/33.3	42/47.3	45/50					
HKS*10XC*	34.7/40	49/55.6	50/60					
HKSC15XA 208	34.7	49	50	17.3	21.7	25	70.8	80
HKSC15XB 240	40	55.6	60	20	25	25	80.8	90
<b>AMST36BU1400AA</b>	0/0	5.6/5.6	15/15					
HKS*03XC*	10.8/12.5	19/21.3	20/25					
HKS*05XC*	17.3/20	27/30.6	30/35					
HKS*06XC*	21.7/25	32.7/37	35/40					
HKS*08XC*	28.9/33.3	42/47.3	45/50					
HKS*10XC*	34.7/40	49/55.6	50/60					
HKSC15XA 208	34.7	49	50	17.3	21.7	25	70.8	80
HKSC15XB 240	40	55.6	60	20	25	25	80.8	90
<b>AMST36CU1400AA</b>	0/0	7.1/7.1	15/15					
HKS*03XC*	10.8/12.5	20.7/23	25/25					
HKS*05XC*	17.3/20	29/32.1	30/35					
HKS*06XC*	21.7/25	34/38.4	35/40					
HKS*08XC*	28.9/33.3	43/48.8	45/50					
HKS*10XC*	34.7/40	50.5/57	60/60					
HKS*15XF*	0/0	7.1/7.1	15/15	30/34.6	30/34.6	40/45		
HKSC15XA 208	34.7	50.5	60	17.3	17.3	25	72.1	80
HKSC15XB 240	40	57.1	60	20	20	25	82.1	90
HKSC19CH 208	34.7	50.5	60	34.7	34.7	45	93.9	100
HKSC19CB 240	40	57.1	60	40	40	50	107	110
<b>AMST42CU1400AA</b>	0/0	5.9/5.9	15/15					
HKS*03XC*	10.8/12.5	19/21.5	20/25					
HKS*05XC*	17.3/20	28/30.9	30/35					
HKS*06XC*	21.7/25	33/37.1	35/40					
HKS*08XC*	28.9/33.3	42/47.5	45/50					
HKS*10XC*	34.7/40	49/55.9	50/60					
HKS*15XF*	0/0	5.9/5.9	15/15	30/34.6	38/43	40/45		
HKSC15XA 208	34.7	49.2	50	17.3	21.7	25	70.9	80
HKSC15XB 240	40	55.9	60	20	25	25	80.9	90
HKSC19CA 208	34.7	49.2	50	34.7	43.3	45	92.5	100
HKSC19CB 240	40	55.9	60	40	50	50	106	110

See notes on page 8.

HEAT KIT DATA (CONT.)

HEATER KIT MODEL	CIRCUIT 1			CIRCUIT 2			SINGLE-POINT KIT	
	HEATER AMPS	MCA <sup>1</sup>	MOP <sup>2</sup>	HEATER AMPS	MCA <sup>1</sup>	MOP <sup>2</sup>	MCA <sup>1</sup>	MOP <sup>2</sup>
<b>AMST48CU1400AA</b>	0/0	7.1/7.1	15/15					
HKS*03XC*	10.8/12.5	20.7/23	25/25					
HKS*05XC*	17.3/20	29/32.1	30/35					
HKS*06XC*	21.7/25	34/38.4	35/40					
HKS*08XC*	28.9/33.3	43/48.8	45/50					
HKS*10XC*	34.7/40	50.5/57	60/60					
HKS*15XF*	0/0	7.1/7.1	15/15	30/34.6	38/43	40/45		
HKSC15XA 208	34.7	50.5	60	17.3	21.7	25	72.1	80
HKSC15XB 240	40	57.1	60	20	25	25	82.1	90
HKSC19CH 208	34.7	50.5	60	34.7	43.3	45	93.9	100
HKSC19CB 240	40	57.1	60	40	50	50	107	110
<b>AMST48DU1400</b>	0/0	8.6/8.6	15/15					
HKS*03XC*	10.8/12.5	22/24.3	25/25					
HKS*05XC*	17.3/20	30.3/34	35/35					
HKS*06XC*	21.7/25	36/39.9	40/40					
HKS*08XC*	28.9/33.3	45/50.3	45/60					
HKS*10XC*	34.7/40	52/58.6	60/60					
HKS*15XF*	0/0	8.6/8.6	15/15	30/34.6	38/43	40/45		
HKSC15XA 208	34.7	52	60	17.3	21.7	25	73.6	80
HKSC15XB 240	40	58.6	60	20	25	25	83.6	90
HKS*20XF*	0/0	8.6/8.6	15/15	37.5/43.3	47/54	50/60		
HKSC20DA 208	34.7	52	60	34.7	43.3	45	95.3	100
HKSC20DB 240	40	58.6	60	40	50	50	109	110
<b>AMST60DU1400</b>	0/0	8.6/8.6	15/15					
HKS*03XC*	10.8/12.5	22/24.3	25/25					
HKS*05XC*	17.3/20	30.3/34	35/35					
HKS*06XC*	21.7/25	36/39.9	40/40					
HKS*08XC*	28.9/33.3	45/50.3	45/60					
HKS*10XC*	34.7/40	52/58.6	60/60					
HKS*15XF*	0/0	8.6/8.6	15/15	30/34.6	38/43	40/45		
HKSC15XA 208	34.7	52	60	17.3	21.7	25	73.6	80
HKSC15XB 240	40	58.6	60	20	25	25	83.6	90
HKS*20XF*	0/0	8.6/8.6	15/15	37.5/43.3	47/54	50/60		
HKSC20DH 208	34.7	52	60	34.7	43.3	45	95.3	100
HKSC20DB 240	40	58.6	60	40	50	50	109	110
HKTSD25DA 208	52	73.6	80	35	43.3	45	117	125
HKTSD25DB 240	60	83.6	90	40	50	50	134	150

<sup>1</sup>Minimum Circuit Ampacity (Heater Amps + Motor Amps) X 1.25

<sup>2</sup>Maximum Overcurrent Protection = 2.25 X Motor Amps + Heater Amps

<sup>^</sup>Circuit 1: Single-phase for Air Handlers Circuit 2: Three-phase for HKR3 Heater Kits

---indicates Not Required


Note: The 208 or 240 in the heat kit part number field is for clarification of the nominal voltage for this model.

HEATING KW CORRECTION FACTOR


SUPPLY VOLTAGE	240	230	220	210	208
CORRECTION FACTOR	1.00	0.92	0.84	0.77	0.75

Multiply the 240-volt heating capacity by correction factors.



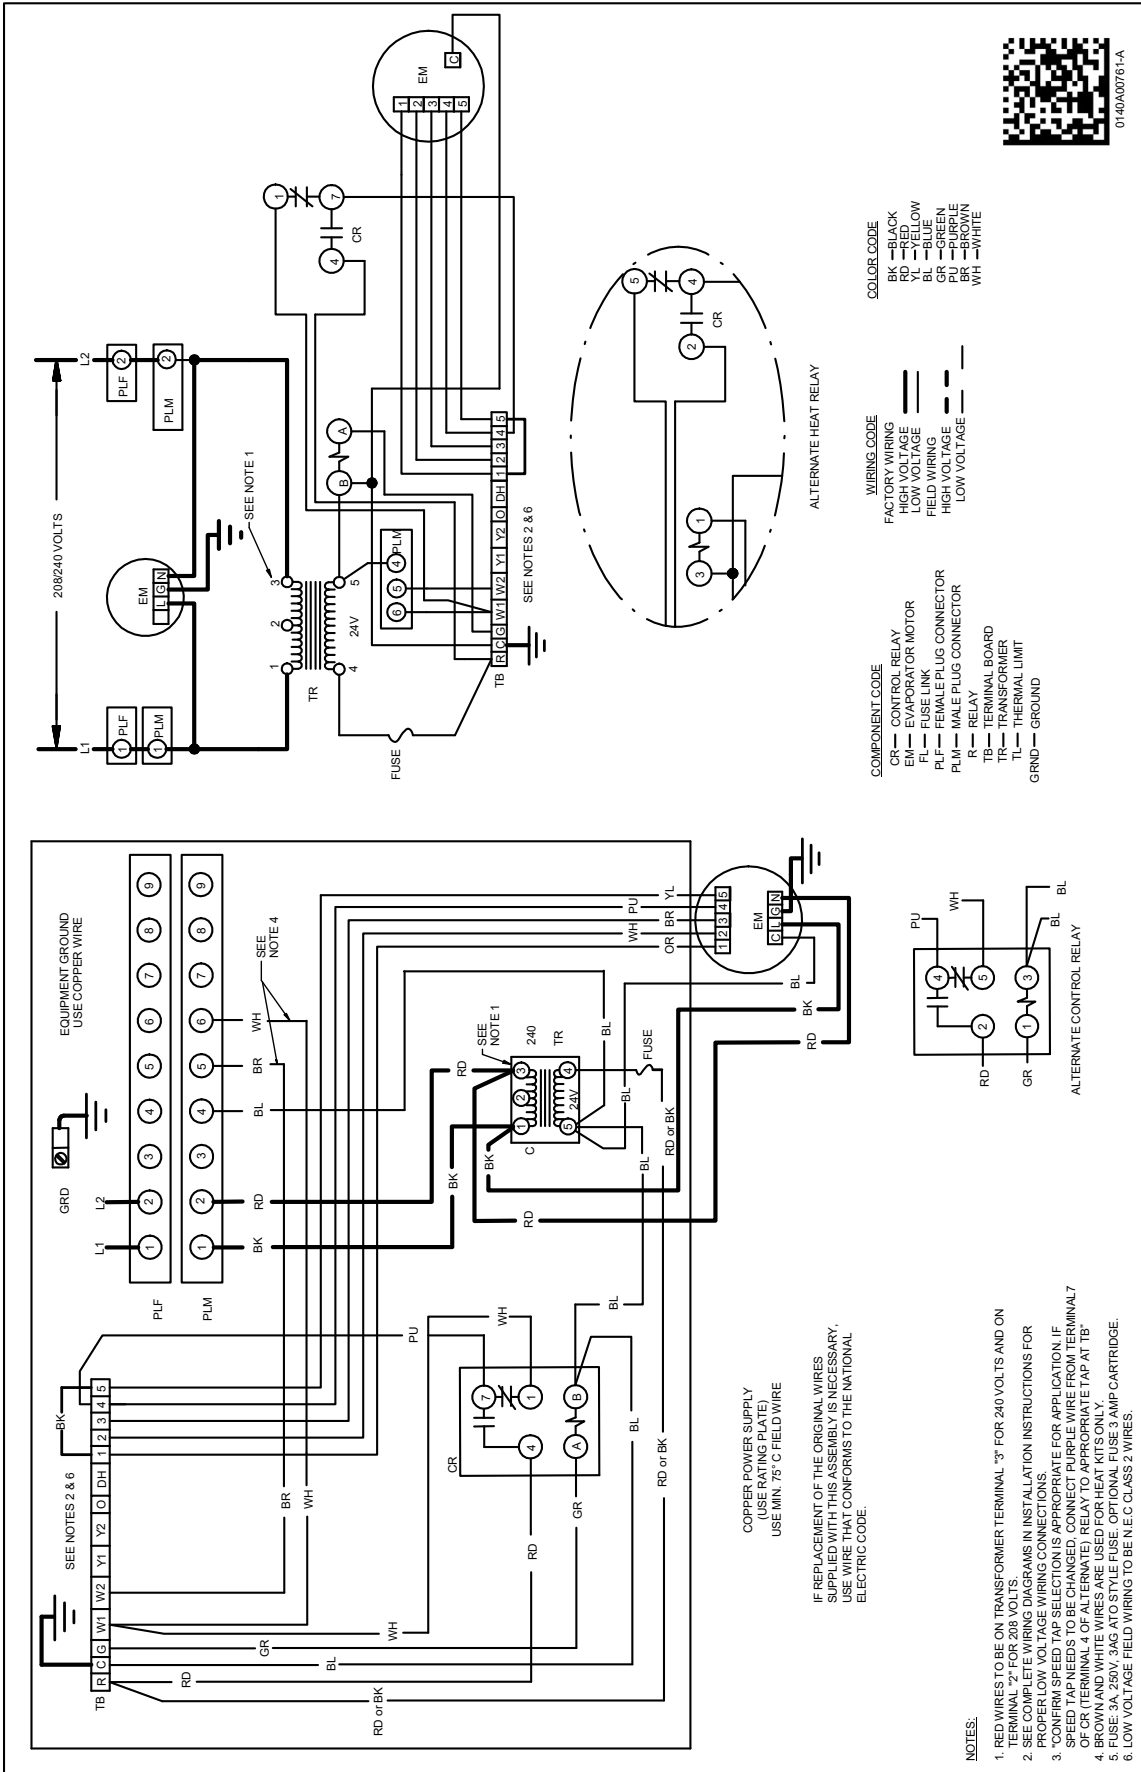

COMPONENT CODE	WIRING CODE	COLOR CODE
CR — CONTROL RELAY	FACTORY WIRING	BK — BLACK
EM — EVAPORATOR MOTOR	LOW VOLTAGE	YL — YELLOW
FL — FUSE LINK	FIELD WIRING	BL — BLUE
PLF — FEMALE PLUG CONNECTOR	HIGH VOLTAGE	GR — GREEN
PLM — MALE PLUG CONNECTOR	LOW VOLTAGE	CR — GREEN
R — RELAY		BR — BROWN
TB — TERMINAL BOARD		WH — WHITE
TR — TRANSFORMER		
TL — THERMAL LIMIT		
GRND — GROUND		



- NOTES:**
1. RED WIRES TO BE ON TRANSFORMER TERMINAL "3" FOR 240 VOLTS AND ON TERMINAL "2" FOR 208 VOLTS.
  2. SEE COMPLETE WIRING DIAGRAMS IN INSTALLATION INSTRUCTIONS FOR PROPER LOW VOLTAGE WIRING CONNECTIONS.
  3. \*CONFIRM SPEED TAP SELECTION IS APPROPRIATE FOR APPLICATION. IF SPEED TAP NEEDS TO BE CHANGED, CONNECT PURPLE WIRE FROM TERMINAL 7 OF CR (TERMINAL 4 OF ALTERNATE) RELAY TO APPROPRIATE TAP AT TB.
  4. BROWN AND WHITE WIRES ARE USED FOR HEAT KITS ONLY.
  5. USE 1/2 AMP CARTRIDGE FUSE.
  6. LOW VOLTAGE FIELD WIRING TO BE N.E.C. CLASS 2 WIRES.


IF REPLACEMENT OF THE ORIGINAL WIRES SUPPLIED WITH THIS ASSEMBLY IS NECESSARY, USE WIRE THAT CONFORMS TO THE NATIONAL ELECTRIC CODE.

COPPER POWER SUPPLY (USE RATING PLATE) USE MIN. 75 °C FIELD WIRE

**WARNING**

**High Voltage:** Disconnect all power before servicing or installing this unit. Multiple power sources may be present. Failure to do so may cause property damage, personal injury, or death.


Wiring is subject to change. Always refer to the wiring diagram on the unit for the most up-to-date wiring.

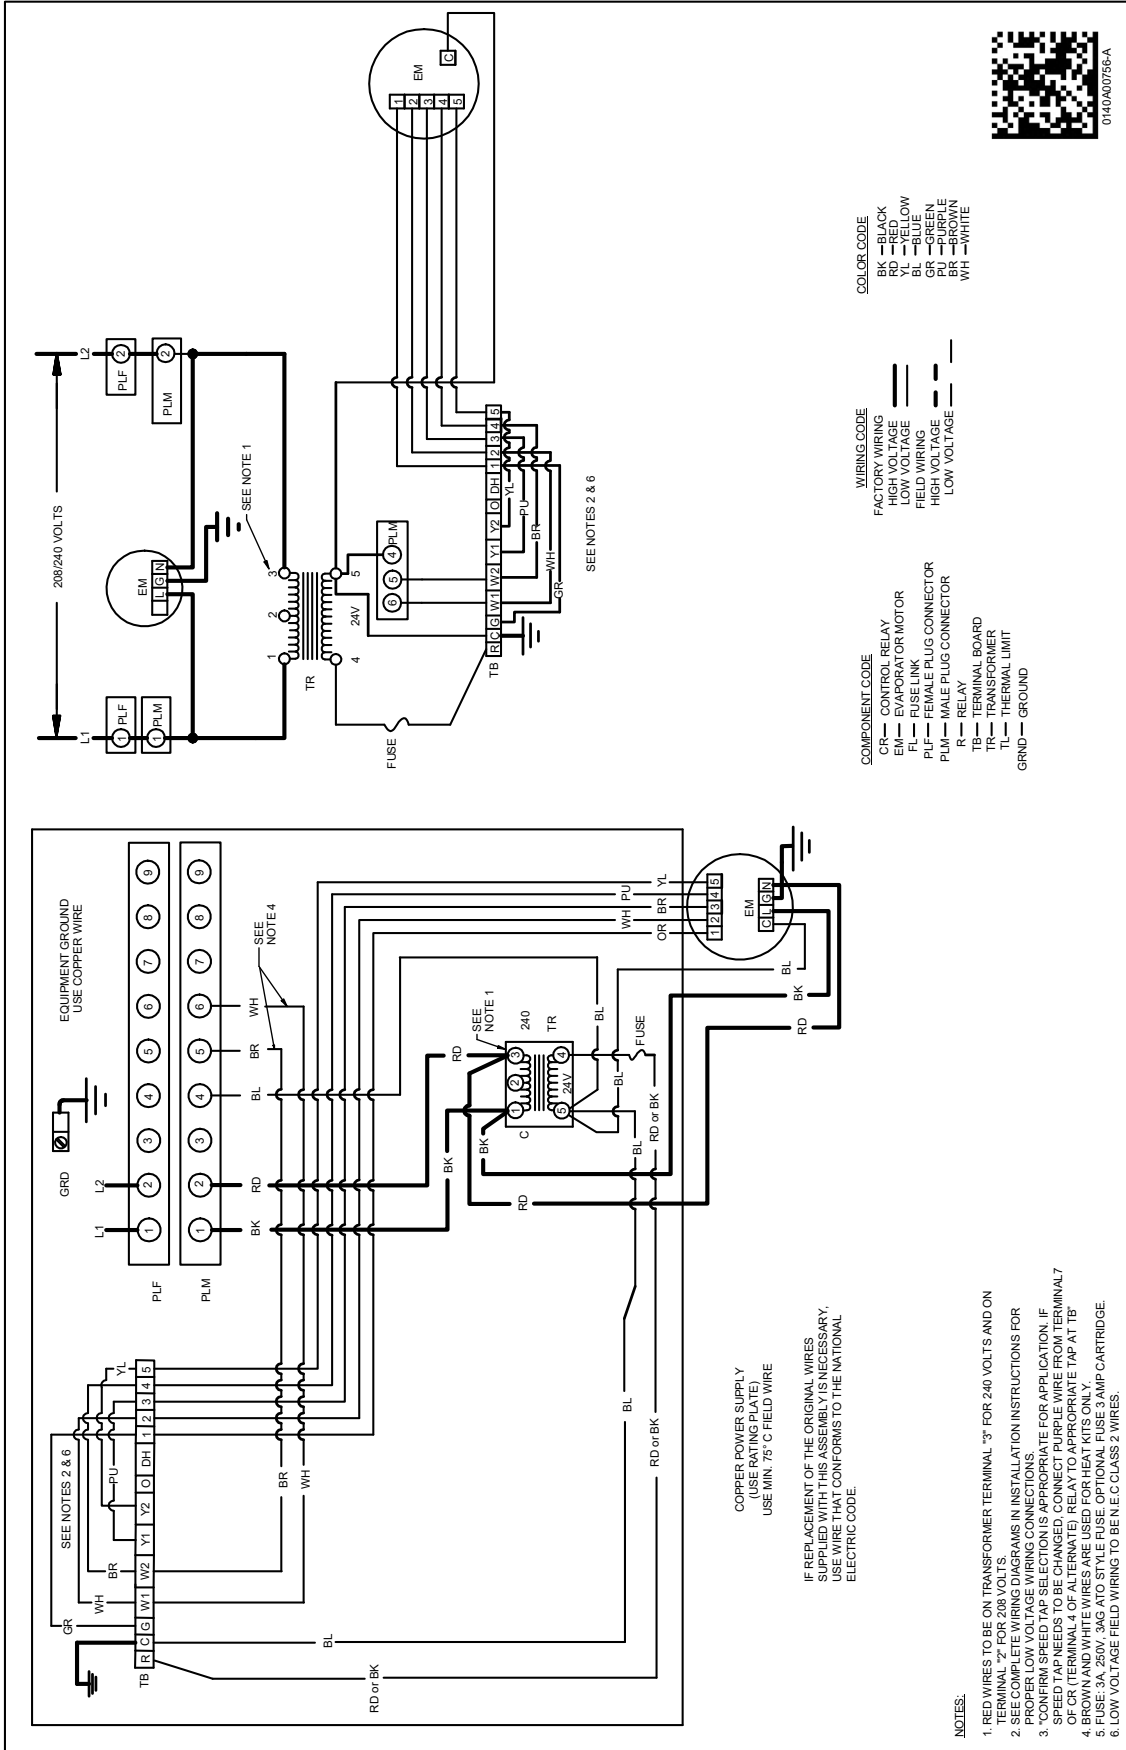

0140A0076CA

**WARNING** **High Voltage:** Disconnect all power before servicing or installing this unit. Multiple power sources may be present. Failure to do so may cause property damage, personal injury, or death.

Wiring is subject to change. Always refer to the wiring diagram on the unit for the most up-to-date wiring.

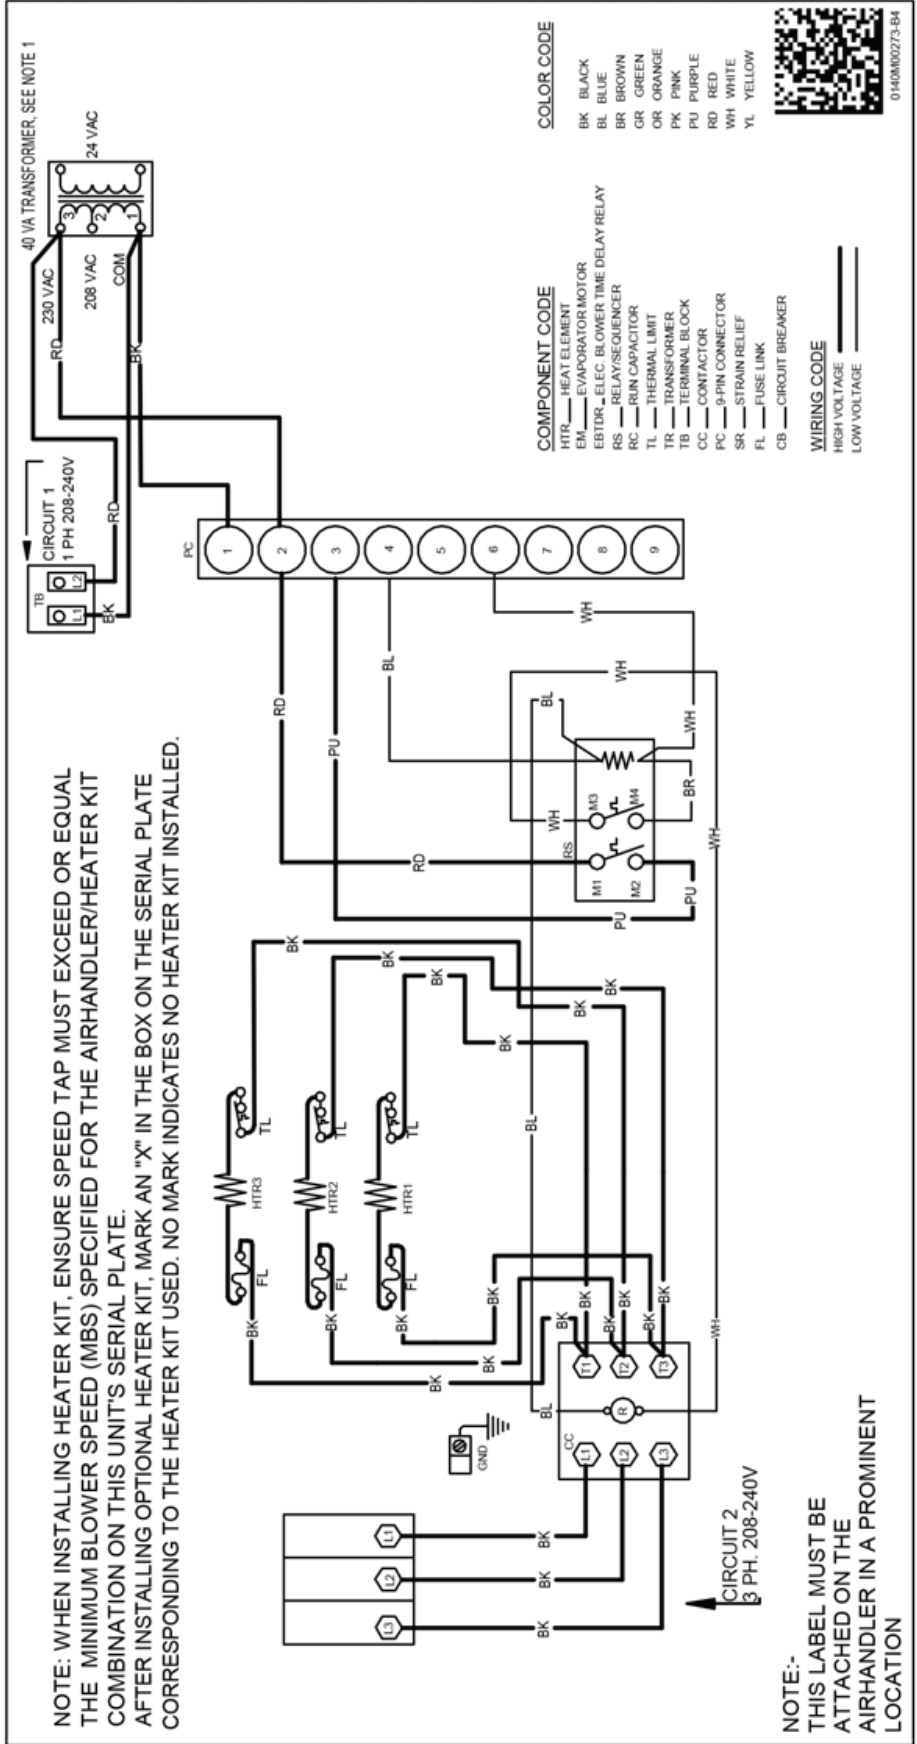

Wiring is subject to change. Always refer to the wiring diagram on the unit for the most up-to-date wiring.



**WARNING**

**High Voltage:** Disconnect all power before servicing or installing this unit. Multiple power sources may be present. Failure to do so may cause property damage, personal injury, or death.



**DOWNFLOW KITS**

DFKE-02	DFKE-03
AMST24BU1400**	AMST48CU1400**
AMST30BU1400**	AMST48DU1400**
AMST36BU1400**	AMST60DU1400**
AMST36CU1400**	
AMST42CU1400**	

**HIGH HUMIDITY KIT**

HHK0004	HHK0005	HHK0006	HHK0007
AMST24BU1400**	AMST36CU1400**	AMST48DU1400**	AMST60DU1400**
AMST30BU1400**	AMST42CU1400**		
AMST36BU1400**	AMST48CU1400**		

**CONDENSATE MANAGEMENT KIT**

CMK0018	CMK0019	CMK0020
AMST24BU1400**	AMST30BU1400**	AMST48CU1400**
AMST36CU1400**	AMST36BU1400**	AMST48DU1400**
	AMST42CU1400**	AMST60DU1400**

**FILTERS**

CHASSIS	PART #	SIZE
B	ALFH16201E	16.0" x 20.0"
C	ALFH1912201E	19.5" x 20.0"
D	ALFH20231E	23.0" x 20.0"

**SINGLE POINT WIRING KIT (SPW-01)**

HEATER KIT MODEL	SPWK-B	SPWK-C	SPWK-D
HKSC15XB-240V	AMST24BU1400**	AMST36CU1400** AMST42CU1400** AMST48CU1400**	AMST48DU1400** AMST60DU1400**
HKSC15XA-208V	AMST30BU1400**		
HKSC15CA-208V	AMST36BU1400**		
HKSC19CB-240V			
HKSC20DA-208V			AMST48DU1400** AMST60DU1400**
HKSC20DB-240V			
HKSC25DA-240V			AMST60DU1400**
HKSC25DA-208V			
HKSC25DA			

Amana® is a registered trademark of Maytag Corporation or its related companies and is used under license. All rights reserved.

Our continuing commitment to quality products may mean a change in specifications without notice.

© 2022 **DAIKIN COMFORT TECHNOLOGIES MANUFACTURING, L.P.** • Houston, Texas • Printed in the USA.