

**PACKAGED HEAT PUMP**  
**13.4 SEER2 / 6.7 HSPF2**  
**2 TO 5 TONS**



**Contents**

Nomenclature..... 2  
 Product Specifications..... 3  
 Expanded Cooling Data..... 4  
 Expanded Heating Data..... 18  
 Airflow Data ..... 20  
 Heat Kit Electrical Specs ..... 22  
 Dimensions ..... 23  
 Wiring Diagrams ..... 24  
 Accessories ..... 26

**Standard Features**


- Energy-efficient scroll compressor
- Multi-speed ECM indoor blower motor
- All-Aluminum evaporator coil
- Copper tube / aluminum fin condenser coils
- Compressor sound blanket
- Liquid-line filter drier
- Convertible airflow: horizontal or downflow
- Electric heat kit available as a field-installed option
- AHRI certified; ETL listed

**Cabinet Features**

- Heavy-gauge galvanized-steel cabinet with attractive two-tone Architectural Gray powder-paint finish
- Aluminum foil-facing internal insulation reinforced with fiberglass scrim
- Fully insulated air-handling compartment with convenient access panels
- Meets cabinet air leakage requirements when tested in accordance with ASHRAE standard 193
- Louvered condenser coil protection
- One footprint for all tonnages
- When properly anchored, meets the 2020 Florida Building Code unit integrity requirements for hurricane-type winds (Anchor bracket kits available)



\* Complete warranty details available from your local dealer or at [www.amana-hac.com](http://www.amana-hac.com). To receive the 10-Year Parts Limited Warranty, online registration must be completed within 60 days of installation. Online registration is not required in California or Quebec. The duration of warranty coverages in Texas differs in some cases.

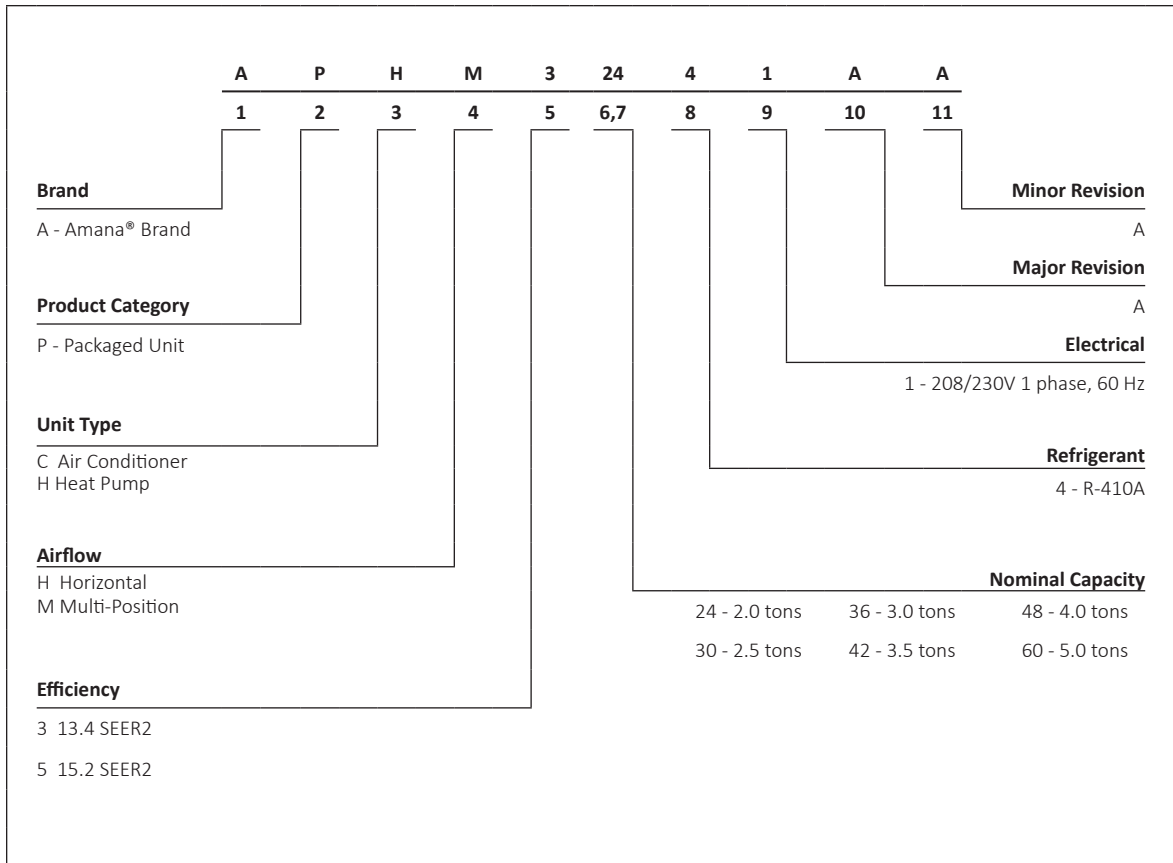

	APHM 32441**	APHM3 3041**	APHM3 3641**	APHM3 4241**	APHM3 4841**	APHM3 6041**
<b>COOLING CAPACITY</b>						
Total BTU/h	24,000	28,000	34,200	40,500	47,500	56,500
Sensible BTU/h	18,600	22,400	26,600	29,500	35,500	42,000
SEER2 / EER2	13.4/10.6	13.4/10.6	13.4/10.6	13.4/10.6	13.4/10.6	13.4/10.6
AHRI Numbers	210288017	210288018	210288019	210288020	210288021	210288022
<b>HEATING CAPACITY</b>						
BTU/h (47°F)	22,800	27,200	33,600	38,000	46,000	55,500
C.O.P. (47°F)	3.46	3.58	3.58	3.54	3.54	3.38
BTU/h (17°F)	13,200	14,800	18,800	21,500	26,500	33,000
C.O.P. (17°F)	2.16	2.18	2.18	2.14	2.26	2.23
HSPF2	6.70	6.70	6.70	6.70	6.70	6.70
<b>EVAPORATOR MOTOR</b>						
Type	ECM	ECM	ECM	ECM	ECM	ECM
Wheel (D x W)	10 x 9	10 x 9	10 x 9	10 x 9	10 x 9	10 x 9
Cooling CFM3	850	1,050	1,200	1,300	1,600	1,850
No. of Speeds	5	5	5	5	5	5
Horsepower - RPM	1/2 - 1050	1/2 - 1050	1/2 - 1050	3/4 - 1050	3/4 - 1050	1 - 1050
<b>EVAPORATOR COIL</b>						
Face Area (ft <sup>2</sup> )	4.55	4.55	4.55	6.2	6.2	6.2
Rows Deep	4	4	4	4	4	4
Fins per Inch	14	14	14	14	14	14
Metering Device Type	Piston	Piston	Piston	Piston	Piston	TXV
Drain Size (NPT)	¼"	¼"	¼"	¼"	¼"	¼"
Refrigerant Charge (oz.)	128	119	115	139	163	170
<b>CONDENSER FAN</b>						
Horsepower - RPM	¼ - 830	¼ - 830	¼ - 830	¼ - 1,075	½ - 1,122	½ - 1,122
Fan Diameter	22	22	22	22	22	22
# of Fan Blades	3	3	3	3	3	3
<b>CONDENSER COIL</b>						
Face Area (ft <sup>2</sup> )	12.08	12.08	12.08	15.09	19.05	19.05
Rows Deep	2	2	2	2	2	2
Fins per Inch	16	16	16	16	16	16
Metering Device Type	Piston	Piston	Piston	Piston	Piston	TXV
<b>COMPRESSOR</b>						
Quantity	1	1	1	1	1	1
Type	Scroll	Scroll	Scroll	Scroll	Scroll	Scroll
Stage	Single	Single	Single	Single	Single	Two
<b>SOUND POWER</b>						
dBA	76	76	81	80	79	80
<b>ELECTRICAL DATA</b>						
Compressor RLA/LRA	12.8 / 58.3	14.1 / 73	15.4 / 83.9	17.9 / 112	19.6 / 130	22.8 / 147.4
Voltage/Phase (60 Hz)	208-230/1	208-230/1	208-230/1	208-230/1	208-230/1	208-230/1
Indoor Blower FLA	3.8	3.8	3.8	5.4	5.4	7
Outdoor Fan FLA	1.3	1.3	1.3	1.4	2	2
M.C.A.1	21.4	23	24.4	29.2	31.9	37.5
M.O.P.2	30	35	35	45	50	60
<b>SHIPPING WEIGHTS (LBS)</b>						
	380	390	400	485	495	495

<sup>1</sup> Wire size should be determined in accordance with National Electrical Codes. Extensive wire runs will require larger wire sizes.

<sup>2</sup> Must use time-delay fuses or HACR-type circuit breakers of the same size as noted.

<sup>3</sup> Factory

**Note:** Always check the S&R plate for electrical data on the unit being installed.

IDB		OUTDOOR AMBIENT TEMPERATURE											ENTERING INDOOR WET BULB TEMPERATURE														
		65°F			75°F			85°F			95°F			105°F			115°F										
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71		
<b>70</b>	700	MBh	24.2	24.6	25.3	-	24.0	24.4	25.1	-	23.4	23.7	24.5	-	22.3	22.6	23.4	-	21.0	21.3	22.0	-	19.7	20.1	20.8	-	
		S/T	0.57	0.49	0.35	-	0.58	0.50	0.36	-	0.60	0.52	0.38	-	1.00	0.54	0.40	-	1.00	0.57	0.43	-	1.00	0.62	0.48	-	
		ΔT	10.61	9.66	7.90	-	10.58	9.64	7.88	-	10.71	9.77	8.01	-	10.57	9.63	7.87	-	10.44	9.50	7.74	-	11.03	10.09	8.33	-	
	800	kW	1.61	1.61	1.60	-	1.81	1.81	1.80	-	2.03	2.03	2.02	-	2.27	2.27	2.26	-	2.54	2.54	2.53	-	2.85	2.85	2.85	-	
		Amps	6.49	6.48	6.47	-	7.40	7.39	7.38	-	8.42	8.41	8.39	-	9.51	9.51	9.49	-	10.74	10.73	10.72	-	12.18	12.17	12.16	-	
		Hi/PR	249	250	252	-	289	290	291	-	330	331	333	-	375	376	377	-	423	424	425	-	474	475	477	-	
	875	Lo/PR	124	125	128	-	131	133	136	-	138	139	143	-	144	145	148	-	149	151	154	-	156	158	161	-	
		MBh	24.5	24.9	25.6	-	24.3	24.6	25.4	-	23.7	24.0	24.7	-	22.6	22.9	23.6	-	21.2	21.6	22.3	-	20.0	20.3	21.1	-	
		S/T	0.65	0.57	0.43	-	0.65	0.57	0.43	-	0.68	0.60	0.46	-	1.00	0.62	0.48	-	1.00	0.64	0.50	-	1.00	0.69	0.56	-	
	<b>75</b>	700	ΔT	10.01	9.06	7.30	-	9.98	9.04	7.28	-	10.11	9.17	7.41	-	9.97	9.03	7.27	-	9.84	8.90	7.14	-	10.43	9.49	7.73	-
			kW	1.63	1.63	1.62	-	1.83	1.82	1.82	-	2.05	2.05	2.04	-	2.28	2.28	2.28	-	2.56	2.55	2.55	-	2.87	2.87	2.86	-
			Amps	6.57	6.57	6.55	-	7.48	7.47	7.46	-	8.50	8.49	8.47	-	9.59	9.59	9.57	-	10.82	10.81	10.80	-	12.26	12.25	12.24	-
		800	Hi/PR	253	254	255	-	292	293	295	-	333	335	336	-	378	379	381	-	426	427	429	-	477	478	480	-
Lo/PR			127	128	131	-	134	136	139	-	141	142	146	-	146	148	151	-	152	154	157	-	159	160	164	-	
MBh			24.7	25.1	25.8	-	24.5	24.9	25.6	-	23.9	24.2	25.0	-	22.8	23.1	23.9	-	21.4	21.8	22.5	-	20.2	20.6	21.3	-	
875		S/T	0.68	0.61	0.47	-	0.69	0.61	0.47	-	0.72	0.64	0.50	-	1.00	0.66	0.52	-	1.00	0.68	0.54	-	1.00	0.73	0.59	-	
		ΔT	9.63	8.68	6.92	-	9.60	8.66	6.90	-	9.73	8.79	7.03	-	9.59	8.65	6.89	-	9.47	8.52	6.76	-	10.06	9.11	7.35	-	
		Amps	6.57	6.57	6.55	-	7.48	7.47	7.46	-	8.50	8.49	8.47	-	9.59	9.59	9.57	-	10.82	10.81	10.80	-	12.26	12.25	12.24	-	
<b>75</b>		700	Hi/PR	249	250	252	-	289	290	292	-	330	331	333	-	375	376	378	-	423	424	426	-	474	475	477	-
			Lo/PR	124	125	128	-	131	133	136	-	138	140	143	-	144	145	148	-	149	151	154	-	156	158	161	-
			MBh	24.5	24.9	25.6	-	24.3	24.7	25.4	-	23.7	24.0	24.7	-	22.6	22.9	23.6	-	21.2	21.6	22.3	-	20.0	20.4	21.1	-
		800	S/T	0.78	0.70	0.56	-	0.78	0.71	0.57	-	1.00	0.73	0.59	-	1.00	0.75	0.61	-	1.00	0.77	0.64	-	1.00	1.00	0.69	-
	ΔT		12.08	11.14	9.38	-	12.05	11.11	9.35	-	12.19	11.24	9.48	-	12.04	11.10	9.34	-	11.92	10.97	9.21	-	12.51	11.57	9.80	-	
	kW		1.62	1.62	1.61	-	1.82	1.82	1.81	-	2.04	2.04	2.03	-	2.28	2.28	2.27	-	2.55	2.55	2.54	-	2.86	2.86	2.86	-	
	875	Amps	6.54	6.53	6.51	-	7.44	7.44	7.42	-	8.46	8.45	8.44	-	9.56	9.55	9.53	-	10.78	10.78	10.76	-	12.22	12.22	12.20	-	
		Hi/PR	251	252	254	-	291	292	294	-	332	333	335	-	377	378	380	-	425	426	428	-	476	477	479	-	
		Lo/PR	125	127	130	-	133	134	138	-	140	141	144	-	145	147	150	-	151	152	155	-	158	159	162	-	

IDB: Entering Indoor Dry Bulb Temperature  
 High & low pressures are measured at the liquid & suction access fittings.  
 Shaded area reflects ACCA (TVA) conditions  
 kW = Total system power  
 Amps = outdoor unit amps (comp. + fans)















		OUTDOOR AMBIENT TEMPERATURE												ENTERING INDOOR WET BULB TEMPERATURE												
		65°F				75°F				85°F				95°F				105°F				115°F				
IDB	AIRFLOW	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	
80	1300	MBh	42.0	42.6	43.8	45.7	41.6	42.2	43.4	45.3	40.5	41.1	42.4	44.2	38.7	39.3	40.5	42.4	36.4	37.0	38.2	40.1	34.4	34.9	36.2	38.1
		S/T	1.00	0.82	0.69	0.6	1.00	0.83	0.70	0.6	1.00	1.00	0.72	0.6	1.00	1.00	0.74	0.6	1.00	1.00	0.76	0.6	1.00	1.00	0.81	0.7
		ΔT	18.80	17.52	15.12	12.6	18.77	17.48	15.08	12.6	18.95	17.66	15.26	12.8	18.75	17.47	15.07	12.6	18.58	17.30	14.90	12.4	19.39	18.10	15.70	13.2
	1400	kW	2.72	2.71	2.71	2.7	3.06	3.06	3.05	3.1	3.44	3.44	3.44	3.5	3.86	3.86	3.85	3.9	4.33	4.32	4.32	4.3	4.87	4.87	4.86	4.9
		Amps	10.96	10.94	10.92	11.0	12.53	12.52	12.49	12.6	14.29	14.28	14.25	14.4	16.20	16.19	16.16	16.3	18.33	18.31	18.29	18.4	20.82	20.81	20.78	20.9
		Hi/PR	262	263	265	269.7	303	304	306	310.7	346	347	349	353.5	392	393	395	399.7	442	443	445	449.5	495	496	498	502.6
	Lo/PR	129	131	134	139.5	137	139	142	147.2	144	145	149	154.0	149	151	154	159.7	155	157	160	165.3	162	164	167	172.3	
	1575	MBh	42.4	43.0	44.2	46.1	42.0	42.6	43.8	45.7	40.9	41.5	42.7	44.6	39.1	39.7	40.9	42.8	36.8	37.4	38.6	40.5	34.7	35.3	36.6	38.4
		S/T	1.00	0.84	0.71	0.6	1.00	0.85	0.72	0.6	1.00	1.00	0.74	0.6	1.00	1.00	0.76	0.6	1.00	1.00	0.78	0.6	1.00	1.00	1.00	0.7
		ΔT	18.39	17.10	14.70	12.2	18.35	17.07	14.67	12.2	18.53	17.25	14.85	12.4	18.34	17.06	14.65	12.2	18.17	16.88	14.48	12.0	18.97	17.69	15.29	12.8
	85	kW	2.72	2.72	2.72	2.7	3.07	3.07	3.06	3.1	3.45	3.45	3.45	3.5	3.87	3.87	3.86	3.9	4.33	4.33	4.33	4.4	4.88	4.88	4.87	4.9
		Amps	11.00	10.99	10.96	11.1	12.58	12.56	12.54	12.7	14.34	14.32	14.30	14.4	16.24	16.23	16.20	16.3	18.37	18.36	18.33	18.5	20.87	20.86	20.83	20.9
		Hi/PR	264	265	267	271.0	304	306	307	312.0	347	348	350	354.8	394	395	396	401.0	443	444	446	450.8	496	498	499	503.9
	Lo/PR	133	135	138	143.2	138	140	143	148.5	145	147	150	155.2	151	152	156	160.9	156	158	161	166.5	163	165	168	173.6	

85	1460	MBh	42.3	43.1	45.2	48.2	41.3	42.1	44.1	47.1	40.3	41.1	43.1	45.9	39.4	40.1	42.0	44.8	37.4	38.1	39.9	42.6	34.6	35.3	37.0	39.4
		S/T	0.95	0.92	0.83	0.7	0.98	0.95	0.86	0.7	1.00	0.97	0.88	0.7	1.00	1.00	0.91	0.7	1.00	1.00	0.94	0.8	1.00	1.00	0.95	0.8
		ΔT	25	25	24	20	26	25	24	21	25	25	24	21	25	25	24	21	24	24	24	20	22	22	22	19.1
	1300	kW	2.89	2.96	3.05	3.1	3.12	3.19	3.29	3.4	3.32	3.39	3.51	3.6	3.50	3.57	3.69	3.8	3.65	3.73	3.85	4.0	3.78	3.86	3.99	4.1
		Amps	13.4	13.6	14.0	14.5	14.3	14.6	15.0	15.5	15.3	15.7	16.1	16.7	16.3	16.6	17.1	17.7	17.2	17.6	18.1	18.7	18.1	18.5	19.1	19.7
		Hi/PR	259	279	294	307.2	291	313	330	344.7	331	356	376	392.0	377	405	428	446.4	424	456	482	502.2	468	504	532	554.9
	Lo/PR	112	119	130	138.2	118	126	137	146.0	123	130	142	151.7	129	137	150	159.4	135	144	157	167.0	140	149	162	172.8	
	1140	MBh	41.1	41.9	43.9	46.8	40.1	40.9	42.8	45.7	39.2	39.9	41.8	44.6	38.2	39.0	40.8	43.5	36.3	37.0	38.8	41.3	33.6	34.3	35.9	38.3
		S/T	0.90	0.87	0.79	0.6	0.94	0.90	0.82	0.7	0.96	0.93	0.84	0.7	0.99	0.96	0.86	0.7	1.00	0.99	0.90	0.7	1.00	1.00	0.90	0.7
		ΔT	26	26	24	21	27	26	25	21	27	26	25	21	27	26	25	22	26	26	25	21	24	24	23	19.9
	85	kW	2.87	2.93	3.03	3.1	3.09	3.16	3.26	3.4	3.29	3.37	3.48	3.6	3.47	3.54	3.66	3.8	3.62	3.70	3.82	4.0	3.74	3.83	3.96	4.1
		Amps	13.3	13.5	13.9	14.3	14.2	14.5	14.9	15.4	15.2	15.5	16.0	16.5	16.1	16.5	17.0	17.5	17.1	17.4	17.9	18.6	18.0	18.3	18.9	19.5
		Hi/PR	257	276	292	304.1	288	310	327	341.2	327	352	372	388.1	373	401	424	442.0	420	452	477	497.3	464	499	527	549.4
	Lo/PR	111	118	128	136.8	117	124	136	144.5	121	129	141	150.2	128	136	148	157.8	134	142	155	165.4	138	147	161	171.1	

IDB: Entering Indoor Dry Bulb Temperature  
 High & low pressures are measured at the liquid & suction access fittings.  
 Shaded area reflects AHRI (TVA) conditions  
 kW = Total system power  
 Amps = outdoor unit amps (comp. + fans)

EXPANDED COOLING DATA — APHM34841\*\*

		OUTDOOR AMBIENT TEMPERATURE																							
		65°F				75°F				85°F				95°F				105°F				115°F			
		ENTERING INDOOR WET BULB TEMPERATURE																							
IDB	AIRFLOW	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71
<b>70</b>	MBh	48.3	49.0	50.5	-	47.9	48.6	50.0	-	46.6	47.3	48.8	-	44.5	45.1	46.6	-	41.8	42.5	43.9	-	39.4	40.1	41.5	-
	S/T	0.60	0.53	0.39	-	0.61	0.53	0.40	-	0.63	0.56	0.42	-	1.00	0.58	0.44	-	1.00	0.60	0.46	-	1.00	0.65	0.51	-
	ΔT	13.35	12.11	9.81	-	13.32	12.08	9.78	-	13.49	12.25	9.95	-	13.30	12.07	9.76	-	13.14	11.90	9.60	-	13.91	12.68	10.37	-
	kW	3.22	3.21	3.21	-	3.60	3.60	3.59	-	4.04	4.03	4.03	-	4.51	4.50	4.50	-	5.03	5.03	5.02	-	5.64	5.64	5.64	-
	Amps	12.46	12.44	12.41	-	14.23	14.22	14.19	-	16.22	16.20	16.17	-	18.36	18.35	18.32	-	20.76	20.75	20.72	-	23.57	23.56	23.53	-
	Hi PR	264	265	267	-	305	307	308	-	349	350	352	-	396	397	399	-	447	448	450	-	501	502	504	-
	Lo PR	126	127	131	-	133	135	138	-	140	142	145	-	146	147	151	-	151	153	156	-	158	160	163	-
<b>1400</b>	MBh	49.0	49.6	51.1	-	48.5	49.2	50.7	-	47.3	47.9	49.4	-	45.1	45.8	47.2	-	42.4	43.1	44.6	-	40.0	40.7	42.1	-
	S/T	0.66	0.58	0.45	-	0.67	0.59	0.46	-	0.69	0.62	0.48	-	1.00	0.64	0.50	-	1.00	0.66	0.52	-	1.00	0.71	0.57	-
	ΔT	12.60	11.37	9.06	-	12.57	11.34	9.03	-	12.74	11.51	9.20	-	12.56	11.32	9.02	-	12.39	11.16	8.85	-	13.17	11.93	9.63	-
	kW	3.24	3.23	3.23	-	3.62	3.62	3.61	-	4.06	4.05	4.05	-	4.53	4.52	4.52	-	5.05	5.05	5.04	-	5.66	5.66	5.66	-
	Amps	12.55	12.53	12.50	-	14.33	14.31	14.28	-	16.31	16.29	16.26	-	18.45	18.44	18.41	-	20.85	20.84	20.81	-	23.67	23.65	23.62	-
	Hi PR	266	267	269	-	308	309	311	-	351	352	354	-	398	399	401	-	449	450	452	-	503	504	506	-
	Lo PR	128	129	132	-	135	137	140	-	142	144	147	-	148	149	152	-	153	155	158	-	160	162	165	-
<b>1800</b>	MBh	49.7	50.4	51.8	-	49.3	50.0	51.4	-	48.0	48.7	50.2	-	45.9	46.5	48.0	-	43.2	43.9	45.3	-	40.8	41.5	42.9	-
	S/T	0.69	0.62	0.48	-	0.70	0.62	0.49	-	1.00	0.65	0.52	-	1.00	0.67	0.53	-	1.00	0.69	0.56	-	1.00	1.00	0.61	-
	ΔT	11.98	10.74	8.44	-	11.94	10.71	8.40	-	12.12	10.88	8.58	-	11.93	10.69	8.39	-	11.76	10.53	8.22	-	12.54	11.30	9.00	-
	kW	3.25	3.25	3.24	-	3.64	3.64	3.63	-	4.07	4.07	4.06	-	4.54	4.54	4.53	-	5.07	5.06	5.06	-	5.68	5.68	5.67	-
	Amps	12.63	12.61	12.58	-	14.40	14.39	14.36	-	16.39	16.37	16.34	-	18.53	18.52	18.49	-	20.93	20.92	20.89	-	23.74	23.73	23.70	-
	Hi PR	268	269	271	-	310	311	313	-	353	355	356	-	400	402	403	-	451	452	454	-	505	506	508	-
	Lo PR	130	131	134	-	137	139	142	-	144	146	149	-	150	151	154	-	155	157	160	-	162	164	167	-

<b>1400</b>	MBh	48.4	49.0	50.5	52.7	47.9	48.6	50.0	52.3	46.7	47.3	48.8	51.0	44.5	45.2	46.6	48.8	41.8	42.5	44.0	46.2	39.4	40.1	41.5	43.7
	S/T	0.73	0.65	0.52	0.4	1.00	0.66	0.53	0.4	1.00	0.68	0.55	0.4	1.00	0.70	0.57	0.4	1.00	0.73	0.59	0.4	1.00	1.00	0.64	0.5
	ΔT	16.06	14.83	12.52	10.1	16.03	14.80	12.49	10.1	16.20	14.97	12.66	10.3	16.02	14.78	12.48	10.1	15.85	14.62	12.31	9.9	16.63	15.39	13.09	10.7
	kW	3.21	3.21	3.20	3.2	3.60	3.60	3.59	3.6	4.03	4.03	4.03	4.1	4.50	4.50	4.49	4.5	5.03	5.02	5.02	5.0	5.64	5.64	5.63	5.7
	Amps	12.44	12.43	12.40	12.5	14.22	14.21	14.18	14.3	16.20	16.19	16.16	16.3	18.35	18.34	18.31	18.4	20.75	20.73	20.70	20.8	23.56	23.55	23.52	23.7
	Hi PR	264	265	267	271.6	306	307	309	313.2	349	350	352	356.8	396	397	399	403.8	447	448	450	454.4	501	502	504	508.4
	Lo PR	126	127	131	135.9	133	135	138	143.6	140	142	145	150.3	146	147	151	155.9	151	153	156	161.5	158	160	163	168.4
<b>1600</b>	MBh	49.0	49.7	51.1	53.3	48.6	49.2	50.7	52.9	47.3	48.0	49.4	51.6	45.1	<b>45.8</b>	47.2	49.5	42.5	43.2	44.6	46.8	40.0	40.7	42.2	44.4
	S/T	0.79	0.71	0.58	0.4	1.00	0.72	0.58	0.4	1.00	0.74	0.61	0.5	1.00	<b>0.76</b>	0.63	0.5	1.00	1.00	0.65	0.5	1.00	1.00	0.70	0.6
	ΔT	15.32	14.08	11.78	9.4	15.28	14.05	11.74	9.4	15.46	14.22	11.92	9.5	15.27	<b>14.04</b>	11.73	9.3	15.11	13.87	11.57	9.2	15.88	14.64	12.34	10.0
	kW	3.23	3.23	3.22	3.3	3.62	3.62	3.61	3.6	4.05	4.05	4.05	4.1	4.52	<b>4.52</b>	4.51	4.5	5.05	5.04	5.04	5.1	5.66	5.66	5.65	5.7
	Amps	12.54	12.52	12.49	12.6	14.31	14.30	14.27	14.4	16.30	16.28	16.25	16.4	18.44	<b>18.43</b>	18.40	18.5	20.84	20.83	20.80	20.9	23.65	23.64	23.61	23.7
	Hi PR	266	267	269	273.8	308	309	311	315.5	351	353	354	359.1	398	<b>400</b>	401	406.0	449	450	452	456.7	503	504	506	510.7
	Lo PR	128	129	132	137.8	135	137	140	145.4	142	144	147	152.1	148	<b>149</b>	152	157.8	153	155	158	163.3	160	162	165	170.3
<b>1800</b>	MBh	49.8	50.4	51.9	54.1	49.3	50.0	51.4	53.6	48.1	48.7	50.2	52.4	45.9	46.6	48.0	50.2	43.2	43.9	45.4	47.6	40.8	41.5	42.9	45.1
	S/T	0.82	0.75	0.61	0.5	1.00	0.75	0.62	0.5	1.00	0.78	0.64	0.5	1.00	0.80	0.66	0.5	1.00	1.00	0.68	0.5	1.00	1.00	0.74	0.6
	ΔT	14.69	13.46	11.15	8.8	14.66	13.42	11.12	8.7	14.83	13.60	11.29	8.9	14.64	13.41	11.10	8.7	14.48	13.24	10.94	8.6	15.25	14.02	11.71	9.3
	kW	3.25	3.25	3.24	3.3	3.64	3.64	3.63	3.7	4.07	4.07	4.06	4.1	4.54	4.54	4.53	4.6	5.06	5.06	5.05	5.1	5.68	5.68	5.67	5.7
	Amps	12.61	12.60	12.57	12.7	14.39	14.38	14.35	14.5	16.37	16.36	16.33	16.5	18.52	18.51	18.48	18.6	20.92	20.90	20.87	21.0	23.73	23.72	23.69	23.8
	Hi PR	268	270	271	276.0	310	311	313	317.6	354	355	357	361.3	401	402	404	408.2	451	452	454	458.8	505	506	508	512.9
	Lo PR	130	131	134	139.8	137	139	142	147.5	144	146	149	154.2	150	151	154	159.8	155	157	160	165.4	162	164	167	172.3

IDB: Entering Indoor Dry Bulb Temperature  
 High & low pressures are measured at the liquid & suction access fittings.  
 Shaded area reflects ACCA (TVA) conditions  
 kW = Total system power  
 Amps = outdoor unit amps (comp. + fans)





EXPANDED COOLING DATA — APHM36041\*\* — HIGH STAGE (CONT.)

IDB	65°F				75°F				85°F				95°F				105°F				115°F			
	OUTDOOR AMBIENT TEMPERATURE																							
	ENTERING INDOOR WET BULB TEMPERATURE																							
AIRFLOW	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71
Mb/h	56.2	56.9	58.6	61.1	55.7	56.5	58.1	60.6	54.2	55.0	56.7	59.2	51.7	52.5	54.2	56.7	48.7	49.5	51.1	53.7	45.9	46.7	48.3	50.9
S/T	1.00	0.81	0.68	0.5	1.00	0.82	0.68	0.5	1.00	0.84	0.71	0.6	1.00	1.00	0.73	0.6	1.00	1.00	0.75	0.6	1.00	1.00	0.80	0.7
$\Delta T$	26.90	25.09	21.71	18.2	26.85	25.04	21.66	18.2	27.10	25.29	21.91	18.4	26.83	25.02	21.64	18.1	26.59	24.78	21.40	17.9	27.72	25.91	22.53	19.0
kW	3.72	3.71	3.71	3.7	4.16	4.15	4.15	4.2	4.65	4.65	4.64	4.7	5.18	5.18	5.17	5.2	5.78	5.78	5.77	5.8	6.48	6.47	6.47	6.5
Amps	13.29	13.27	13.24	13.4	15.21	15.19	15.16	15.3	17.35	17.33	17.30	17.4	19.67	19.65	19.62	19.8	22.25	22.24	22.21	22.4	25.29	25.28	25.24	25.4
Hi PR	283	285	286	291.4	328	329	331	335.8	374	375	377	382.2	424	425	427	432.3	478	479	481	486.2	536	537	539	543.8
Lo PR	125	126	130	134.8	132	134	137	142.3	139	140	144	148.8	144	146	149	154.4	150	151	155	159.8	157	158	161	166.6
Mb/h	56.5	57.3	58.9	61.5	56.0	56.8	58.4	61.0	54.6	55.3	57.0	59.5	52.1	52.8	54.5	57.0	49.0	49.8	51.5	54.0	46.2	47.0	48.7	51.2
S/T	1.00	0.83	0.70	0.6	1.00	0.84	0.71	0.6	1.00	0.86	0.73	0.6	1.00	1.00	0.75	0.6	1.00	1.00	0.77	0.6	1.00	1.00	0.82	0.7
$\Delta T$	26.45	24.64	21.26	17.8	26.40	24.59	21.21	17.7	26.65	24.85	21.47	18.0	26.38	24.57	21.19	17.7	26.14	24.33	20.95	17.5	27.27	25.46	22.09	18.6
kW	3.73	3.72	3.71	3.7	4.17	4.16	4.16	4.2	4.66	4.66	4.65	4.7	5.19	5.19	5.18	5.2	5.79	5.78	5.78	5.8	6.49	6.48	6.48	6.5
Amps	13.33	13.31	13.28	13.4	15.25	15.23	15.20	15.3	17.39	17.37	17.34	17.5	19.71	19.69	19.66	19.8	22.30	22.28	22.25	22.4	25.33	25.32	25.29	25.4
Hi PR	284	286	288	292.4	329	330	332	336.8	375	376	378	383.3	425	426	428	433.3	479	480	482	487.3	537	538	540	544.8
Lo PR	126	127	130	135.6	133	135	138	143.1	140	141	144	149.6	145	147	150	155.2	151	152	155	160.6	158	159	162	167.4
Mb/h	58.1	58.9	60.6	63.1	57.6	58.4	60.1	62.6	56.2	57.0	58.6	61.1	53.7	54.5	56.1	58.7	50.6	51.4	53.1	55.6	47.9	48.6	50.3	52.8
S/T	1.00	0.88	0.74	0.6	1.00	0.88	0.75	0.6	1.00	0.91	0.77	0.6	1.00	1.00	0.79	0.7	1.00	1.00	0.82	0.7	1.00	1.00	0.87	0.7
$\Delta T$	24.93	23.12	19.74	16.2	24.88	23.07	19.69	16.2	25.13	23.32	19.94	16.4	24.86	23.05	19.67	16.2	24.62	22.81	19.43	15.9	25.75	23.94	20.56	17.1
kW	3.76	3.75	3.75	3.8	4.20	4.20	4.19	4.2	4.69	4.69	4.68	4.7	5.22	5.22	5.21	5.2	5.82	5.82	5.81	5.8	6.52	6.51	6.51	6.5
Amps	13.47	13.45	13.42	13.6	15.38	15.37	15.34	15.5	17.53	17.51	17.48	17.6	19.84	19.83	19.80	19.9	22.43	22.42	22.39	22.5	25.47	25.46	25.42	25.6
Hi PR	288	290	292	296.4	333	334	336	340.8	379	380	382	387.3	429	430	432	437.3	483	484	486	491.3	541	542	544	548.9
Lo PR	129	131	134	139.2	137	138	141	146.7	143	145	148	153.3	149	150	154	158.8	154	156	159	164.3	161	163	166	171.1

Mb/h	57.1	57.9	59.5	62.1	56.6	57.4	59.0	61.6	55.2	55.9	57.6	60.1	52.7	53.4	55.1	57.6	49.6	50.4	52.1	54.6	46.8	47.6	49.3	51.8
S/T	1.00	0.91	0.78	0.6	1.00	1.00	0.78	0.6	1.00	1.00	0.81	0.7	1.00	1.00	0.83	0.7	1.00	1.00	0.85	0.7	1.00	1.00	1.00	0.8
$\Delta T$	30.45	28.64	25.26	21.8	30.40	28.59	25.21	21.7	30.65	28.84	25.47	22.0	30.38	28.57	25.19	21.7	30.14	28.33	24.95	21.5	31.27	29.46	26.08	22.6
kW	3.72	3.72	3.71	3.7	4.17	4.16	4.15	4.2	4.66	4.65	4.65	4.7	5.19	5.19	5.18	5.2	5.79	5.78	5.78	5.8	6.49	6.48	6.47	6.5
Amps	13.32	13.31	13.28	13.4	15.24	15.23	15.20	15.3	17.38	17.37	17.34	17.5	19.70	19.69	19.65	19.8	22.29	22.28	22.24	22.4	25.33	25.31	25.28	25.4
Hi PR	285	286	288	292.7	329	330	332	337.1	375	377	379	383.6	426	427	429	433.6	479	481	483	487.6	537	538	540	545.2
Lo PR	127	128	131	136.6	134	136	139	144.1	141	142	145	150.7	146	148	151	156.2	152	153	156	161.7	159	160	163	168.5
Mb/h	57.4	58.2	59.9	62.4	56.9	57.7	59.4	61.9	55.5	56.3	57.9	60.5	53.0	53.8	55.4	58.0	50.0	50.7	52.4	54.9	47.2	48.0	49.6	52.1
S/T	1.00	0.93	0.80	0.7	1.00	1.00	0.81	0.7	1.00	1.00	0.83	0.7	1.00	1.00	0.85	0.7	1.00	1.00	0.87	0.7	1.00	1.00	1.00	0.8
$\Delta T$	30.00	28.19	24.81	21.3	29.95	28.14	24.76	21.3	30.21	28.40	25.02	21.5	29.93	28.12	24.75	21.2	29.69	27.88	24.50	21.0	30.82	29.01	25.64	22.1
kW	3.73	3.73	3.72	3.8	4.18	4.17	4.16	4.2	4.67	4.66	4.66	4.7	5.20	5.20	5.19	5.2	5.80	5.79	5.79	5.8	6.50	6.49	6.48	6.5
Amps	13.37	13.35	13.32	13.5	15.28	15.27	15.24	15.4	17.43	17.41	17.38	17.5	19.74	19.73	19.69	19.8	22.33	22.32	22.28	22.4	25.37	25.35	25.32	25.5
Hi PR	286	287	289	293.7	330	331	333	338.1	376	378	380	384.6	427	428	430	434.6	480	482	484	488.6	538	539	541	546.2
Lo PR	127	129	132	137.4	135	137	140	144.9	142	143	146	151.5	147	149	152	157.0	153	154	157	162.5	159	161	164	169.3
Mb/h	59.1	59.8	61.5	64.0	58.6	59.3	61.0	63.5	57.1	57.9	59.5	62.1	54.6	55.4	57.1	59.6	51.6	52.4	54.0	56.5	48.8	49.6	51.2	53.8
S/T	1.00	0.98	0.84	0.7	1.00	1.00	0.85	0.7	1.00	1.00	0.87	0.7	1.00	1.00	0.89	0.8	1.00	1.00	0.90	0.8	1.00	1.00	1.00	0.8
$\Delta T$	28.48	26.67	23.29	19.8	28.43	26.62	23.24	19.7	28.68	26.87	23.50	20.0	28.41	26.60	23.22	19.7	28.17	26.36	22.98	19.5	29.30	27.49	24.11	20.6
kW	3.77	3.76	3.75	3.8	4.21	4.20	4.20	4.2	4.70	4.70	4.69	4.7	5.23	5.23	5.22	5.3	5.83	5.82	5.82	5.9	6.53	6.52	6.52	6.5
Amps	13.50	13.49	13.46	13.6	15.42	15.41	15.37	15.5	17.56	17.55	17.52	17.7	19.88	19.87	19.83	20.0	22.47	22.45	22.42	22.6	25.51	25.49	25.46	25.6
Hi PR	290	291	293	297.8	334	335	337	342.1	381	382	384	388.6	431	432	434	438.7	485	486	488	492.6	542	543	545	550.2
Lo PR	131	133	136	141.0	139	140	143	148.5	145	147	150	155.1	151	152	155	160.7	156	158	161	166.1	163	165	168	172.9

IDB: Entering Indoor Dry Bulb Temperature  
 High & low pressures are measured at the liquid & suction access fittings.  
 Shaded area reflects AHRI (TVA) conditions  
 kW = Total system power  
 Amps = outdoor unit amps (comp. + fans)





IDB	AIRFLOW	OUTDOOR AMBIENT TEMPERATURE												ENTERING INDOOR WET BULB TEMPERATURE											
		65°F				75°F				85°F				95°F				105°F				115°F			
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71
80	MBh	40.4	40.9	42.1	44.0	40.0	40.6	41.8	43.6	39.0	39.5	40.7	42.6	37.2	37.8	38.9	40.8	35.0	35.6	36.8	38.6	33.0	33.6	34.8	36.6
	S/T	1.00	0.83	0.70	0.6	1.00	0.84	0.70	0.6	1.00	0.87	0.73	0.6	1.00	1.00	0.75	0.6	1.00	1.00	0.77	0.6	1.00	1.00	0.82	0.7
	ΔT	25.95	24.21	20.95	17.6	25.91	24.16	20.90	17.5	26.15	24.41	21.15	17.8	25.89	24.14	20.88	17.5	25.66	23.91	20.65	17.3	26.75	25.00	21.74	18.4
	kW	2.34	2.34	2.33	2.4	2.62	2.61	2.61	2.6	2.92	2.92	2.92	2.9	3.26	3.26	3.25	3.3	3.63	3.63	3.63	3.6	4.07	4.07	4.07	4.1
	Amps	8.36	8.35	8.33	8.4	9.56	9.56	9.53	9.6	10.91	10.90	10.88	11.0	12.37	12.36	12.34	12.4	14.00	13.99	13.97	14.1	15.91	15.90	15.88	16.0
	Hi PR	271	272	274	278.6	313	314	316	321.0	358	359	361	365.4	406	407	409	413.3	457	458	460	464.8	512	513	515	519.9
	Lo PR	128	130	133	138.5	136	138	141	146.2	143	144	148	153.0	149	150	153	158.7	154	156	159	164.3	161	163	166	171.3
	MBh	40.6	41.2	42.4	44.2	40.3	40.8	42.0	43.8	39.2	39.8	41.0	42.8	37.4	38.0	39.2	41.0	35.2	35.8	37.0	38.8	33.2	33.8	35.0	36.8
	S/T	1.00	0.86	0.72	0.6	1.00	0.86	0.73	0.6	1.00	0.89	0.75	0.6	1.00	1.00	0.77	0.6	1.00	1.00	0.79	0.6	1.00	1.00	0.85	0.7
	ΔT	25.52	23.78	20.52	17.1	25.48	23.73	20.47	17.1	25.72	23.98	20.72	17.3	25.46	23.71	20.45	17.1	25.22	23.48	20.22	16.8	26.32	24.57	21.31	17.9
kW	2.34	2.34	2.34	2.4	2.62	2.62	2.61	2.6	2.93	2.93	2.92	2.9	3.27	3.26	3.26	3.3	3.64	3.64	3.63	3.7	4.08	4.08	4.07	4.1	
Amps	8.38	8.37	8.35	8.4	9.59	9.58	9.56	9.7	10.94	10.93	10.91	11.0	12.39	12.39	12.36	12.5	14.02	14.01	13.99	14.1	15.93	15.92	15.90	16.0	
Hi PR	272	273	275	279.5	314	315	317	322.0	359	360	362	366.4	406	408	410	414.2	458	459	461	465.8	513	514	516	520.9	
Lo PR	129	131	134	139.4	137	138	142	147.1	144	145	148	153.8	149	151	154	159.5	155	157	160	165.1	162	164	167	172.1	
MBh	41.8	42.4	43.5	45.4	41.4	42.0	43.2	45.0	40.4	41.0	42.1	44.0	38.6	39.2	40.4	42.2	36.4	37.0	38.2	40.0	34.4	35.0	36.2	38.0	
S/T	1.00	0.90	0.76	0.6	1.00	0.91	0.77	0.6	1.00	1.00	0.80	0.7	1.00	1.00	0.82	0.7	1.00	1.00	0.84	0.7	1.00	1.00	1.00	0.7	
ΔT	24.05	22.31	19.05	15.7	24.01	22.26	19.00	15.6	24.25	22.51	19.25	15.9	23.99	22.24	18.98	15.6	23.76	22.01	18.75	15.4	24.85	23.10	19.84	16.5	
kW	2.36	2.36	2.36	2.4	2.64	2.64	2.63	2.7	2.95	2.95	2.94	3.0	3.29	3.28	3.28	3.3	3.66	3.66	3.65	3.7	4.10	4.10	4.09	4.1	
Amps	8.47	8.46	8.44	8.5	9.68	9.67	9.65	9.7	11.02	11.01	10.99	11.1	12.48	12.47	12.45	12.5	14.11	14.10	14.08	14.2	16.02	16.01	15.99	16.1	
Hi PR	276	277	279	283.4	318	319	321	325.8	363	364	366	370.3	410	412	413	418.1	462	463	465	469.7	517	518	520	524.7	
Lo PR	133	134	138	143.1	141	142	145	150.8	147	149	152	157.6	153	155	158	163.3	159	160	163	168.9	166	167	170	175.9	

85	MBh	41.1	41.6	42.8	44.6	40.7	41.3	42.5	44.3	39.7	40.2	41.4	43.2	37.9	38.4	39.6	41.4	35.7	36.2	37.4	39.2	33.7	34.2	35.4	37.3
	S/T	1.00	0.94	0.80	0.7	1.00	1.00	0.81	0.7	1.00	1.00	0.83	0.7	1.00	1.00	0.85	0.7	1.00	1.00	1.00	0.7	1.00	1.00	1.00	0.8
	ΔT	29.38	27.64	24.38	21.0	29.33	27.59	24.33	21.0	29.58	27.83	24.57	21.2	29.32	27.57	24.31	20.9	29.08	27.34	24.08	20.7	30.18	28.43	25.17	21.8
	kW	2.34	2.34	2.34	2.4	2.62	2.62	2.61	2.6	2.93	2.93	2.92	2.9	3.27	3.26	3.26	3.3	3.64	3.64	3.63	3.7	4.08	4.08	4.07	4.1
	Amps	8.38	8.37	8.35	8.4	9.59	9.58	9.56	9.6	10.93	10.93	10.90	11.0	12.39	12.38	12.36	12.5	14.02	14.01	13.99	14.1	15.93	15.92	15.90	16.0
	Hi PR	272	273	275	279.8	315	316	318	322.2	359	360	362	366.7	407	408	410	414.5	458	460	461	466.1	513	515	516	521.2
	Lo PR	130	132	135	140.4	138	140	143	148.1	145	146	149	154.9	150	152	155	160.6	156	158	161	166.2	163	165	168	173.2
	MBh	41.3	41.9	43.0	44.9	40.9	41.5	42.7	44.5	39.9	40.5	41.6	43.5	38.1	38.7	39.9	41.7	35.9	36.5	37.7	39.5	33.9	34.5	35.7	37.5
	S/T	1.00	0.96	0.82	0.7	1.00	1.00	0.83	0.7	1.00	1.00	0.85	0.7	1.00	1.00	0.87	0.7	1.00	1.00	1.00	0.8	1.00	1.00	1.00	0.8
	ΔT	28.95	27.21	23.95	20.6	28.90	27.16	23.90	20.5	29.15	27.40	24.14	20.8	28.89	27.14	23.88	20.5	28.65	26.91	23.65	20.3	29.74	28.00	24.74	21.4
kW	2.35	2.35	2.34	2.4	2.63	2.62	2.62	2.6	2.94	2.93	2.93	3.0	3.27	3.27	3.26	3.3	3.65	3.64	3.64	3.7	4.09	4.08	4.08	4.1	
Amps	8.41	8.40	8.38	8.5	9.61	9.60	9.58	9.7	10.96	10.95	10.93	11.0	12.42	12.41	12.39	12.5	14.05	14.04	14.02	14.1	15.96	15.95	15.93	16.0	
Hi PR	273	274	276	280.8	315	317	319	323.2	360	361	363	367.7	408	409	411	415.5	459	461	462	467.1	514	516	517	522.1	
Lo PR	131	133	136	141.2	139	140	144	149.0	146	147	150	155.7	151	153	156	161.4	157	158	162	167.0	164	165	169	174.0	
MBh	42.5	43.0	44.2	46.0	42.1	42.7	43.9	45.7	41.1	41.6	42.8	44.6	39.3	39.8	41.0	42.8	37.1	37.6	38.8	40.7	35.1	35.6	36.8	38.7	
S/T	1.00	1.00	0.87	0.7	1.00	1.00	0.87	0.7	1.00	1.00	0.90	0.8	1.00	1.00	1.00	0.8	1.00	1.00	1.00	0.8	1.00	1.00	1.00	0.8	
ΔT	27.48	25.74	22.48	19.1	27.43	25.69	22.43	19.1	27.68	25.93	22.67	19.3	27.42	25.67	22.41	19.0	27.18	25.44	22.18	18.8	28.28	26.53	23.27	19.9	
kW	2.37	2.37	2.36	2.4	2.65	2.64	2.64	2.7	2.96	2.95	2.95	3.0	3.29	3.29	3.28	3.3	3.67	3.66	3.66	3.7	4.11	4.10	4.10	4.1	
Amps	8.49	8.48	8.46	8.6	9.70	9.69	9.67	9.8	11.05	11.04	11.02	11.1	12.50	12.50	12.47	12.6	14.13	14.12	14.10	14.2	16.04	16.03	16.01	16.1	
Hi PR	277	278	280	284.7	319	321	322	327.1	364	365	367	371.5	412	413	415	419.4	463	464	466	470.9	518	519	521	526.0	
Lo PR	135	136	140	145.0	143	144	147	152.7	149	151	154	159.5	155	157	160	165.2	161	162	165	170.8	168	169	172	177.8	

IDB: Entering Indoor Dry Bulb Temperature  
 High & low pressures are measured at the liquid & suction access fittings.  
 Shaded area reflects AHRI (TVA) conditions  
 kW = Total system power  
 Amps = outdoor unit amps (comp. + fans)

EXPANDED HEATING DATA

APHM32441\*

	OUTDOOR AMBIENT TEMPERATURE																
	65	60	55	50	47	45	40	35	30	25	20	17	15	10	5	0	-5
MBh	29.64	27.72	25.84	23.99	22.80	21.92	19.69	17.64	15.96	14.72	13.79	13.30	12.67	11.08	9.50	7.92	6.33
T/R	31.05	29.32	27.60	25.87	24.84	23.88	21.45	19.22	17.39	16.03	15.03	14.49	13.80	12.07	10.35	8.62	6.90
KW	2.07	2.04	2.02	1.99	1.98	1.97	1.94	1.91	1.89	1.86	1.84	1.82	1.81	1.79	1.76	1.73	1.71
AMPS	7.65	7.54	7.43	7.31	7.25	7.20	7.09	6.98	6.86	6.75	6.64	6.57	6.53	6.41	6.30	6.19	6.07
COP	4.20	3.97	3.75	3.53	3.38	3.27	2.97	2.70	2.48	2.32	2.20	2.14	2.05	1.82	1.58	1.34	1.09
Hi PR	429.26	415.30	401.34	387.38	379.00	373.42	359.45	345.49	331.53	317.57	303.60	295.23	289.64	275.68	261.72	247.75	233.79
LO PR	192.65	180.66	168.68	156.69	149.50	144.71	132.72	120.73	108.75	96.76	84.78	77.59	72.79	60.81	48.82	36.83	24.85

APHM33041\*

	OUTDOOR AMBIENT TEMPERATURE																
	65	60	55	50	47	45	40	35	30	25	20	17	15	10	5	0	-5
MBh	36.63	34.10	31.61	29.16	27.60	26.40	23.40	20.69	18.48	16.82	15.57	14.90	14.05	11.94	9.82	7.70	5.59
T/R	31.06	29.19	27.33	25.46	24.34	23.28	20.64	18.25	16.30	14.84	13.73	13.14	12.39	10.53	8.66	6.79	4.93
kW	2.60	2.55	2.49	2.43	2.39	2.37	2.31	2.25	2.19	2.13	2.08	2.04	2.02	1.96	1.90	1.84	1.78
Amps	9.66	9.40	9.15	8.89	8.74	8.64	8.38	8.13	7.87	7.61	7.36	7.21	7.10	6.85	6.59	6.34	6.08
COP	4.12	3.92	3.72	3.52	3.38	3.26	2.97	2.69	2.47	2.31	2.20	2.14	2.04	1.79	1.52	1.23	0.92
HI PR	437.08	422.86	408.65	394.43	385.90	380.21	366.00	351.78	337.56	323.35	309.13	300.60	294.91	280.70	266.48	252.26	238.05
LO PR	194.07	181.99	169.92	157.84	150.60	145.77	133.70	121.62	109.55	97.47	85.40	78.16	73.33	61.25	49.18	37.10	25.03

APHM33641\*

	OUTDOOR AMBIENT TEMPERATURE																
	65	60	55	50	47	45	40	35	30	25	20	17	15	10	5	0	-5
MBh	41.85	39.15	36.49	33.88	32.20	30.96	27.82	24.92	22.55	20.80	19.50	18.80	17.91	15.67	13.44	11.21	8.97
T/R	31.05	29.33	27.60	25.88	24.85	23.89	21.47	19.23	17.40	16.05	15.04	14.51	13.82	12.09	10.37	8.65	6.92
kW	2.92	2.89	2.85	2.81	2.79	2.78	2.74	2.71	2.67	2.63	2.60	2.57	2.56	2.52	2.49	2.45	2.42
Amps	10.80	10.64	10.49	10.33	10.24	10.17	10.01	9.86	9.70	9.54	9.38	9.29	9.23	9.07	8.91	8.75	8.60
COP	4.20	3.98	3.75	3.53	3.38	3.27	2.97	2.70	2.48	2.32	2.20	2.14	2.05	1.82	1.58	1.34	1.09
HI PR	458.49	443.57	428.66	413.75	404.80	398.83	383.92	369.01	354.10	339.18	324.27	315.32	309.36	294.44	279.53	264.62	249.71
LO PR	192.78	180.78	168.79	156.80	149.60	144.80	132.81	120.81	108.82	96.83	84.83	77.64	72.84	60.85	48.85	36.86	24.86

APHM34241\*

	OUTDOOR AMBIENT TEMPERATURE																
	65	60	55	50	47	45	40	35	30	25	20	17	15	10	5	0	-5
MBh	48.30	45.19	42.13	39.13	37.20	35.78	32.17	28.84	26.11	24.09	22.60	21.80	20.77	18.21	15.64	13.07	10.51
T/R	33.08	31.25	29.42	27.59	26.50	25.49	22.91	20.54	18.60	17.16	16.10	15.53	14.80	12.97	11.14	9.31	7.48
kW	3.37	3.33	3.29	3.25	3.23	3.21	3.17	3.13	3.09	3.05	3.01	2.99	2.97	2.93	2.89	2.85	2.81
Amps	12.59	12.41	12.24	12.07	11.96	11.89	11.72	11.54	11.37	11.20	11.02	10.92	10.85	10.67	10.50	10.33	10.15
COP	4.20	3.98	3.75	3.53	3.38	3.27	2.97	2.70	2.48	2.32	2.20	2.14	2.05	1.82	1.59	1.34	1.10
HI PR	444.55	430.10	415.64	401.18	392.50	386.72	372.26	357.80	343.34	328.88	314.42	305.74	299.96	285.50	271.04	256.58	242.12
LO PR	195.87	183.68	171.50	159.31	152.00	147.13	134.94	122.75	110.57	98.38	86.19	78.88	74.01	61.82	49.64	37.45	25.26

APHM34841\*

	OUTDOOR AMBIENT TEMPERATURE																
	65	60	55	50	47	45	40	35	30	25	20	17	15	10	5	0	-5
MBh	55.66	52.26	48.91	45.62	43.50	41.96	38.09	34.44	31.45	29.25	27.66	26.80	25.69	22.90	20.12	17.34	14.55
T/R	30.97	29.36	27.75	26.14	25.18	24.30	22.05	19.93	18.20	16.93	16.01	15.51	14.86	13.25	11.64	10.03	8.42
kW	3.83	3.82	3.80	3.78	3.77	3.77	3.75	3.73	3.71	3.70	3.68	3.67	3.66	3.65	3.63	3.61	3.60
Amps	14.13	14.05	13.98	13.90	13.86	13.83	13.76	13.68	13.61	13.54	13.46	13.42	13.39	13.32	13.24	13.17	13.10
COP	4.26	4.01	3.77	3.54	3.38	3.27	2.98	2.71	2.48	2.32	2.20	2.14	2.05	1.84	1.62	1.41	1.19
HI PR	452.14	437.44	422.73	408.02	399.20	393.32	378.61	363.90	349.20	334.49	319.78	310.96	305.08	290.37	275.67	260.96	246.25
LO PR	194.20	182.11	170.03	157.95	150.70	145.87	133.79	121.70	109.62	97.54	85.46	78.21	73.38	61.29	49.21	37.13	25.05

APHM36041\*

HIGH STAGE

	OUTDOOR AMBIENT TEMPERATURE																
	65	60	55	50	47	45	40	35	30	25	20	17	15	10	5	0	-5
MBh	72.39	67.44	62.98	57.89	54.50	49.05	36.64	26.32	18.07	11.48	6.02	3.10	-0.33	-8.89	-17.46	-26.03	-34.59
T/R	36.23	33.75	31.52	28.97	27.28	24.55	18.34	13.17	9.05	5.75	3.01	1.55	-0.16	-4.45	-8.74	-13.03	-17.32
kW	7.31	6.59	5.87	5.16	4.73	4.44	3.72	3.01	2.29	1.57	0.85	0.42	0.14	-0.58	-1.30	-2.01	-2.73
Amps	28.83	25.71	22.60	19.48	17.61	16.36	13.25	10.13	7.01	3.90	0.78	-1.09	-2.34	-5.45	-8.57	-11.69	-14.80
COP	2.90	3.00	3.14	3.29	3.38	3.24	2.89	2.57	2.31	2.14	2.06	2.14	-0.69	4.50	3.95	3.79	3.71
HI PR	485.33	469.54	453.76	437.97	428.50	422.19	406.40	390.61	374.83	359.04	343.26	333.78	327.47	311.68	295.90	280.11	264.33
LO PR	190.33	178.49	166.65	154.80	147.70	142.96	131.12	119.28	107.44	95.60	83.76	76.65	71.91	60.07	48.23	36.39	24.55

APHM36041\*

LOW STAGE

	OUTDOOR AMBIENT TEMPERATURE																
	65	60	55	50	47	45	40	35	30	25	20	17	15	10	5	0	-5
MBh	52.22	48.65	45.43	41.76	39.32	35.35	26.34	18.85	12.86	8.07	4.10	1.98	-0.51	-6.73	-12.96	-19.18	-25.40
T/R	35.42	33.00	30.82	28.33	26.67	23.98	17.87	12.78	8.72	5.48	2.78	1.34	-0.35	-4.57	-8.79	-13.01	-17.23
kW	4.24	3.82	3.40	2.98	2.73	2.56	2.14	1.72	1.31	0.89	0.47	0.22	0.05	-0.37	-0.79	-1.21	-1.63
Amps	16.26	14.44	12.62	10.80	9.70	8.98	7.15	5.33	3.51	1.69	-0.13	-1.22	-1.95	-3.77	-5.59	-7.42	-9.24
COP	3.61	3.73	3.92	4.11	4.22	4.04	3.60	3.20	2.89	2.67	2.57	2.68	-3.03	5.34	4.82	4.66	4.58
HI PR	470.35	455.05	439.75	424.45	415.27	409.15	393.86	378.56	363.26	347.96	332.66	323.48	317.36	302.06	286.76	271.47	256.17
LO PR	186.98	175.35	163.72	152.08	145.10	140.45	128.82	117.18	105.55	93.92	82.28	75.30	70.65	59.02	47.38	35.75	24.12

Calculations are based on nominal CFM and 70 °F indoor dry bulb.

Amps = Outdoor unit amps (comp.+fan)

Note: Shaded area is AHRI Rating Conditions at 47°F outdoor ambient temperature.

kW = Total system power

APHM32441\*

POSITION	MOTOR SPEED	VOLTS		STATIC							
				0.1	0.2	0.3	0.4	0.5	0.6	0.7	0.8
Horizontal Position	T1	230	CFM Watts	847 76	792 84	728 94	638 102	- -	- -	- -	- -
	T2/T3	230	CFM Watts	1114 138	1068 147	1017 155	964 164	901 173	829 181	751 188	667 194
	T4/T5	230	CFM Watts	1371 235	1316 243	1281 252	1240 261	1186 266	1133 275	1072 284	1000 293
Downshot Position	T1	230	CFM Watts	828 75	767 85	680 95	574 104	- -	- -	- -	- -
	T2/T3	230	CFM Watts	1085 136	1019 144	960 152	888 162	913 173	713 180	657 185	601 191
	T4/T5	230	CFM Watts	1355 244	1300 253	1254 260	1201 268	1147 276	1084 285	1007 294	899 303

APHM33041\*

POSITION	MOTOR SPEED	VOLTS		STATIC							
				0.1	0.2	0.3	0.4	0.5	0.6	0.7	0.8
Horizontal Position	T1	230	CFM Watts	877 84	821 92	758 99	974 110	596 118	531 125	481 130	- -
	T2/T3	230	CFM Watts	1347 228	1295 236	1243 245	1190 252	1134 259	1079 266	1010 275	938 283
	T4/T5	230	CFM Watts	1463 284	1419 294	1376 302	1329 309	1282 317	1235 325	1183 333	1126 340
Downshot Position	T1	230	CFM Watts	859 83	797 92	719 101	619 111	552 118	497 122	437 127	- -
	T2/T3	230	CFM Watts	1302 220	1257 228	1198 238	1148 246	1089 254	1023 263	936 273	844 282
	T4/T5	230	CFM Watts	1439 288	1396 297	1341 305	1294 313	1246 322	1185 330	1119 339	1047 347

APHM33641\*

POSITION	MOTOR SPEED	VOLTS		STATIC							
				0.1	0.2	0.3	0.4	0.5	0.6	0.7	0.8
Horizontal Position	T1	230	CFM Watts	850 76	795 85	726 93	640 103	559 110	- -	- -	- -
	T2/T3	230	CFM Watts	1438 271	1393 280	1354 291	1304 296	1258 305	1209 312	1154 320	1089 329
	T4/T5	230	CFM Watts	1604 396	1560 402	1507 408	1468 424	1415 426	1364 433	1321 444	1276 454
Downshot Position	T1	230	CFM Watts	825 77	762 87	686 97	577 105	523 111	- -	- -	- -
	T2/T3	230	CFM Watts	1436 281	1389 290	1338 298	1289 307	1241 315	1186 325	1122 334	1053 343
	T4/T5	230	CFM Watts	1595 382	1555 391	1506 399	1462 408	1415 418	1370 426	1319 435	1260 444

APHM34241\*

POSITION	MOTOR SPEED	VOLTS		STATIC							
				0.1	0.2	0.3	0.4	0.5	0.6	0.7	0.8
Horizontal Position	T1	230	CFM	1003	937	887	837	773	699	634	574
			Watts	100	106	116	129	142	154	162	171
	T2/T3	230	CFM	1534	1492	1453	1410	1372	1330	1287	1236
Downshot Position	T1	230	CFM	981	918	850	761	687	613	553	488
			Watts	100	113	126	138	153	161	171	179
	T2/T3	230	CFM	1490	1433	1371	1318	1260	1197	1121	1023
	T4/T5	230	Watts	258	273	285	297	309	323	335	347
	T4/T5	230	CFM	1786	1728	1678	1629	1577	1517	1453	1385

APHM34841\*

POSITION	MOTOR SPEED	VOLTS		STATIC							
				0.1	0.2	0.3	0.4	0.5	0.6	0.7	0.8
Horizontal Position	T1	230	CFM	1177	1123	1077	1031	972	-	-	-
			Watts	142	151	162	173	185	-	-	-
	T2/T3	230	CFM	1825	1785	1748	1713	1674	1610	1609	1544
Downshot Position	T1	230	CFM	1984	1947	1975	1864	1823	1781	1741	1694
			Watts	567	578	590	596	603	610	618	623
	T2/T3	230	CFM	1168	1101	1045	979	913	-	-	-
	T2/T3	230	Watts	144	155	168	182	197	-	-	-
			CFM	1829	1771	1720	1670	1613	1556	1493	1426
	T4/T5	230	Watts	440	452	465	478/	486	494	501	510
	T4/T5	230	CFM	2004	1949	1892	1837	1782	1728	1674	1616
			Watts	564	577	587	594	603	612	620	628

APHM36041\*

POSITION	MOTOR SPEED	VOLTS		STATIC							
				0.1	0.2	0.3	0.4	0.5	0.6	0.7	0.8
Horizontal Position	T1	230	CFM	1488	1448	1410	1371	1336	1293	1254	1204
			Watts	270	279	290	305	318	330	343	356
	T2/T3	230	CFM	2029	1991	1956	1920	1876	1829	1801	1766
Downshot Position	T1	230	CFM	2199	2161	2126	2090	2056	2018	1982	1949
			Watts	801	809	817	828	838	851	858	873
	T2/T3	230	CFM	1399	1361	1326	1289	1256	1215	1179	1132
	T2/T3	230	Watts	277	286	298	312	326	338	351	365
			CFM	1907	1872	1839	1804	1763	1719	1692	1660
	T4/T5	230	Watts	632	638	646	654	664	672	688	699
	T4/T5	230	CFM	2067	2031	1999	1964	1932	1897	1863	1832
			Watts	821	829	838	849	859	872	880	895

Notes:

1. Data shown is dry coil. Wet coil pressure drop is approximately 0.2" H<sub>2</sub>O, for three-row indoor coil; and 0.3" H<sub>2</sub>O, for four-row indoor coil.
2. Data shown does not include filter pressure drop, approx. 0.08" H<sub>2</sub>O.
3. Reduce airflow by 2% for 208V operation.
4. ALL MODELS SHOULD RUN NO LESS THAN 300 CFM/TON.
5. For high static applications, see blower performance table for selecting appropriate speed tap.

**HEAT KIT ELECTRICAL DATA (BLOWER ONLY, HEAT MODE)**

MODEL AND HEAT KIT USAGE	CIRCUIT #1		CIRCUIT #2		SINGLE-POINT KIT		ACTUAL kW / BTU@ 240V
	MCA <sup>1</sup>	MOP <sup>2</sup>	MCA <sup>1</sup>	MOP <sup>2</sup>	MCA <sup>1</sup>	MOP <sup>2</sup>	
<b>APHM32441*</b>	4.3	---	---	---	--	--	---
HKP-05C*	21 / 25	25 / 25	---	---	46.3	50	4.75 / 16,200
HKR-08C*	32 / 36	35 / 40	---	---	58.1	60	7.0 / 23,800
HKP-10C*	43 / 49	45 / 50	---	---	71.1	80	9.5 / 32,400
<b>APHM33041*</b>	4.3	---	---	---	--	--	---
HKP-05C*	21 / 25	25 / 25	---	---	48	50	4.75 / 16,200
HKR-08C*	32 / 36	35 / 40	---	---	59.7	60	7.0 / 23,800
HKP-10C*	43 / 49	45 / 50	---	---	72.7	80	9.5 / 32,400
HKP-15C*	43 / 49	45 / 50	21 / 25	25 / 25	97.4	100	14.25 / 48,600
<b>APHM33641*</b>	4.3	---	---	---	--	--	---
HKP-05C*	21 / 25	25 / 25	---	---	51	60	4.75 / 16,200
HKR-08C*	32 / 36	35 / 40	---	---	63	70	7.0 / 23,800
HKP-10C*	43 / 49	45 / 50	---	---	76	80	9.5 / 32,400
HKP-15C*	43 / 49	45 / 50	21 / 25	25 / 25	101	110	14.25 / 48,600
<b>APHM34241*</b>	5.8	---	---	---	--	--	---
HKP-05C*	21 / 25	25 / 25	---	---	54	60	4.75 / 16,200
HKR-08C*	32 / 36	35 / 40	---	---	66	70	7.0 / 23,800
HKP-10C*	43 / 49	45 / 50	---	---	79	80	9.5 / 32,400
HKP-15C*	43 / 49	45 / 50	21 / 25	25 / 25	104	110	14.25 / 48,600
<b>APHM34841*</b>	5.8	---	---	---	--	--	---
HKP-05C*	21 / 25	25 / 25	---	---	59	70	4.75 / 16,200
HKR-08C*	32 / 36	35 / 40	---	---	71	80	7.0 / 23,800
HKP-10C*	43 / 49	45 / 50	---	---	84	90	9.5 / 32,400
HKP-15C*	43 / 49	45 / 50	21 / 25	25 / 25	109	110	14.25 / 48,600
HKP-20C	43 / 49	45 / 50	43 / 49	45 / 50	133	150	19.0 / 64,800
<b>APHM36041*</b>	7.6	---	---	---	--	--	---
HKP-05C*	21 / 25	25 / 25	---	---	69	90	4.75 / 16,200
HKR-08C*	32 / 36	35 / 40	---	---	80	100	7.0 / 23,800
HKP-10C*	43 / 49	45 / 50	---	---	94	110	9.5 / 32,400
HKP-15C*	43 / 49	45 / 50	21 / 25	25 / 25	118	125	14.25 / 48,600

**Heating kW Correction Factor**

Supply Voltage	240	230	220	210	208
Correction Factor	1.0	0.93	0.85	0.78	0.76

Multiply rated kW by correction factor to get actual kW


<sup>1</sup> Minimum Circuit Ampacity @ 208 / 240 V

<sup>2</sup> Maximum Overcurrent Protection Device @ 208 / 240 V


\* Revision level that may or may not be designated

C Circuit breaker option


**NOTE:** HKP-15C\* and HKP-20C\* replace HKR-15C and HKR-20C respectively to meet new UL1995 requirements.

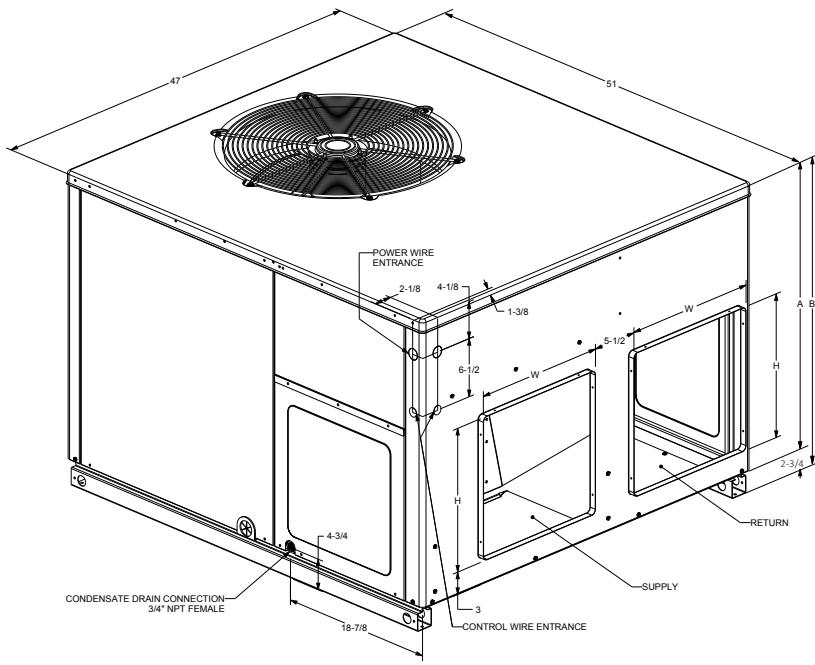

MODEL	UNIT DIMENSIONS (INCHES)				CHASSIS SIZE
			HEIGHT		
	W	D	A	B	
APHM32441**	47	51	32	34 3/4	Medium
APHM33041**	47	51	32	34 3/4	Medium
APHM33641**	47	51	32	34 3/4	Medium
APHM34241**	47	51	40	42 3/4	Large
APHM34841**	47	51	40	42 3/4	Large
APHM36041**	47	51	40	42 3/4	Large

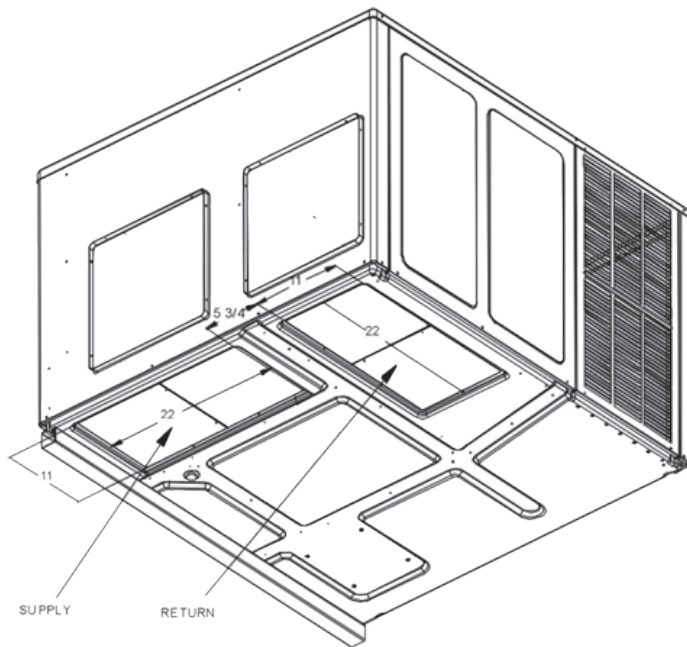

MODEL	DUCT OPENINGS			
	SUPPLY		RETURN	
	W	H	W	H
APHM32441**	16	16	16	16
APHM33041**	16	16	16	16
APHM33641**	16	16	16	16
APHM34241**	16	18	16	18
APHM34841**	16	18	16	18
APHM36041**	16	18	16	18

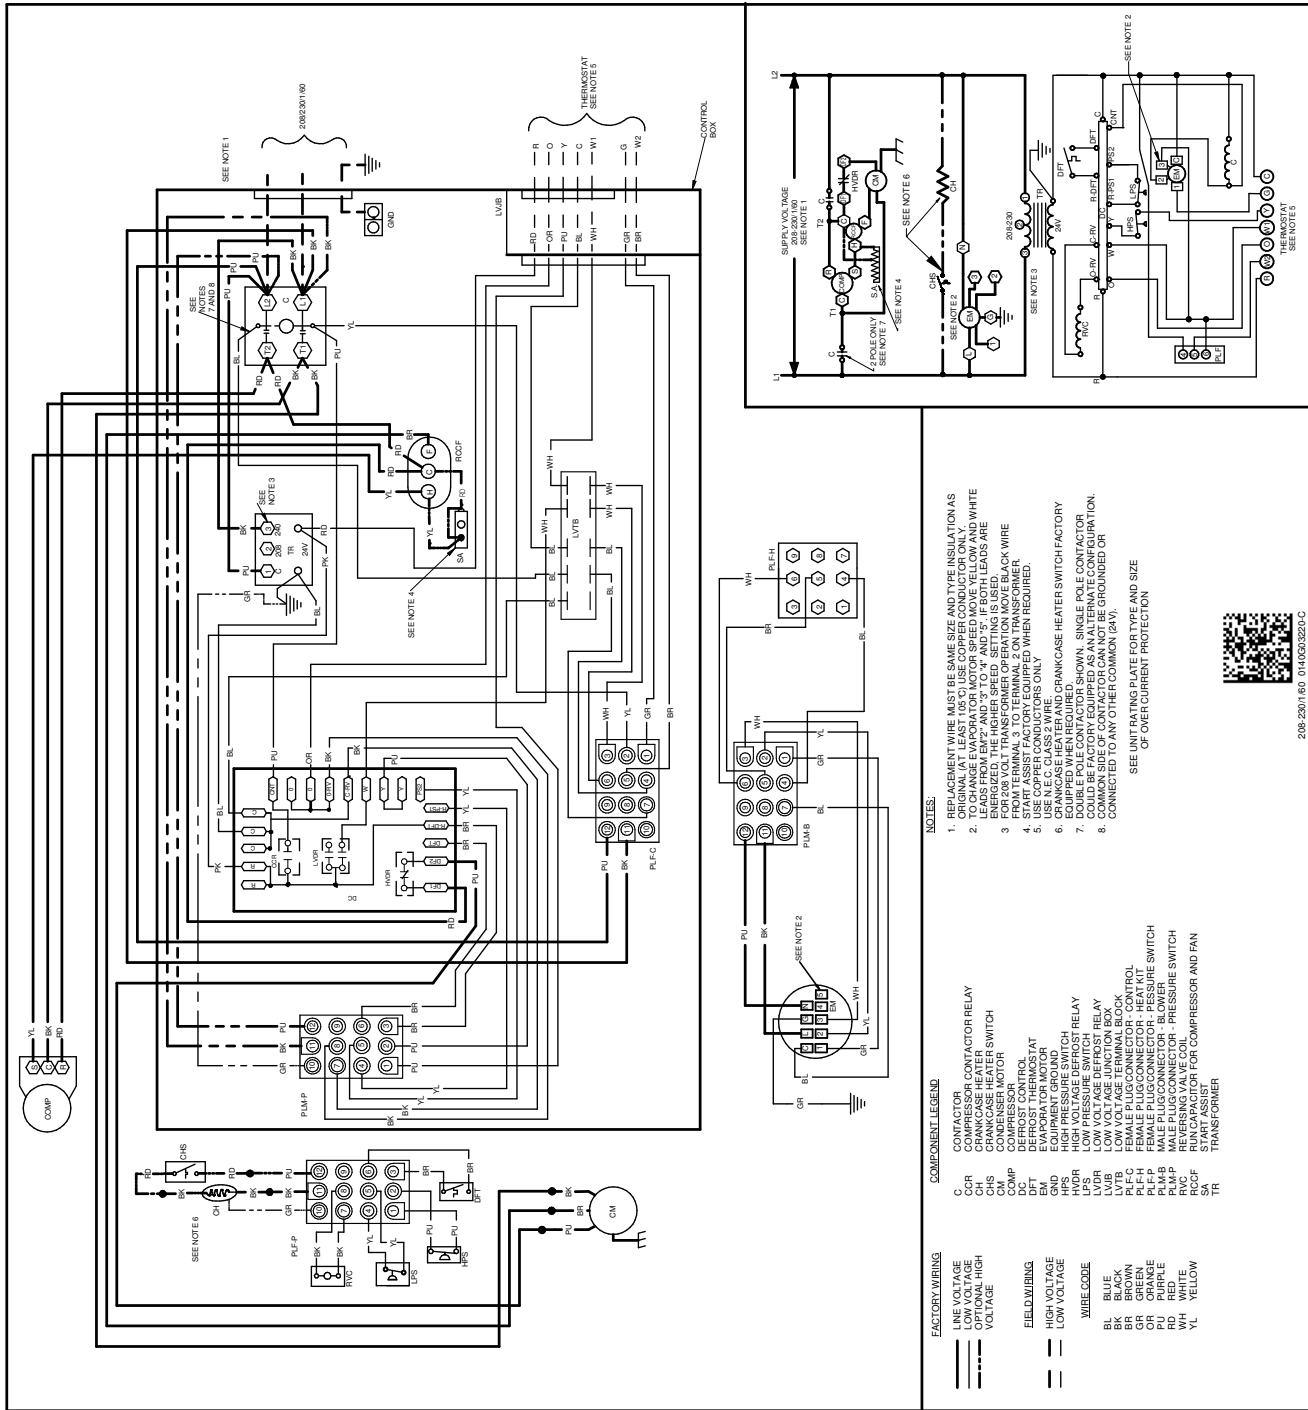

- NOTES:**
1. REPLACEMENT WIRE MUST BE SAME SIZE AND TYPE INSULATION AS ORIGINAL WIRE.
  2. TO CHANGE EVAPORATOR MOTOR SPEED MOVE YELLOW AND WHITE LEADS FROM EM2' AND '3' TO '4' AND '5', IF BOTH LEADS ARE FROM TERMINAL 3 TO TERMINAL 2 ON TRANSFORMER.
  3. FOR 208 VOLT TRANSFORMER OPERATION MOVE BLACK WIRE FROM TERMINAL 3 TO TERMINAL 2 ON TRANSFORMER.
  4. USE COPPER CONDUCTORS ONLY.
  5. USE N.E.C. CLASS 2 WIRE.
  6. EQUIPPED WHEN REQUIRED.
  7. DOUBLE POLE CONTACTOR SHOWN. SINGLE POLE CONTACTOR MAY BE USED FOR THIS APPLICATION.
  8. COMMON SIDE OF CONTACTOR CAN NOT BE GROUNDED OR CONNECTED TO ANY OTHER COMMON (RAV).
- SEE UNIT RATING PLATE FOR TYPE AND SIZE OF OVERCURRENT PROTECTION

**COMPONENT LEGEND**

C	CONTACTOR
CCR	COMPRESSOR CONTACTOR RELAY
CHS	CONDENSER HEATER SWITCH
CM	CRANKCASE HEATER SWITCH
COMP	COMPRESSOR
DFT	DEFROST CONTROL
DT	DEFROST THERMOSTAT
EG	EQUIPMENT GROUND
HPS	HIGH PRESSURE SWITCH RELAY
LPS	LOW PRESSURE SWITCH
LVR	LOW VOLTAGE DEFROST RELAY
LVS	LOW VOLTAGE SWITCH
LVB	LOW VOLTAGE TERMINAL BLOCK
PL-F	FEMALE PLUG CONNECTOR - CONTROL
PL-FH	FEMALE PLUG CONNECTOR - PRESSURE SWITCH
PL-M	MALE PLUG CONNECTOR - BLOWER
PL-MP	MALE PLUG CONNECTOR - PRESSURE SWITCH
RVC	REVERSING VALVE COIL
RCCF	RUNG CAPACITOR FOR COMPRESSOR AND FAN
TR	TRANSFORMER

**FACTORY WIRING**

---	LINE VOLTAGE
---	LOW VOLTAGE
---	HIGH VOLTAGE
---	WIRE COLOR
---	BL - BLUE
---	BR - BROWN
---	OR - ORANGE
---	PU - PURPLE
---	WH - WHITE
---	YL - YELLOW

**WARNING**



High Voltage: Disconnect all power before servicing or installing this unit. Multiple power sources may be present. Failure to do so may cause property damage, personal injury, or death.

Wiring is subject to change. Always refer to the wiring diagram on the unit for the most up-to-date wiring.



208-2297180 0140505225-C



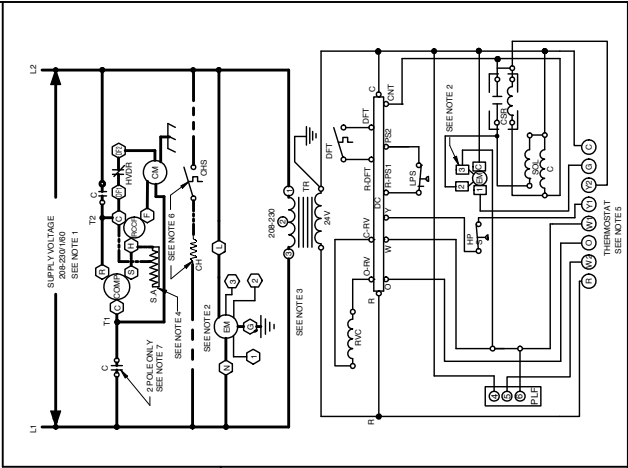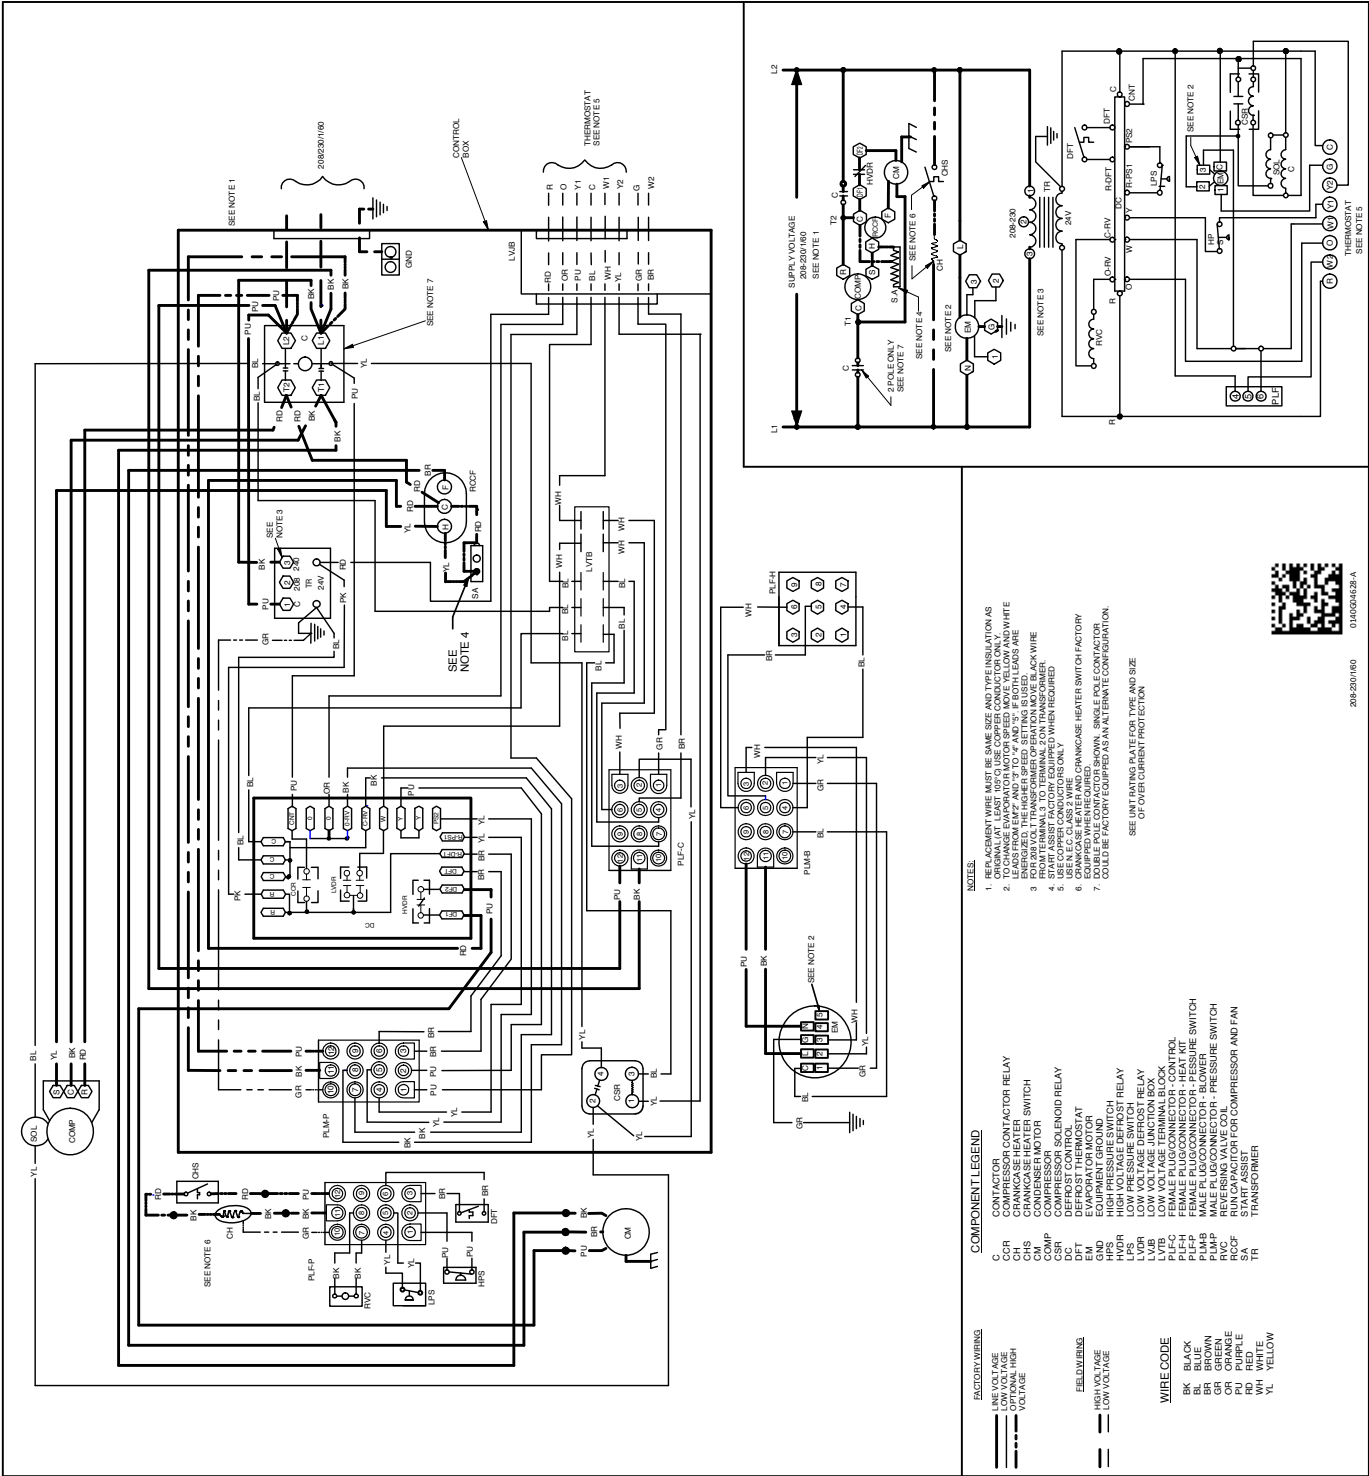

- NOTES:**
1. TERMINALS MUST BE WIRE SIZES AS INDICATED AS ORIGINAL. AT LEAST, WIRE SIZE COPPER CONDUCTOR ONLY.
  2. TO CHANGE EVAPORATOR MOTOR SPEED, MOVE YELLOW AND WHITE ENGRAVED THE HIGH SPEED SETTING BUSH FROM TERMINAL 3 TO TERMINAL 2 ON TRANSFORMER.
  3. USE COPPER CONDUCTOR ONLY WHEN REQUIRED.
  4. USE COPPER CONDUCTOR ONLY.
  5. USE COPPER CONDUCTOR ONLY.
  6. USE 1.5 GA. WIRE AND CHANCKASE HEATER SWITCH FACTORY EQUIPPED WHEN REQUIRED.
  7. COULD BE FACTORY EQUIPPED AS AN ALTERNATE CONFIGURATION.

- COMPONENT LEGEND**
- CCR COMPRESSOR CONTACTOR RELAY
  - CHS CHANCKASE HEATER SWITCH
  - CMR COMPRESSOR MOTOR
  - CSR COMPRESSOR SOLENOID RELAY
  - DFT DEFROST THERMOSTAT
  - EM EVAPORATOR MOTOR
  - HDR HIGH VOLTAGE DEFROST RELAY
  - LVR LOW VOLTAGE DEFROST RELAY
  - LVB LOW VOLTAGE DEFROST RELAY
  - PLE-C FEMALE PLUG CONNECTOR - CONTROL
  - PLF-H FEMALE PLUG CONNECTOR - HEAT KIT
  - PLM-B MALE PLUG CONNECTOR - BLOWER
  - PLM-P MALE PLUG CONNECTOR - PRESSURE SWITCH
  - RCFC RUN CAPACITOR FOR COMPRESSOR AND FAN
  - SA STARTER
  - TR TRANSFORMER

- FACTORY WIRING**
- LINE VOLTAGE
  - OPTIONAL WIRE
  - VOLTAGE
- FIELD WIRING**
- HIGH VOLTAGE
  - LOW VOLTAGE
- WIRE CODE**
- BK BLACK
  - BL BLUE
  - BR BROWN
  - GR GREEN
  - OR ORANGE
  - RD RED
  - SA SABLE
  - WH WHITE
  - YL YELLOW



61406040283A

209-2201660

Wiring is subject to change. Always refer to the wiring diagram or the unit for the most up-to-date wiring.



**WARNING**

**High Voltage:** Disconnect all power before servicing or installing this unit. Multiple power sources may be present. Failure to do so may cause property damage, personal injury, or death.

ACCESSORY DESCRIPTION	ITEM NUMBER	
	MEDIUM CHASSIS	LARGE CHASSIS
Concentric Kit	CDK36	CDK4872
Downflow Economizer	GPJMED102	GPJMED103
Downflow Internal Filter Rack	DDNIFRPCHMM	DDNIFRPCHML
Downflow Manual Damper	PGMDD101/102	PGMDD103
Downflow Motorized Damper	PGMDMD101/102	PGMDMD103
Downflow Square to Round	SQRPG101/102	SQRPG103
Economizer Wiring Harness (2-4 Ton)	0259G00215	0259G00215
Economizer Wiring Harness (5 Ton)	N/A	0259L00411
External Horizontal Filter Rack	DPHFRA	DPHFRA
Horizontal Duct Cover	20464501PDGK	20464502PDGK
Horizontal Economizer	DHZECNJPCHM	DHZECNJPCHL
Horizontal Manual Damper	PGMDH102	PGMDH103
Horizontal Motorized Damper	PGMDMH102	PGMDMH103
Horizontal Square to Round	SQRPGH101/102	SQRPGH103
Outdoor Thermostat Kit w/ Lockout Stat	OT18-60A	OT18-60A
Roof Curb	D14CRBPGCHMA	D14CRBPGCHMA

**SINGLE-POINT KIT ACCESSORY KITS**

Select the single-point kit accessory based on the unit model.

MODEL	SINGLE-POINT KIT
APHM32441**	SPK-30
APHM33041**	SPK-35
APHM33641**	SPK-35
APHM34241**	SPK-45
APHM34841**	SPK-50
APHM36041**	SPK-60