

DUAL-REFRIGERANT COILS

CAUF, CAPF, CHPF, AND CSCF

CASED, PAINTED UPFLOW/DOWNFLOW, UNCASED UPFLOW/ DOWNFLOW, HORIZONTAL "A", AND HORIZONTAL SLAB INDOOR COILS

Standard Features

- Suitable for use with R-410A and R-22 refrigerants
- Rust-resistant thermoplastic drain pans feature a low water-retention design
- Check flowrate expansion device for heat pump or cooling-only applications
- Rifled aluminum tubing and louvered aluminum fin coils
- AHRI Certified; ETL Listed

Cased Coil Cabinet Features

- Foil-face insulation
- Galvanized leather-grain finish
- Architectural Gray paint finish on C*PF cased coils
- Split-seam front for easy access
- 17½", 21", and 24½" CHPF coils have one 3½" adapter plate
- 17½", 21", and 24½" CAPF coils have two 1¾" adapter plates

Accessories

- Field-Installed Expansion Valve Kits
- Field-Installed High-Temperature Drain Pan Kits; maximum temperature rating is 400°F
- See full list of accessories on Page 2.



CAUF
Uncased



CAPF
Cased



CHPF
Horizontal "A"




CSCF
Horizontal Slab



* Complete warranty details available from your local dealer or at www.goodmanmfg.com. To receive the 10-Year Parts Limited Warranty, online registration must be completed within 60 days of installation. Online registration is not required in California or Québec.

Note: Do not use these coils on oil furnaces or any applications where the temperature on the drain pan may exceed 300°F. If these coils are applied with an oil furnace or another application where high temperatures threaten or jeopardize the durability of the drain pan, you must replace the factory-installed drain pan with a high-temperature drain pan. High-temperature drain pan kits are available as field-installed accessories.

NOMENCLATURE

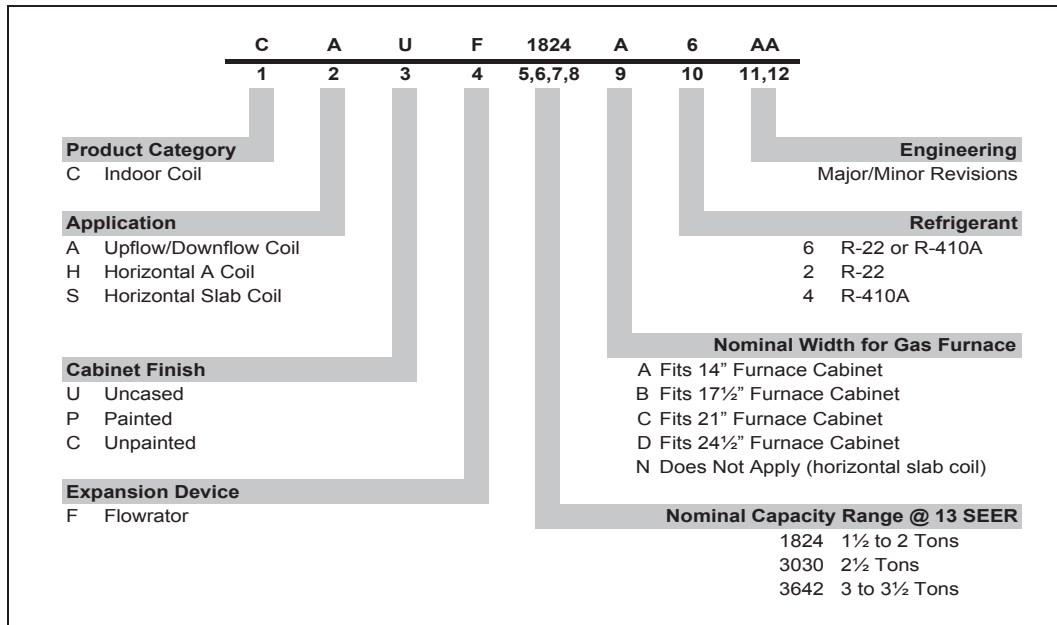

ACCESSORIES

EXPANSION VALVE KITS

KIT NUMBER	DESCRIPTION	APPLICATION	REFRIGERANT	TONNAGE: OUTDOOR UNIT
XVB18-36C	20% Bleed Valve	AC Only	R-22	1½ - 3 Ton
XVB42-60C	20% Bleed Valve	AC Only	R-22	3½ - 5 Ton
XV18-36C	Non-bleed Valve	AC Only	R-22	1½ - 3 Ton
XV42-60C	Non-bleed Valve	AC Only	R-22	3½ - 5 Ton
TX2N2	Non-bleed Valve	AC or HP	R-22	1½ - 2 Ton
TX3N2	Non-bleed Valve	AC or HP	R-22	2½ - 3 Ton
TX5N2	Non-bleed Valve	AC or HP	R-22	3½ - 5 Ton
TX2N4A	Non-bleed Valve	AC or HP	R-410A	1½ - 2 Ton
TX3N4	Non-bleed Valve	AC or HP	R-410A	2½ - 3 Ton
TX5N4	Non-bleed Valve	AC or HP	R-410A	3½ - 5 Ton

Note: Condensing units and heat pumps with reciprocating compressors require the use of start-assist components when used in conjunction with an indoor coil using a non-bleed thermal expansion valve refrigerant metering device.

HIGH-TEMP DRAIN PAN KITS

DRAIN PAN KITS	FURNACE SIZE
HTP-A	14" furnaces
HTP-B	17½" furnaces
HTP-C	21" furnaces
HTP-D	24½" furnaces

CAUF — UNCASSED UPFLOW/DOWNFLOW INDOOR COILS




SPECIFICATIONS

MODEL	DIMENSIONS			NOMINAL TONS	CONNECTION		SHIP WEIGHT (LBS)
	W	H	A		LIQUID	SUCTION	
CAUF1824A6	13"	16¼"	13"	1½-2	⅜"	¾"	17
CAUF1824B6	16½"	16⅝"	13"	1½-2	⅜"	¾"	20
CAUF1824C6	20"	16⅞"	17"	1½-2	⅜"	¾"	24
CAUF3030A6	13"	20⅞"	17"	2½	⅜"	¾"	20
CAUF3030B6	16½"	18¾"	17"	2½	⅜"	¾"	23
CAUF3030C6	20"	17⅞"	17"	2½	⅜"	¾"	27
CAUF3030D6	23"	17⅞"	17"	2½	⅜"	¾"	30
CAUF3131B6	16½"	20⅞"	17"	2½	⅜"	¾"	25
CAUF3131C6	20"	20"	17"	2½	⅜"	⅞"	28
CAUF3636A6	13"	19½"	17"	3	⅜"	⅞"	23
CAUF3636B6	16½"	19⅞"	17"	3	⅜"	⅞"	29
CAUF3636C6	20"	19⅞"	17"	3	⅜"	⅞"	33
CAUF3636D6	23"	19⅞"	17"	3	⅜"	⅞"	36
CAUF3642C6	20"	19"	17"	3-3½	⅜"	⅞"	28
CAUF3642D6	23"	19⅞"	17"	3-3½	⅜"	⅞"	29
CAUF3743C6	20"	28⅞"	25"	3-3½	⅜"	⅞"	40
CAUF3743D6	23"	27⅞"	25"	3-3½	⅜"	⅞"	42
CAUF4860C6	20"	28"	25"	4-5	⅜"	⅞"	41
CAUF4860D6	23"	28"	25"	4-5	⅜"	⅞"	44
CAUF4961C6	20"	28"	25"	4-5	⅜"	⅞"	46
CAUF4961D6	23"	27"	25"	4-5	⅜"	⅞"	50

Note: For a properly matched system, refer to specification sheet of the corresponding Goodman® outdoor unit.

DIMENSIONS

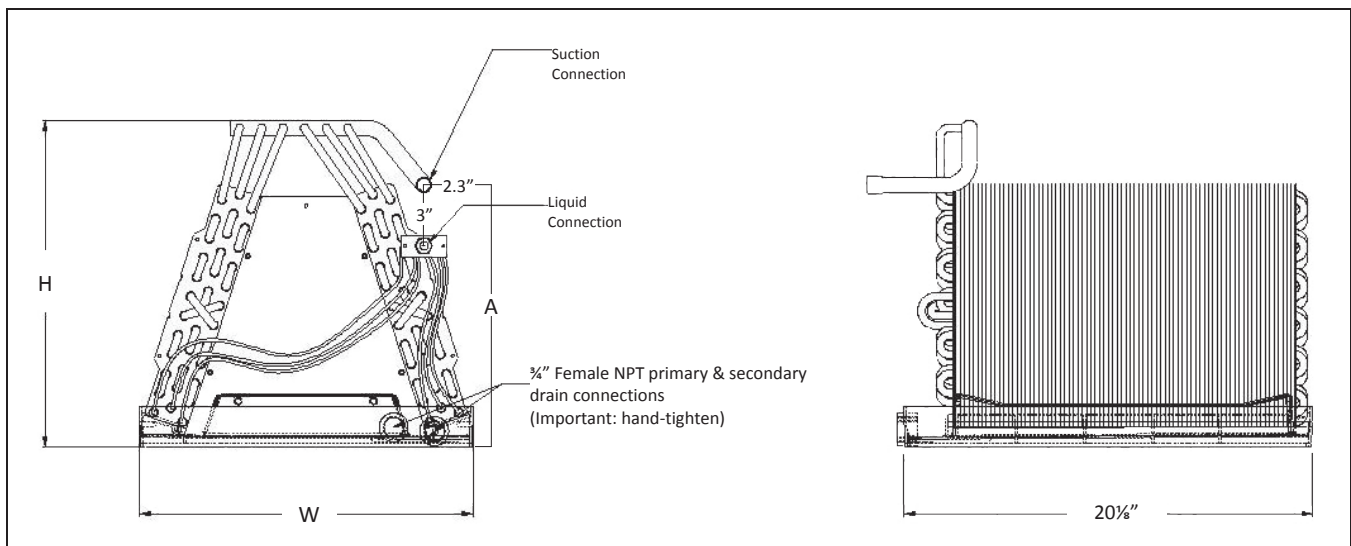


CAPF — CASED UPFLOW/DOWNFLOW INDOOR COILS



SPECIFICATIONS

MODEL	CABINET DIMENSIONS				PLENUM WIDTH	COIL DIMENSIONS		NOMINAL TONS	CONNECTION		SHIP WEIGHT (LBS)
	W	D	H	h		W	H		LIQUID	SUCTION	
CAPF1824A6	14"	21"	18"	16 ³ / ₄ "	13"	16 ³ / ₄ "	14"	1½-2	3⁄8"	3⁄4"	32
CAPF1824B6	17½"	21"	18"	16 ⁵ / ₈ "	16½"	16 ³ / ₄ "	16"	1½-2	3⁄8"	3⁄4"	37
CAPF1824C6	21"	21"	22"	16 ⁵ / ₈ "	20"	16 ³ / ₄ "	14"	1½-2	3⁄8"	3⁄4"	41
CAPF3030A6	14"	21"	22"	20 ⁷ / ₁₆ "	13"	16 ³ / ₄ "	16"	2½	3⁄8"	3⁄4"	36
CAPF3030B6	17½"	21"	22"	18 ³ / ₄ "	16½"	16 ³ / ₄ "	16"	2½	3⁄8"	3⁄4"	40
CAPF3030C6	21"	21"	22"	17 ⁷ / ₈ "	20"	16 ³ / ₄ "	16"	2½	3⁄8"	3⁄4"	44
CAPF3030D6	24½"	21"	22"	17 ⁷ / ₈ "	23½"	16 ³ / ₄ "	16"	2½	3⁄8"	3⁄4"	49
CAPF3131B6	17½"	21"	22"	20 ⁷ / ₁₆ "	16½"	16 ³ / ₄ "	18"	2½	3⁄8"	3⁄4"	42
CAPF3131C6	21"	21"	26"	20"	20"	16 ³ / ₄ "	20"	2½	3⁄8"	7⁄8"	47
CAPF3636A6	14"	21"	22"	19½"	13"	16 ³ / ₄ "	16"	3	3⁄8"	7⁄8"	39
CAPF3636B6	17½"	21"	22"	19 ⁵ / ₈ "	16½"	16 ³ / ₄ "	16"	3	3⁄8"	7⁄8"	47
CAPF3636C6	21"	21"	22"	19 ⁵ / ₈ "	20"	16 ³ / ₄ "	16"	3	3⁄8"	7⁄8"	53
CAPF3636D6	24½"	21"	22"	19 ⁵ / ₈ "	23½"	16 ³ / ₄ "	16"	3	3⁄8"	7⁄8"	56
CAPF3642C6	21"	21"	22"	19"	20"	16 ³ / ₄ "	18"	3-3½	3⁄8"	7⁄8"	54
CAPF3642D6	24½"	21"	22"	19 ⁵ / ₈ "	23½"	16 ³ / ₄ "	18"	3-3½	3⁄8"	7⁄8"	57
CAPF3743C6	21"	21"	30"	28 ⁷ / ₁₆ "	20"	16 ³ / ₄ "	26"	3-3½	3⁄8"	7⁄8"	65
CAPF3743D6	24½"	21"	30"	27 ⁵ / ₈ "	23½"	16 ³ / ₄ "	26"	3-3½	3⁄8"	7⁄8"	72
CAPF4860C6	21"	21"	30"	28"	20"	16 ³ / ₄ "	26"	4-5	3⁄8"	7⁄8"	66
CAPF4860D6	24½"	21"	30"	28"	23½"	16 ³ / ₄ "	26"	4-5	3⁄8"	7⁄8"	73
CAPF4961C6	21"	21"	30"	28"	20"	16 ³ / ₄ "	26"	4-5	3⁄8"	7⁄8"	73
CAPF4961D6	24½"	21"	30"	27"	23½"	16 ³ / ₄ "	26"	4-5	3⁄8"	7⁄8"	81

DIMENSIONS

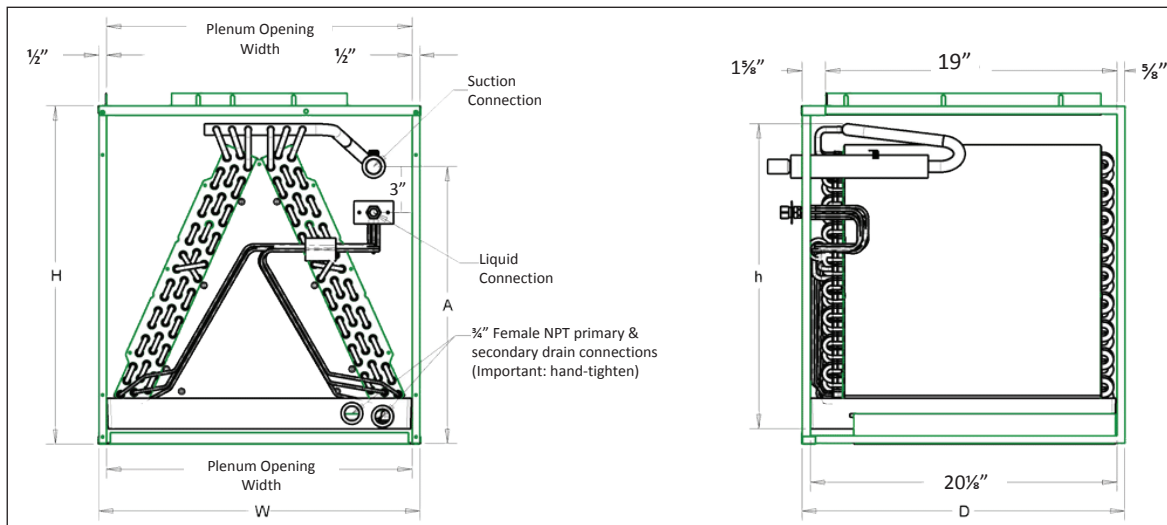

CHPF — PAINTED CASED HORIZONTAL “A” INDOOR COIL




SPECIFICATIONS

MODEL	CABINET DIMENSIONS			PLENUM		NOMINAL TONS	EVAP COIL FACE AREA*	COIL DIMENSIONS		CONNECTION		SHIP WEIGHT (LBS)
	W	D	H	W	H			W	H	LIQUID	SUCTION	
CHPF1824A6	21 $\frac{1}{8}$ "	26"	14"	19"	13"	1 $\frac{1}{2}$ -2	3 $\frac{1}{2}$	20 $\frac{1}{8}$ "	12"	$\frac{3}{8}$ "	$\frac{3}{4}$ "	36
CHPF2430B6	21 $\frac{1}{8}$ "	26"	17 $\frac{1}{2}$ "	19"	16 $\frac{1}{2}$ "	2-2 $\frac{1}{2}$	4 $\frac{1}{2}$	20 $\frac{1}{8}$ "	16"	$\frac{3}{8}$ "	$\frac{3}{4}$ "	55
CHPF3636B6	21 $\frac{1}{8}$ "	26"	17 $\frac{1}{2}$ "	19"	16 $\frac{1}{2}$ "	3	4 $\frac{1}{2}$	19 $\frac{1}{2}$ "	16"	$\frac{3}{8}$ "	$\frac{7}{8}$ "	50
CHPF3642C6	21 $\frac{1}{8}$ "	26"	21"	19"	20"	3-3 $\frac{1}{2}$	4 $\frac{1}{2}$	19 $\frac{1}{2}$ "	16"	$\frac{3}{8}$ "	$\frac{7}{8}$ "	63
CHPF3642D6	21 $\frac{1}{8}$ "	26"	24 $\frac{1}{2}$ "	19"	23 $\frac{1}{2}$ "	3-3 $\frac{1}{2}$	6	19 $\frac{1}{2}$ "	22"	$\frac{3}{8}$ "	$\frac{7}{8}$ "	66
CHPF3743C6	21 $\frac{1}{8}$ "	26"	21"	19"	20"	3-3 $\frac{1}{2}$	4 $\frac{1}{2}$	19 $\frac{1}{2}$ "	16"	$\frac{3}{8}$ "	$\frac{7}{8}$ "	63
CHPF3743D6	21 $\frac{1}{8}$ "	26"	24 $\frac{1}{2}$ "	19"	23 $\frac{1}{2}$ "	3-3 $\frac{1}{2}$	6	19 $\frac{1}{2}$ "	22"	$\frac{3}{8}$ "	$\frac{7}{8}$ "	63
CHPF4860D6	21 $\frac{1}{8}$ "	26"	24 $\frac{1}{2}$ "	19"	23 $\frac{1}{2}$ "	4-5	6	19 $\frac{1}{2}$ "	22"	$\frac{3}{8}$ "	$\frac{7}{8}$ "	77

* (ft²)

DIMENSIONS

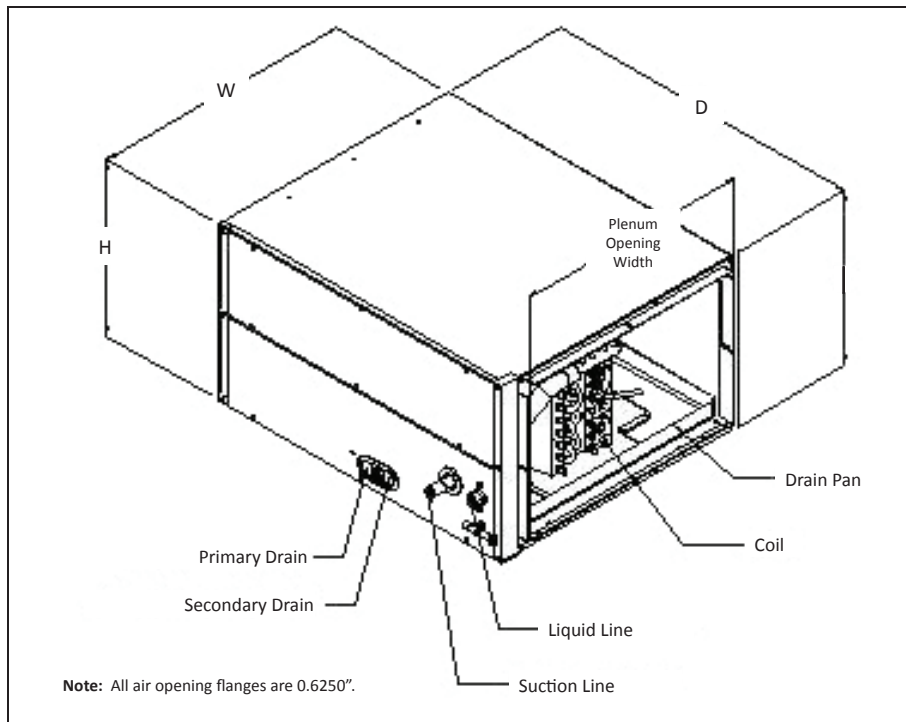

CSCF — HORIZONTAL SLAB EVAPORATOR COILS




SPECIFICATIONS


MODEL	CAPACITY (TONS)	EVAP COIL FACE AREA*	CONNECTION SIZE		SHIP WEIGHT (LBS)
			LIQUID	SUCTION	
CSCF1824N6	1½-2	3½	¾"	¾"	37
CSCF3036N6	2½-3	4½	¾"	7/8"	44
CSCF3642N6	3-3½	5½	¾"	7/8"	54
CSCF4860N6	4-5	5½	¾"	7/8"	60

* (ft²)

DIMENSIONS

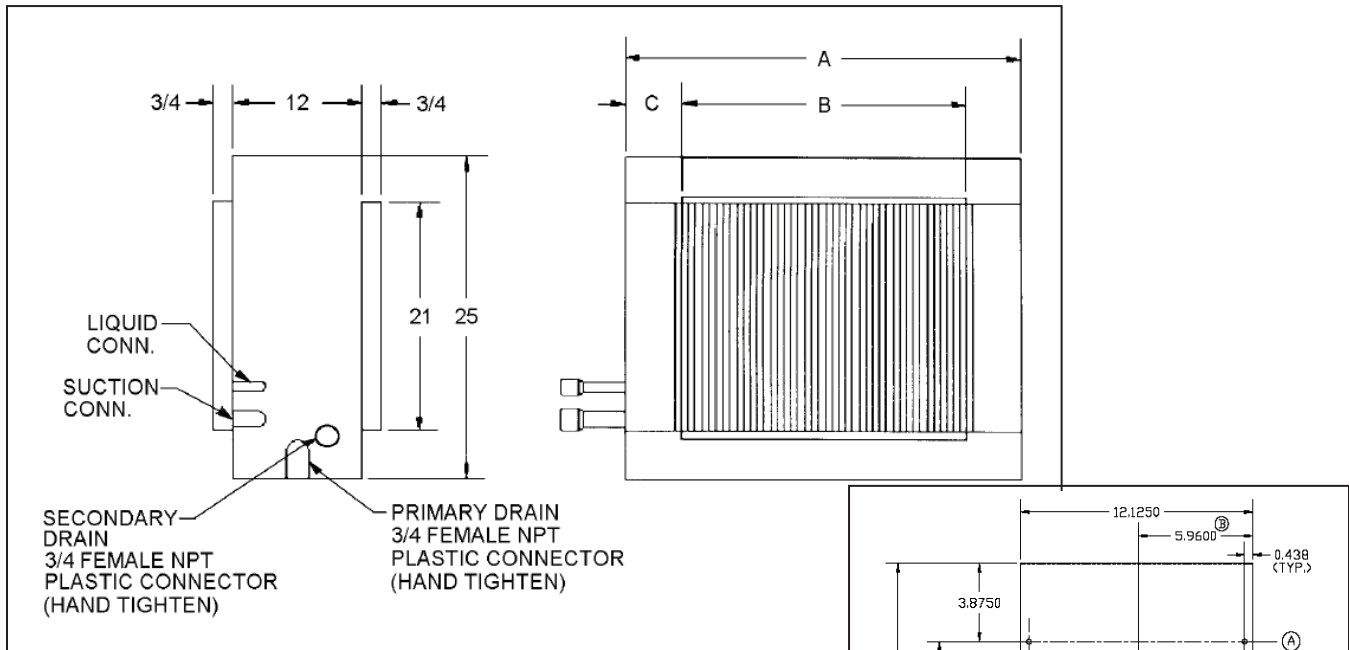

MODEL	CABINET DIMENSIONS			PLENUM OPENING		C WIDTH	COIL DIMENSIONS	
	W (A)	D	H	W (B)	H		W	H
CSCF1824N6	25½"	12"	25"	16"	21"	6"	19¾"	24"
CSCF3036N6	33½"	12"	25"	24"	21"	6"	28"	24"
CSCF3642N6	39½"	12"	25"	30"	21"	6"	34"	24"
CSCF4860N6	39½"	12"	25"	30"	21"	6"	34"	24"

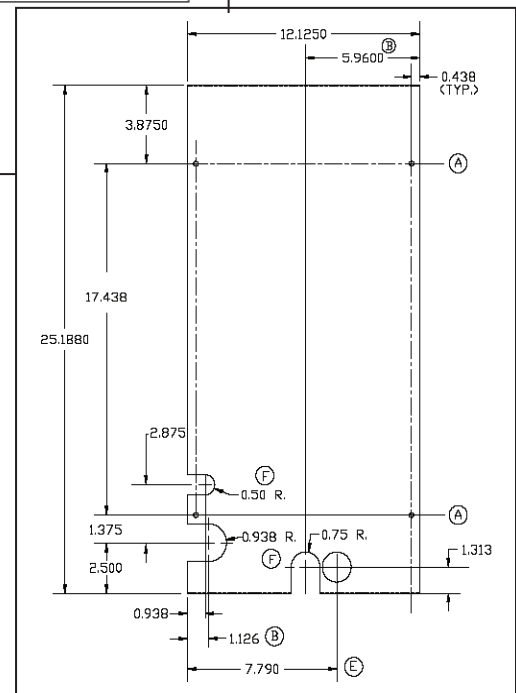

AIRFLOW DATA FOR CA*F

AIR QUANTITY (SCFM) vs. PRESSURE DROP (IN. WC)

	SCFM	400	500	600	700	800	900	1000	1100	1200										
CA*F1824A6*	Wet	0.071	0.099	0.142	0.183	0.230	0.280	0.331	0.389	---										
	Dry	0.062	0.090	0.122	0.154	0.189	0.231	0.278	0.331	0.390										
CA*F1824B6*	Wet	0.021	0.032	0.049	0.071	0.089	0.120	0.128	0.159	0.190										
	Dry	0.011	0.022	0.029	0.041	0.052	0.069	0.078	0.101	0.120										
CA*F1824C6*	Wet	0.017	0.025	0.043	0.061	0.079	0.107	0.114	0.140	0.164										
	Dry	0.011	0.017	0.024	0.035	0.044	0.063	0.075	0.094	0.113										
	SCFM	600	700	800	900	1000	1100	1200	1300	1400	1500									
CA*F3030A6*	Wet	0.151	0.173	0.204	0.238	0.267	0.281	0.326	0.380	0.406	0.451									
	Dry	0.069	0.083	0.117	0.132	0.148	0.183	0.206	0.239	0.290	0.338									
CA*F3030B6*	Wet	0.090	0.120	0.150	0.180	0.210	0.240	0.280	0.330	0.370	0.420									
	Dry	0.080	0.100	0.130	0.150	0.180	0.210	0.250	0.280	0.320	0.360									
CA*F3030C6*	Wet	0.071	0.087	0.120	0.134	0.155	0.180	0.209	0.249	0.284	0.328									
	Dry	0.050	0.067	0.098	0.113	0.135	0.169	0.189	0.213	0.245	0.275									
CA*F3030D6*	Wet	0.069	0.060	0.090	0.108	0.136	0.168	0.206	0.244	0.288	0.337									
	Dry	0.029	0.043	0.070	0.082	0.098	0.125	0.141	0.153	0.177	0.200									
	SCFM	600	700	800	900	1000	1100	1200	1300	1400	1500	1600								
CA*F3131B26*	Wet	0.041	0.049	0.061	0.078	0.090	0.113	0.131	0.140	0.162	0.178	0.210								
	Dry	0.021	0.031	0.039	0.048	0.061	0.072	0.079	0.091	0.110	0.122	0.141								
CA*F3131C6*	Wet	0.035	0.034	0.038	0.051	0.059	0.073	0.087	0.094	0.110	0.125	0.145								
	Dry	0.014	0.022	0.028	0.036	0.045	0.054	0.061	0.068	0.081	0.091	0.108								
	SCFM	600	700	800	900	1000	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000	2100	2200		
CA*F3636A6*	Wet	0.13	0.17	0.220	0.280	0.310	0.380	0.450	0.530	0.610	0.690	0.790	0.870	0.910	0.950	1.030	1.130	1.190		
	Dry	0.13	0.16	0.200	0.230	0.280	0.320	0.380	0.450	0.520	0.590	0.670	0.710	0.790	0.870	0.970	1.060	1.160		
CA*F3636B6*	Wet	0.11	0.13	0.160	0.180	0.220	0.260	0.300	0.350	0.400	0.460	0.520	0.570	0.600	0.660	0.720	0.790	0.850		
	Dry	0.11	0.13	0.160	0.170	0.210	0.240	0.270	0.330	0.370	0.420	0.470	0.520	0.550	0.610	0.660	0.720	0.770		
CA*F3636C6*	Wet	0.1	0.12	0.160	0.170	0.210	0.250	0.290	0.340	0.380	0.430	0.480	0.540	0.550	0.610	0.670	0.720	0.780		
	Dry	0.09	0.11	0.130	0.140	0.160	0.180	0.220	0.250	0.280	0.320	0.350	0.370	0.410	0.450	0.490	0.530	0.570		
CA*F3636D6*	Wet	0.08	0.11	0.130	0.140	0.170	0.200	0.230	0.270	0.310	0.350	0.390	0.430	0.460	0.500	0.560	0.620	0.660		
	Dry	0.09	0.11	0.130	0.140	0.160	0.190	0.220	0.240	0.270	0.300	0.340	0.380	0.410	0.440	0.490	0.530	0.580		
	SCFM	600	700	800	900	1000	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000	2100	2200		
CA*F3642C6*	Wet	0.07	0.09	0.110	0.120	0.140	0.170	0.200	0.230	0.260	0.290	0.330	0.360	0.380	0.420	0.460	0.500	0.540		
	Dry	0.07	0.08	0.100	0.110	0.130	0.150	0.170	0.200	0.230	0.250	0.280	0.310	0.330	0.370	0.400	0.430	0.470		
CA*F3642D6*	Wet	0.07	0.09	0.110	0.110	0.140	0.160	0.190	0.210	0.240	0.270	0.300	0.330	0.350	0.380	0.420	0.460	0.480		
	Dry	0.06	0.08	0.090	0.100	0.110	0.130	0.150	0.170	0.190	0.220	0.240	0.260	0.280	0.300	0.330	0.360	0.390		
	SCFM	800	900	1000	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000	2100	2200				
CA*F3743C6*	Wet	0.083	0.093	0.113	0.133	0.143	0.163	0.183	0.213	0.243	0.263	0.293	0.323	0.353	0.383	0.423				
	Dry	0.073	0.083	0.103	0.113	0.133	0.153	0.163	0.193	0.213	0.233	0.263	0.293	0.313	0.343	0.373				
CA*F3743D6*	Wet	0.074	0.080	0.089	0.107	0.120	0.129	0.138	0.169	0.188	0.209	0.229	0.251	0.273	0.279	0.306				
	Dry	0.046	0.056	0.074	0.076	0.086	0.107	0.110	0.126	0.147	0.160	0.176	0.196	0.210	0.230	0.253				
	SCFM	1000	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000	2100	2200						
CA*F4860C6*	Wet	0.167	0.175	0.191	0.244	0.266	0.299	0.355	0.370	0.413	0.454	0.498	0.586	0.601						
	Dry	0.160	0.157	0.194	0.206	0.246	0.264	0.220	0.265	0.290	0.309	0.364	0.389	0.562						
CA*F4860D6*	Wet	0.138	0.156	0.177	0.196	0.226	0.247	0.275	0.298	0.327	0.349	0.395	0.460	0.485						
	Dry	0.126	0.138	0.157	0.176	0.187	0.200	0.180	0.210	0.230	0.250	0.280	0.300	0.417						
	SCFM	1000	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000	2100	2200						
CA*F4961C6*	Wet	0.209	0.217	0.233	0.286	0.308	0.341	0.397	0.412	0.455	0.496	0.540	0.628	0.643						
	Dry	0.202	0.199	0.236	0.248	0.288	0.306	0.262	0.307	0.332	0.351	0.406	0.431	0.604						
CA*F4961D6*	Wet	0.140	0.158	0.179	0.198	0.228	0.249	0.277	0.300	0.329	0.351	0.397	0.462	0.487						
	Dry	0.128	0.140	0.159	0.178	0.189	0.202	0.182	0.212	0.232	0.252	0.282	0.302	0.419						

AIRFLOW DATA FOR CHPF

AIR QUANTITY (SCFM) vs. PRESSURE DROP (IN. WC)

	SCFM	600	700	800	900	1000	1100	1200	1300	1400						
CHPF 1824A6*	Wet	0.132	0.179	0.222	0.272	0.327	0.381	0.456	0.522	0.605						
	Dry	0.126	0.165	0.206	0.249	0.302	0.354	0.414	0.478	0.563						
	SCFM	600	700	800	900	1000	1100	1200	1300	1400	1500	1600				
CHPF 2430B6*	Wet	0.106	0.124	0.152	0.184	0.218	0.258	0.301	0.350	0.406	0.460	0.514				
	Dry	0.101	0.122	0.145	0.174	0.209	0.247	0.288	0.333	0.381	0.428	0.484				
	SCFM	600	700	800	900	1000	1100	1200	1300	1400	1500	1600				
CHPF 3636B6*	Wet	0.107	0.131	0.167	0.199	0.239	0.291	0.338	0.389	0.439	0.494	0.552				
	Dry	0.102	0.126	0.152	0.184	0.220	0.259	0.303	0.349	0.401	0.458	0.516				
	SCFM	800	900	1000	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000	2100	2200
CHPF 3642C6*	Wet	0.083	0.103	0.126	0.151	0.178	0.208	0.240	0.274	0.310	0.346	0.383	---	---	---	---
	Dry	0.073	0.096	0.120	0.144	0.169	0.196	0.224	0.254	0.286	0.319	0.354	---	---	---	---
CHPF 3642D6*	Wet	0.030	0.040	0.040	0.050	0.060	0.070	0.080	0.080	0.090	0.100	0.110	0.130	0.140	0.150	0.160
	Dry	0.040	0.050	0.060	0.070	0.080	0.080	0.090	0.100	0.110	0.120	0.120	0.120	0.150	0.160	0.180
	SCFM	800	900	1000	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000	2100	2200
CHPF 3743C6*	Wet	0.133	0.153	0.176	0.201	0.228	0.258	0.290	0.324	0.360	0.396	0.433	---	---	---	---
	Dry	0.123	0.146	0.170	0.194	0.219	0.246	0.274	0.304	0.336	0.369	0.404	---	---	---	---
CHPF 3743D6*	Wet	0.101	0.105	0.115	0.125	0.145	0.165	0.185	0.215	0.235	0.265	0.295	0.315	0.355	0.375	0.405
	Dry	0.072	0.095	0.105	0.115	0.135	0.155	0.185	0.205	0.225	0.255	0.275	0.305	0.335	0.365	0.395
	SCFM	900	1000	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000	2100	2200	
CHPF 4860D6*	Wet	0.101	0.121	0.131	0.161	0.181	0.201	0.231	0.261	0.291	0.321	0.361	0.391	0.431	0.471	
	Dry	0.101	0.121	0.141	0.161	0.181	0.201	0.221	0.251	0.281	0.311	0.341	0.371	0.411	0.441	

AIRFLOW DATA FOR CSCF

AIR QUANTITY (SCFM) vs. PRESSURE DROP (IN. WC)

	SCFM	500	600	700	800	900	1000	1100	1200										
CSCF18 24N6D*	Wet	0.104	0.143	0.176	0.212	0.255	0.292	0.321	0.344										
	Dry	0.048	0.067	0.086	0.108	0.132	0.159	0.186	0.206										
	SCFM			700	800	900	1000	1100	1200	1300	1400								
CSCF30 36N6D*	Wet			0.062	0.076	0.092	0.109	0.131	0.156	0.186	0.209								
	Dry			0.032	0.043	0.055	0.068	0.082	0.099	0.114	0.131								
	SCFM				800	900	1000	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000	2100	2200
CSCF36 42N6D*	Wet				0.045	0.063	0.081	0.099	0.116	0.132	0.148	0.166	0.183	0.202	0.22	0.236	0.259	0.278	0.291
	Dry				0.039	0.051	0.064	0.077	0.092	0.105	0.121	0.138	0.15	0.175	0.191	0.214	0.23	0.251	0.262
	SCFM				800	900	1000	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000	2100	2200
CSCF48 60N6D*	Wet				0.051	0.068	0.085	0.103	0.12	0.137	0.154	0.173	0.192	0.212	0.233	0.255	0.278	0.299	0.319
	Dry				0.043	0.056	0.069	0.084	0.099	0.115	0.132	0.149	0.167	0.185	0.207	0.227	0.249	0.272	0.282**

** Maximum SCFM = 2146

