

**PACKAGED GAS / ELECTRIC
ULTRA-LOW NO_x
13.4 SEER2 / 81% AFUE
2 to 5 TONS**



■ Contents

| | |
|-----------------------------|----|
| Nomenclature..... | 2 |
| Accessories | 2 |
| Product Specifications..... | 3 |
| Expanded Cooling Data | 4 |
| Airflow Data | 18 |
| Dimensions | 21 |
| Wiring Diagrams | 22 |

■ Standard Features

- Heavy-duty stainless-steel heat exchanger
- Energy-efficient scroll compressor
- Multi-Speed ECM indoor blower motor
- Single-stage gas valve
- All-aluminum evaporator coil
- Flowrater expansion device on 2- to 4-ton units
- TXV expansion device on 5-ton units
- Power-assisted combustion
- Direct spark ignition system includes a microprocessor-based control for the entire ignition sequence, all blower operation, and all safety circuits complete with self-diagnostics
- Eligible for installation in California’s South Coast Air Quality Management District (SCAQMD) and San Joaquin Valley Air Pollution Control District (SJVUAPCD). For California’s South Coast Air Quality Management District (SCAQMD) only: This furnace complies with the SCAQMD Rule 1111 14ng/j NO_x emission limit.
- AHRI Certified
- ETL Listed

■ Cabinet Features

- Fully insulated heavy-gauge, zinc-coated steel cabinet with UV-resistant powder-paint finish
- Horizontal or downflow application
- Aluminum foil-facing internal insulation reinforced with fiberglass scrim
- Compressor sound blanket
- Convenient access panels
- One roof curb fits all units
- One foot print: two heights
- Bottom, 2" high base rails for easier handling
- One footprint; two heights
- When properly anchored, meets the 2020 Florida Building Code unit integrity requirements for hurricane-type winds (Anchor bracket kits available.)



* Complete Warranty details available from your local dealer or at www.daikincomfort.com. To receive the Lifetime Heat Exchanger Warranty (good for as long as you own your home), and 12-Year Parts Limited Warranty, online registration must be completed within 60 days of installation. Additional requirements for annual maintenance are required for the Unit Replacement Limited Warranty. Online registration and some of the additional requirements are not required in California or Québec. The duration of warranty coverages in Texas differs in some cases.

NOMENCLATURE

| | D | P | 3 | U | M | 36 | 080 | 4 | 1 | A | A | |
|-------------------------|---|---|---|---|---|-----|--------|----|----|----|----|----------------------------------|
| | 1 | 2 | 3 | 4 | 5 | 6,7 | 8,9,10 | 11 | 12 | 13 | 14 | |
| Brand | | | | | | | | | | | | Minor Revision |
| D - Daikin | | | | | | | | | | | | A |
| Product Category | | | | | | | | | | | | Major Revision |
| P - Packaged Unit | | | | | | | | | | | | A |
| Efficiency | | | | | | | | | | | | Electrical |
| 3 - 13.4 SEER2 | | | | | | | | | | | | 1 - 208/230V single-phase, 60 Hz |
| 5 - 15.2 SEER2 | | | | | | | | | | | | Refrigerant |
| Unit Type | | | | | | | | | | | | 4 - R-410A |
| G Gas/Electric | | | | | | | | | | | | Heat Input |
| D Dual Fuel | | | | | | | | | | | | 040 40 MBTU/H 080 80 MBTU/H |
| U Ultra Low NOx | | | | | | | | | | | | 060 60 MBTU/H |
| Airflow | | | | | | | | | | | | Tonnage Nominal |
| M - Multi-position | | | | | | | | | | | | 24 - 2 tons 42 - 3½ tons |
| | | | | | | | | | | | | 30 - 2½ tons 48 - 4 tons |
| | | | | | | | | | | | | 36 - 3 tons 61 - 5 tons |

ACCESSORIES

| ACCESSORY DESCRIPTION | ITEM NUMBER | |
|---|----------------|-----------------------------|
| | MEDIUM CHASSIS | LARGE CHASSIS |
| Concentric Kit | CDK36 | CDK4872 |
| Downflow Economizer | PGEDJ101/102 | PGEDJ103 |
| Downflow Internal Filter Rack (with economizer) | DDNIFRPGMM | N/A (built into economizer) |
| Downflow Internal Filter Rack (no economizer) | DDNIFRPGA | DDNIFRPGA |
| Downflow Manual Damper | PGMDD101/102 | PGMDD103 |
| Downflow Motorized Damper | PGMDMD101/102 | PGMDMD103 |
| Downflow Square to Round | SQRPG101/102 | SQRPG103 |
| Economizer Wiring Harness (2-4 Tons) | 0259G00214 | 0259G00214 |
| Economizer Wiring Harness (5 Tons) | N/A | 0259L00412 |
| External Horizontal Filter Rack | DPHFRA | DPHFRA |
| High Altitude Kit (40K BTU) | HAUR40 | N/A |
| High Altitude Kit (60K BTU) | HAUR60 | N/A |
| High Altitude Kit (80K BTU) | HAUR80 | HAUR80 |
| Horizontal Duct Cover | 20464501PDGK | 20464502PDGK |
| Horizontal Economizer | DHZECNJP GCHM | DHZECNJP GCHL |
| Horizontal Manual Damper | PGMDH102 | PGMDH103 |
| Horizontal Motorized Damper | PGMDMH102 | PGMDMH103 |
| Horizontal Square to Round | SQRPGH101/102 | SQRPGH103 |
| Internal Horizontal Filter Rack | DHZIFRPGCHA | DHZIFRPGCHA |
| Outdoor Thermostat with Housing | OTDFPKG-01 | OTDFPKG-01 |
| Roof Curb | D14CRBPGCHMA | D14CRBPGCHMA |

| | DP3UM 2404041 | DP3UM 3006041 | DP3UM 3606041 | DP3UM 4208041 | DP3UM 4808041 | DP3UM 6108041 |
|---------------------------------------|------------------|------------------|------------------|------------------|------------------|------------------|
| COOLING CAPACITY | | | | | | |
| Total BTU/h | 23,000 | 28,600 | 34,200 | 40,000 | 46,250 | 56,000 |
| Sensible BTU/h | 18,800 | 23,080 | 28,160 | 30,980 | 36,190 | 43,175 |
| SEER2 / EER2 | 13.4 / 10.6 | 13.4 / 10.6 | 13.4 / 10.6 | 13.4 / 10.6 | 13.4 / 10.6 | 13.4 / 10.6 |
| Decibels | 78 | 78 | 78 | 78 | 79 | 78 |
| AHRI Reference #s | 209319522 | 209319528 | 209319534 | 209319540 | 209319546 | 209319552 |
| HEATING CAPACITY | | | | | | |
| Input BTU/h | 40,000 | 60,000 | 60,000 | 80,000 | 80,000 | 80,000 |
| Output BTU/h | 32,400 | 48,600 | 48,600 | 64,800 | 64,800 | 64,800 |
| AFUE | 81 | 81 | 81 | 81 | 81 | 81 |
| Temperature Rise Range | 20 - 50 | 30 - 60 | 30 - 60 | 30 - 60 | 30 - 60 | 30 - 60 |
| No. of Burners | 1 | 1 | 1 | 1 | 1 | 1 |
| EVAPORATOR MOTOR | | | | | | |
| Type | ECM | ECM | ECM | ECM | ECM | ECM |
| Wheel (D x W) | 10" x 8" | 10" x 8" | 10" x 9" | 11" x 10" | 11" x 10" | 11" x 10" |
| Indoor Nominal CFM | 800 | 1,000 | 1,200 | 1,300 | 1,525 | 1325 L / 1700 H |
| No. of Speeds | 5 | 5 | 5 | 5 | 5 | 5 |
| Horsepower | 1/2 | 1/2 | 1/2 | 3/4 | 3/4 | 1 |
| EVAPORATOR COIL | | | | | | |
| Face Area (ft ²) | 4.35 | 4.35 | 4.35 | 5.68 | 5.68 | 5.68 |
| Rows Deep/Fins per Inch | 3/14 | 3/14 | 4/14 | 4/14 | 4/14 | 4/14 |
| Piston Size (Cooling) | 0.057 | 0.062 | 0.068 | 0.072 | 5.68 | 5.68 |
| Drain Size (NPT) | 3/4" | 3/4" | 3/4" | 3/4" | 3/4" | 3/4" |
| Refrigerant Charge (oz.) | 75 | 78 | 92 | 103 | 107 | 100 |
| CONDENSER FAN / COIL | | | | | | |
| Horsepower - RPM | 1/6 - 815 | 1/4 - 1,075 | 1/4 - 1,075 | 1/4 - 1,075 | 1/3 - 1,122 | 1/3 - 1,122 |
| Diameter / # of Blades | 22" / 3 | 22" / 3 | 22" / 3 | 22" / 3 | 22" / 3 | 22" / 3 |
| Outdoor Nominal CFM | 2,150 | 3,050 | 2,850 | 3,300 | 3,000 | 3,000 |
| Face Area (ft ²) | 12.29 | 12.29 | 11.13 | 15.36 | 14.37 | 14.37 |
| Rows Deep/Fins per Inch | 1/27 | 1/24 | 2/27 | 1/24 | 2/27 | 2/27 |
| COMPRESSOR | | | | | | |
| Quantity / Type | 1 / Scroll | 1 / Scroll | 1 / Scroll | 1 / Scroll | 1 / Scroll | 1 / Scroll |
| Stage | Single | Single | Single | Single | Single | Two |
| Compressor RLA/LRA | 13.5 / 58.3 | 14.1 / 73 | 14.1/77.0 | 17.9 / 112 | 19.9 / 110.00 | 25.6 / 158.0 |
| ELECTRICAL DATA | | | | | | |
| Voltage-Phase (Frequency 60Hz) | 208/230-1 | 208/230-1 | 208/230-1 | 208/230-1 | 208/230-1 | 208/230-1 |
| Indoor Blower FLA | 3.8 | 3.8 | 3.8 | 5.4 | 5.4 | 7.0 |
| Outdoor Fan FLA/LRA | 0.95/2.0 | 1.4 / 3.2 | 1.4 / 3.2 | 1.4 / 3.2 | 2.0 / 4.4 | 2.0 / 4.4 |
| Min. Circuit Ampacity | 21.6 | 22.8 | 22.8 | 29.2 | 32.3 | 41 |
| Max. Overcurrent Protection | 35 amps | 35 amps | 35 amps | 45 amps | 50 amps | 60 amps |
| Entrance Size Power Supply | 1 1/8" | 1 1/8" | 1 1/8" | 1 1/8" | 1 1/8" | 1 1/8" |
| Entrance Size Control Voltage | 7/8" | 7/8" | 7/8" | 7/8" | 7/8" | 7/8" |
| OPERATING / SHIP WEIGHTS (LBS) | | | | | | |
| | 412 / 435 | 420 / 442 | 496 / 520 | 523 / 545 | 533 / 555 | 533 / 555 |

¹ Wire size should be determined in accordance with National Electrical Codes. Extensive wire runs will require larger wire sizes.

² Must use time-delay fuses or HACR-type circuit breakers of the same size as noted.

Note: Always check the S&R plate for electrical data on the unit being installed.

| IDB | Airflow | Outdoor Ambient Temperature | | | | | | | | | | | | | | | | | | | | | | | |
|------------|---------|-----------------------------|-------|-------|-----|-------|-------|-------|-----|-------|-------|-------|-----|-------|-------|-------|-----|-------|-------|-------|-----|-------|-------|-------|----|
| | | 65 | | | | 75 | | | | 85 | | | | 95 | | | | 105 | | | | 115 | | | |
| | | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 |
| 80 | MBh | 23.4 | 23.7 | 24.4 | - | 23.2 | 23.5 | 24.2 | - | 22.6 | 22.9 | 23.6 | - | 21.5 | 21.9 | 22.6 | - | 20.2 | 20.6 | 21.3 | - | 19.1 | 19.4 | 20.1 | - |
| | S/T | 0.65 | 0.57 | 0.42 | - | 0.66 | 0.58 | 0.43 | - | 0.69 | 0.60 | 0.46 | - | 1.00 | 0.63 | 0.48 | - | 1.00 | 0.65 | 0.50 | - | 1.00 | 0.70 | 0.56 | - |
| | ΔT | 20.09 | 18.23 | 14.76 | - | 20.04 | 18.18 | 14.71 | - | 20.30 | 18.44 | 14.97 | - | 20.02 | 18.16 | 14.69 | - | 19.77 | 17.91 | 14.44 | - | 20.93 | 19.08 | 15.61 | - |
| | kW | 1.53 | 1.53 | 1.53 | - | 1.73 | 1.73 | 1.72 | - | 1.95 | 1.94 | 1.94 | - | 2.18 | 2.18 | 2.18 | - | 2.45 | 2.44 | 2.44 | - | 2.76 | 2.75 | 2.75 | - |
| | Amps | 6.15 | 6.14 | 6.12 | - | 7.04 | 7.03 | 7.02 | - | 8.04 | 8.03 | 8.02 | - | 9.12 | 9.11 | 9.10 | - | 10.33 | 10.32 | 10.30 | - | 11.74 | 11.73 | 11.72 | - |
| | Hi PR | 263 | 264 | 266 | - | 305 | 306 | 307 | - | 348 | 349 | 351 | - | 395 | 396 | 398 | - | 445 | 446 | 448 | - | 499 | 500 | 502 | - |
| Lo PR | 126 | 128 | 131 | - | 134 | 135 | 138 | - | 140 | 142 | 145 | - | 146 | 148 | 151 | - | 152 | 153 | 156 | - | 159 | 160 | 163 | - | |
| 800 | MBh | 23.7 | 24.0 | 24.7 | - | 23.5 | 23.8 | 24.5 | - | 22.9 | 23.2 | 23.9 | - | 21.8 | 22.2 | 22.9 | - | 20.6 | 20.9 | 21.6 | - | 19.4 | 19.7 | 20.4 | - |
| | S/T | 0.72 | 0.64 | 0.49 | - | 0.72 | 0.64 | 0.50 | - | 0.75 | 0.67 | 0.52 | - | 1.00 | 0.69 | 0.54 | - | 1.00 | 0.71 | 0.57 | - | 1.00 | 0.77 | 0.62 | - |
| | ΔT | 18.97 | 17.11 | 13.64 | - | 18.92 | 17.06 | 13.59 | - | 19.18 | 17.32 | 13.85 | - | 18.90 | 17.04 | 13.57 | - | 18.65 | 16.79 | 13.32 | - | 19.81 | 17.95 | 14.49 | - |
| | kW | 1.54 | 1.54 | 1.54 | - | 1.74 | 1.74 | 1.73 | - | 1.96 | 1.96 | 1.95 | - | 2.19 | 2.19 | 2.19 | - | 2.46 | 2.45 | 2.45 | - | 2.77 | 2.76 | 2.76 | - |
| | Amps | 6.19 | 6.19 | 6.17 | - | 7.09 | 7.08 | 7.06 | - | 8.08 | 8.08 | 8.06 | - | 9.17 | 9.16 | 9.14 | - | 10.37 | 10.36 | 10.35 | - | 11.79 | 11.78 | 11.77 | - |
| | Hi PR | 265 | 266 | 268 | - | 307 | 308 | 310 | - | 350 | 351 | 353 | - | 397 | 398 | 400 | - | 448 | 449 | 451 | - | 501 | 503 | 504 | - |
| Lo PR | 128 | 129 | 133 | - | 136 | 137 | 140 | - | 142 | 144 | 147 | - | 148 | 149 | 153 | - | 153 | 155 | 158 | - | 160 | 162 | 165 | - | |
| 900 | MBh | 24.1 | 24.4 | 25.1 | - | 23.9 | 24.2 | 24.9 | - | 23.3 | 23.6 | 24.3 | - | 22.2 | 22.5 | 23.2 | - | 20.9 | 21.3 | 21.9 | - | 19.7 | 20.1 | 20.8 | - |
| | S/T | 0.75 | 0.67 | 0.53 | - | 0.76 | 0.68 | 0.53 | - | 1.00 | 0.71 | 0.56 | - | 1.00 | 0.73 | 0.58 | - | 1.00 | 0.75 | 0.60 | - | 1.00 | 1.00 | 0.66 | - |
| | ΔT | 18.02 | 16.16 | 12.70 | - | 17.97 | 16.11 | 12.64 | - | 18.23 | 16.37 | 12.91 | - | 17.95 | 16.09 | 12.63 | - | 17.70 | 15.85 | 12.38 | - | 18.87 | 17.01 | 13.54 | - |
| | kW | 1.55 | 1.55 | 1.55 | - | 1.75 | 1.75 | 1.74 | - | 1.97 | 1.96 | 1.96 | - | 2.20 | 2.20 | 2.20 | - | 2.46 | 2.46 | 2.46 | - | 2.77 | 2.77 | 2.77 | - |
| | Amps | 6.23 | 6.22 | 6.21 | - | 7.13 | 7.12 | 7.10 | - | 8.12 | 8.12 | 8.10 | - | 9.20 | 9.20 | 9.18 | - | 10.41 | 10.40 | 10.39 | - | 11.83 | 11.82 | 11.80 | - |
| | Hi PR | 267 | 269 | 270 | - | 309 | 310 | 312 | - | 352 | 354 | 355 | - | 399 | 400 | 402 | - | 450 | 451 | 453 | - | 504 | 505 | 507 | - |
| Lo PR | 130 | 131 | 135 | - | 138 | 139 | 142 | - | 144 | 146 | 149 | - | 150 | 152 | 155 | - | 156 | 157 | 160 | - | 162 | 164 | 167 | - | |

| | | | | | | | | | | | | | | | | | | | | | | | | | |
|------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| 700 | MBh | 23.4 | 23.7 | 24.4 | 25.5 | 23.2 | 23.5 | 24.2 | 25.3 | 22.6 | 22.9 | 23.6 | 24.7 | 21.5 | 21.9 | 22.6 | 23.6 | 20.3 | 20.6 | 21.3 | 22.4 | 19.1 | 19.4 | 20.1 | 21.2 |
| | S/T | 0.79 | 0.71 | 0.56 | 0.4 | 1.00 | 0.72 | 0.57 | 0.4 | 1.00 | 0.74 | 0.60 | 0.4 | 1.00 | 0.76 | 0.62 | 0.5 | 1.00 | 0.79 | 0.64 | 0.5 | 1.00 | 1.00 | 0.70 | 0.5 |
| | ΔT | 24.17 | 22.32 | 18.85 | 15.3 | 24.12 | 22.27 | 18.80 | 15.2 | 24.38 | 22.53 | 19.06 | 15.5 | 24.10 | 22.25 | 18.78 | 15.2 | 23.86 | 22.00 | 18.53 | 14.9 | 25.02 | 23.16 | 19.69 | 16.1 |
| | kW | 1.53 | 1.53 | 1.53 | 1.5 | 1.73 | 1.73 | 1.72 | 1.7 | 1.95 | 1.94 | 1.94 | 2.0 | 2.18 | 2.18 | 2.18 | 2.2 | 2.44 | 2.44 | 2.44 | 2.5 | 2.75 | 2.75 | 2.75 | 2.8 |
| | Amps | 6.14 | 6.13 | 6.12 | 6.2 | 7.03 | 7.03 | 7.01 | 7.1 | 8.03 | 8.03 | 8.01 | 8.1 | 9.11 | 9.11 | 9.09 | 9.2 | 10.32 | 10.31 | 10.30 | 10.4 | 11.74 | 11.73 | 11.71 | 11.8 |
| | Hi PR | 263 | 264 | 266 | 270.8 | 305 | 306 | 308 | 312.3 | 348 | 349 | 351 | 355.8 | 395 | 396 | 398 | 402.6 | 446 | 447 | 448 | 453.1 | 499 | 501 | 502 | 507.0 |
| Lo PR | 126 | 128 | 131 | 136.1 | 134 | 135 | 138 | 143.8 | 140 | 142 | 145 | 150.5 | 146 | 148 | 151 | 156.2 | 152 | 153 | 156 | 161.8 | 159 | 160 | 163 | 168.7 | |
| 800 | MBh | 23.7 | 24.1 | 24.8 | 25.8 | 23.5 | 23.8 | 24.5 | 25.6 | 22.9 | 23.2 | 23.9 | 25.0 | 21.8 | 22.2 | 22.9 | 23.9 | 20.6 | 20.9 | 21.6 | 22.7 | 19.4 | 19.7 | 20.4 | 21.5 |
| | S/T | 0.86 | 0.77 | 0.63 | 0.5 | 1.00 | 0.78 | 0.63 | 0.5 | 1.00 | 0.81 | 0.66 | 0.5 | 1.00 | 0.83 | 0.68 | 0.5 | 1.00 | 1.00 | 0.71 | 0.6 | 1.00 | 1.00 | 0.76 | 0.6 |
| | ΔT | 23.05 | 21.19 | 17.72 | 14.1 | 23.00 | 21.14 | 17.67 | 14.1 | 23.26 | 21.40 | 17.94 | 14.3 | 22.98 | 21.12 | 17.66 | 14.1 | 22.73 | 20.88 | 17.41 | 13.8 | 23.90 | 22.04 | 18.57 | 15.0 |
| | kW | 1.54 | 1.54 | 1.54 | 1.6 | 1.74 | 1.74 | 1.73 | 1.7 | 1.96 | 1.95 | 1.95 | 2.0 | 2.19 | 2.19 | 2.19 | 2.2 | 2.45 | 2.45 | 2.45 | 2.5 | 2.76 | 2.76 | 2.76 | 2.8 |
| | Amps | 6.19 | 6.18 | 6.16 | 6.2 | 7.08 | 7.07 | 7.06 | 7.1 | 8.08 | 8.07 | 8.06 | 8.1 | 9.16 | 9.15 | 9.14 | 9.2 | 10.37 | 10.36 | 10.34 | 10.4 | 11.78 | 11.77 | 11.76 | 11.8 |
| | Hi PR | 265 | 267 | 268 | 273.0 | 307 | 308 | 310 | 314.5 | 350 | 352 | 353 | 358.0 | 397 | 398 | 400 | 404.8 | 448 | 449 | 451 | 455.3 | 502 | 503 | 505 | 509.2 |
| Lo PR | 128 | 129 | 133 | 138.0 | 136 | 137 | 140 | 145.7 | 142 | 144 | 147 | 152.4 | 148 | 149 | 153 | 158.1 | 153 | 155 | 158 | 163.6 | 160 | 162 | 165 | 170.6 | |
| 900 | MBh | 24.1 | 24.4 | 25.1 | 26.2 | 23.9 | 24.2 | 24.9 | 26.0 | 23.3 | 23.6 | 24.3 | 25.4 | 22.2 | 22.5 | 23.2 | 24.3 | 20.9 | 21.3 | 22.0 | 23.0 | 19.8 | 20.1 | 20.8 | 21.9 |
| | S/T | 0.89 | 0.81 | 0.66 | 0.5 | 1.00 | 0.82 | 0.67 | 0.5 | 1.00 | 0.84 | 0.70 | 0.5 | 1.00 | 0.87 | 0.72 | 0.6 | 1.00 | 1.00 | 0.74 | 0.6 | 1.00 | 1.00 | 0.80 | 0.6 |
| | ΔT | 22.11 | 20.25 | 16.78 | 13.2 | 22.06 | 20.20 | 16.73 | 13.1 | 22.32 | 20.46 | 16.99 | 13.4 | 22.04 | 20.18 | 16.71 | 13.1 | 21.79 | 19.93 | 16.46 | 12.9 | 22.95 | 21.09 | 17.63 | 14.0 |
| | kW | 1.55 | 1.55 | 1.55 | 1.6 | 1.75 | 1.74 | 1.74 | 1.8 | 1.96 | 1.96 | 1.96 | 2.0 | 2.20 | 2.20 | 2.19 | 2.2 | 2.46 | 2.46 | 2.46 | 2.5 | 2.77 | 2.77 | 2.77 | 2.8 |
| | Amps | 6.23 | 6.22 | 6.20 | 6.3 | 7.12 | 7.11 | 7.10 | 7.2 | 8.12 | 8.11 | 8.10 | 8.2 | 9.20 | 9.19 | 9.18 | 9.2 | 10.40 | 10.40 | 10.38 | 10.5 | 11.82 | 11.81 | 11.80 | 11.9 |
| | Hi PR | 268 | 269 | 271 | 275.2 | 309 | 310 | 312 | 316.7 | 353 | 354 | 356 | 360.2 | 399 | 401 | 402 | 407.0 | 450 | 451 | 453 | 457.5 | 504 | 505 | 507 | 511.4 |
| Lo PR | 130 | 131 | 135 | 140.1 | 138 | 139 | 142 | 147.7 | 144 | 146 | 149 | 154.4 | 150 | 152 | 155 | 160.1 | 156 | 157 | 160 | 165.7 | 163 | 164 | 167 | 172.7 | |

IDB: Entering Indoor Dry Bulb Temperature
 High and low pressures are measured at the liquid and suction access fittings.
 Shaded area reflects ACCA (TVA) conditions.
 Amps: Unit amps (comp. + evaporator + condenser fan motors)
 kW = Total system power

| IDB | Airflow | Outdoor Ambient Temperature | | | | | | | | | | | | | | | | | | | | | | | |
|------------|---------|-----------------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| | | 65 | | | | 75 | | | | 85 | | | | 95 | | | | 105 | | | | 115 | | | |
| | | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 |
| 80 | MBh | 23.5 | 23.9 | 24.6 | 25.6 | 23.3 | 23.7 | 24.4 | 25.4 | 22.7 | 23.0 | 23.7 | 24.8 | 21.7 | 22.0 | 22.7 | 23.8 | 20.4 | 20.7 | 21.4 | 22.5 | 19.2 | 19.5 | 20.2 | 21.3 |
| | S/T | 1.00 | 0.84 | 0.70 | 0.5 | 1.00 | 0.85 | 0.71 | 0.6 | 1.00 | 0.88 | 0.73 | 0.6 | 1.00 | 1.00 | 0.75 | 0.6 | 1.00 | 1.00 | 0.78 | 0.6 | 1.00 | 1.00 | 0.83 | 0.7 |
| | ΔT | 28.29 | 26.43 | 22.96 | 19.4 | 28.24 | 26.38 | 22.91 | 19.3 | 28.50 | 26.64 | 23.17 | 19.6 | 28.22 | 26.36 | 22.89 | 19.3 | 27.97 | 26.11 | 22.64 | 19.0 | 29.13 | 27.27 | 23.81 | 20.2 |
| | kW | 1.53 | 1.53 | 1.53 | 1.5 | 1.73 | 1.73 | 1.72 | 1.7 | 1.95 | 1.94 | 1.94 | 2.0 | 2.18 | 2.18 | 2.18 | 2.2 | 2.45 | 2.44 | 2.44 | 2.5 | 2.76 | 2.75 | 2.75 | 2.8 |
| | Amps | 6.15 | 6.14 | 6.12 | 6.2 | 7.04 | 7.03 | 7.02 | 7.1 | 8.04 | 8.03 | 8.02 | 8.1 | 9.12 | 9.11 | 9.10 | 9.2 | 10.32 | 10.32 | 10.30 | 10.4 | 11.74 | 11.73 | 11.72 | 11.8 |
| | Hi PR | 264 | 265 | 267 | 271.3 | 305 | 306 | 308 | 312.8 | 349 | 350 | 352 | 356.3 | 396 | 397 | 399 | 403.1 | 446 | 447 | 449 | 453.6 | 500 | 501 | 503 | 507.4 |
| Lo PR | 127 | 128 | 131 | 136.7 | 134 | 136 | 139 | 144.4 | 141 | 143 | 146 | 151.1 | 147 | 148 | 151 | 156.8 | 152 | 154 | 157 | 162.3 | 159 | 161 | 164 | 169.3 | |
| 800 | MBh | 23.8 | 24.2 | 24.9 | 25.9 | 23.6 | 24.0 | 24.7 | 25.7 | 23.0 | 23.4 | 24.1 | 25.1 | 22.0 | 22.3 | 23.0 | 24.1 | 20.7 | 21.0 | 21.7 | 22.8 | 19.5 | 19.8 | 20.5 | 21.6 |
| | S/T | 1.00 | 0.91 | 0.76 | 0.6 | 1.00 | 0.92 | 0.77 | 0.6 | 1.00 | 0.94 | 0.80 | 0.6 | 1.00 | 1.00 | 0.82 | 0.7 | 1.00 | 1.00 | 0.84 | 0.7 | 1.00 | 1.00 | 0.90 | 0.7 |
| | ΔT | 27.16 | 25.31 | 21.84 | 18.2 | 27.11 | 25.26 | 21.79 | 18.2 | 27.37 | 25.52 | 22.05 | 18.5 | 27.09 | 25.24 | 21.77 | 18.2 | 26.85 | 24.99 | 21.52 | 17.9 | 28.01 | 26.15 | 22.68 | 19.1 |
| | kW | 1.54 | 1.54 | 1.54 | 1.6 | 1.74 | 1.74 | 1.73 | 1.7 | 1.96 | 1.95 | 1.95 | 2.0 | 2.19 | 2.19 | 2.19 | 2.2 | 2.46 | 2.45 | 2.45 | 2.5 | 2.77 | 2.76 | 2.76 | 2.8 |
| | Amps | 6.19 | 6.18 | 6.17 | 6.2 | 7.09 | 7.08 | 7.06 | 7.1 | 8.08 | 8.08 | 8.06 | 8.1 | 9.16 | 9.16 | 9.16 | 9.2 | 10.37 | 10.36 | 10.35 | 10.4 | 11.79 | 11.78 | 11.76 | 11.8 |
| | Hi PR | 266 | 267 | 269 | 273.5 | 307 | 309 | 310 | 315.0 | 351 | 352 | 354 | 358.5 | 398 | 399 | 401 | 405.3 | 448 | 449 | 451 | 455.8 | 502 | 503 | 505 | 509.7 |
| Lo PR | 128 | 130 | 133 | 138.6 | 136 | 138 | 141 | 146.2 | 143 | 144 | 148 | 152.9 | 148 | 150 | 153 | 158.6 | 154 | 156 | 159 | 164.2 | 161 | 163 | 166 | 171.2 | |
| 900 | MBh | 24.2 | 24.5 | 25.2 | 26.3 | 24.0 | 24.3 | 25.0 | 26.1 | 23.4 | 23.7 | 24.4 | 25.5 | 22.3 | 22.7 | 23.4 | 24.4 | 21.1 | 21.4 | 22.1 | 23.2 | 19.9 | 20.2 | 20.9 | 22.0 |
| | S/T | 1.00 | 0.95 | 0.80 | 0.6 | 1.00 | 0.95 | 0.81 | 0.7 | 1.00 | 1.00 | 0.83 | 0.7 | 1.00 | 1.00 | 0.85 | 0.7 | 1.00 | 1.00 | 0.88 | 0.7 | 1.00 | 1.00 | 1.00 | 0.8 |
| | ΔT | 26.22 | 24.36 | 20.89 | 17.3 | 26.17 | 24.31 | 20.84 | 17.2 | 26.43 | 24.57 | 21.10 | 17.5 | 26.15 | 24.29 | 20.82 | 17.2 | 25.90 | 24.04 | 20.57 | 17.0 | 27.06 | 25.21 | 21.74 | 18.1 |
| | kW | 1.55 | 1.55 | 1.55 | 1.6 | 1.75 | 1.75 | 1.74 | 1.8 | 1.96 | 1.96 | 1.96 | 2.0 | 2.20 | 2.20 | 2.20 | 2.2 | 2.46 | 2.46 | 2.46 | 2.5 | 2.77 | 2.77 | 2.77 | 2.8 |
| | Amps | 6.23 | 6.22 | 6.21 | 6.3 | 7.12 | 7.12 | 7.10 | 7.2 | 8.12 | 8.12 | 8.10 | 8.2 | 9.20 | 9.20 | 9.18 | 9.2 | 10.41 | 10.40 | 10.39 | 10.5 | 11.83 | 11.82 | 11.80 | 11.9 |
| | Hi PR | 268 | 269 | 271 | 275.7 | 310 | 311 | 313 | 317.2 | 353 | 354 | 356 | 360.7 | 400 | 401 | 403 | 407.5 | 450 | 452 | 453 | 458.0 | 504 | 505 | 507 | 511.8 |
| Lo PR | 130 | 132 | 135 | 140.6 | 138 | 140 | 143 | 148.3 | 145 | 146 | 150 | 155.0 | 151 | 152 | 155 | 160.7 | 156 | 158 | 161 | 166.2 | 163 | 165 | 168 | 173.2 | |

| | | | | | | | | | | | | | | | | | | | | | | | | | |
|------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| 700 | MBh | 23.9 | 24.3 | 25.0 | 26.0 | 23.7 | 24.1 | 24.7 | 25.8 | 23.1 | 23.4 | 24.1 | 25.2 | 22.1 | 22.4 | 23.1 | 24.2 | 20.8 | 21.1 | 21.8 | 22.9 | 19.6 | 19.9 | 20.6 | 21.7 |
| | S/T | 1.00 | 0.95 | 0.81 | 0.7 | 1.00 | 1.00 | 0.81 | 0.7 | 1.00 | 1.00 | 0.84 | 0.7 | 1.00 | 1.00 | 0.86 | 0.7 | 1.00 | 1.00 | 0.88 | 0.7 | 1.00 | 1.00 | 1.00 | 0.8 |
| | ΔT | 31.93 | 30.08 | 26.61 | 23.0 | 31.88 | 30.03 | 26.56 | 23.0 | 32.14 | 30.29 | 26.82 | 23.2 | 31.86 | 30.01 | 26.54 | 22.9 | 31.62 | 29.76 | 26.29 | 22.7 | 32.78 | 30.92 | 27.45 | 23.9 |
| | kW | 1.54 | 1.53 | 1.53 | 1.5 | 1.73 | 1.73 | 1.73 | 1.7 | 1.95 | 1.95 | 1.95 | 2.0 | 2.19 | 2.18 | 2.18 | 2.2 | 2.45 | 2.45 | 2.44 | 2.5 | 2.76 | 2.76 | 2.76 | 2.8 |
| | Amps | 6.16 | 6.16 | 6.14 | 6.2 | 7.06 | 7.05 | 7.03 | 7.1 | 8.05 | 8.05 | 8.03 | 8.1 | 9.13 | 9.13 | 9.11 | 9.2 | 10.34 | 10.33 | 10.32 | 10.4 | 11.76 | 11.75 | 11.73 | 11.8 |
| | Hi PR | 265 | 266 | 268 | 272.5 | 306 | 308 | 309 | 314.0 | 350 | 351 | 353 | 357.5 | 397 | 398 | 400 | 404.3 | 447 | 448 | 450 | 454.8 | 501 | 502 | 504 | 508.7 |
| Lo PR | 128 | 130 | 133 | 138.6 | 136 | 138 | 141 | 146.3 | 143 | 144 | 148 | 153.0 | 149 | 150 | 153 | 158.6 | 154 | 156 | 159 | 164.2 | 161 | 163 | 166 | 171.2 | |
| 800 | MBh | 24.2 | 24.6 | 25.3 | 26.3 | 24.0 | 24.4 | 25.1 | 26.1 | 23.4 | 23.7 | 24.4 | 25.5 | 22.4 | 22.7 | 23.4 | 24.5 | 21.1 | 21.4 | 22.1 | 23.2 | 19.9 | 20.2 | 20.9 | 22.0 |
| | S/T | 1.00 | 1.00 | 0.87 | 0.7 | 1.00 | 1.00 | 0.88 | 0.7 | 1.00 | 1.00 | 0.91 | 0.8 | 1.00 | 1.00 | 0.93 | 0.8 | 1.00 | 1.00 | 1.00 | 0.8 | 1.00 | 1.00 | 1.00 | 0.9 |
| | ΔT | 30.81 | 28.95 | 25.49 | 21.9 | 30.76 | 28.90 | 25.43 | 21.8 | 31.02 | 29.16 | 25.70 | 22.1 | 30.74 | 28.88 | 25.42 | 21.8 | 30.49 | 28.64 | 25.17 | 21.6 | 31.66 | 29.80 | 26.33 | 22.7 |
| | kW | 1.55 | 1.55 | 1.54 | 1.6 | 1.74 | 1.74 | 1.74 | 1.8 | 1.96 | 1.96 | 1.96 | 2.0 | 2.20 | 2.19 | 2.19 | 2.2 | 2.46 | 2.46 | 2.45 | 2.5 | 2.77 | 2.77 | 2.76 | 2.8 |
| | Amps | 6.21 | 6.20 | 6.19 | 6.3 | 7.10 | 7.10 | 7.08 | 7.1 | 8.10 | 8.09 | 8.08 | 8.1 | 9.18 | 9.17 | 9.16 | 9.2 | 10.39 | 10.38 | 10.37 | 10.4 | 11.80 | 11.80 | 11.78 | 11.8 |
| | Hi PR | 267 | 268 | 270 | 274.8 | 309 | 310 | 312 | 316.3 | 352 | 353 | 355 | 359.7 | 399 | 400 | 402 | 406.6 | 449 | 451 | 452 | 457.0 | 503 | 504 | 506 | 510.9 |
| Lo PR | 130 | 132 | 135 | 140.4 | 138 | 140 | 143 | 148.1 | 145 | 146 | 149 | 154.8 | 150 | 152 | 155 | 160.5 | 156 | 157 | 161 | 166.1 | 163 | 164 | 168 | 173.0 | |
| 900 | MBh | 24.6 | 24.9 | 25.6 | 26.7 | 24.4 | 24.7 | 25.4 | 26.5 | 23.8 | 24.1 | 24.8 | 25.9 | 22.7 | 23.1 | 23.8 | 24.8 | 21.4 | 21.8 | 22.5 | 23.5 | 20.3 | 20.6 | 21.3 | 22.4 |
| | S/T | 1.00 | 1.00 | 0.91 | 0.8 | 1.00 | 1.00 | 0.92 | 0.8 | 1.00 | 1.00 | 0.94 | 0.8 | 1.00 | 1.00 | 0.96 | 0.8 | 1.00 | 1.00 | 1.00 | 0.8 | 1.00 | 1.00 | 1.00 | 0.9 |
| | ΔT | 29.87 | 28.01 | 24.54 | 20.9 | 29.82 | 27.96 | 24.49 | 20.9 | 30.08 | 28.22 | 24.75 | 21.2 | 29.80 | 27.94 | 24.47 | 20.9 | 29.55 | 27.69 | 24.22 | 20.6 | 30.71 | 28.85 | 25.39 | 21.8 |
| | kW | 1.56 | 1.55 | 1.55 | 1.6 | 1.75 | 1.75 | 1.75 | 1.8 | 1.97 | 1.97 | 1.96 | 2.0 | 2.20 | 2.20 | 2.20 | 2.2 | 2.47 | 2.47 | 2.46 | 2.5 | 2.78 | 2.78 | 2.77 | 2.8 |
| | Amps | 6.25 | 6.24 | 6.23 | 6.3 | 7.14 | 7.13 | 7.12 | 7.2 | 8.14 | 8.13 | 8.12 | 8.2 | 9.22 | 9.21 | 9.20 | 9.3 | 10.43 | 10.42 | 10.40 | 10.5 | 11.84 | 11.84 | 11.82 | 11.9 |
| | Hi PR | 269 | 270 | 272 | 276.9 | 311 | 312 | 314 | 318.4 | 354 | 355 | 357 | 361.9 | 401 | 402 | 404 | 408.7 | 452 | 453 | 455 | 459.2 | 505 | 507 | 508 | 513.1 |
| Lo PR | 132 | 134 | 137 | 142.5 | 140 | 142 | 145 | 150.2 | 147 | 148 | 152 | 156.9 | 152 | 154 | 157 | 162.6 | 158 | 160 | 163 | 168.1 | 165 | 167 | 170 | 175.1 | |

IDB: Entering Indoor Dry Bulb Temperature
 High and low pressures are measured at the liquid and suction access fittings.
 Shaded area reflects AHRI (TVA) conditions.
 Amps: Unit amps (comp.+ evaporator + condenser fan motors)
 kW = Total system power

| IDB | Airflow | Outdoor Ambient Temperature | | | | | | | | | | | | | | | | | | | | | | | |
|-------------|---------|-----------------------------|-------|-------|-----|-------|-------|-------|-----|-------|-------|-------|-----|-------|-------|-------|-----|-------|-------|-------|-----|-------|-------|-------|----|
| | | 65 | | | | 75 | | | | 85 | | | | 95 | | | | 105 | | | | 115 | | | |
| | | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 |
| 80 | MBh | 29.1 | 29.5 | 30.4 | - | 28.8 | 29.2 | 30.1 | - | 28.1 | 28.5 | 29.4 | - | 26.8 | 27.2 | 28.0 | - | 25.2 | 25.6 | 26.5 | - | 23.7 | 24.1 | 25.0 | - |
| | S/T | 0.64 | 0.56 | 0.42 | - | 0.65 | 0.57 | 0.43 | - | 0.68 | 0.60 | 0.45 | - | 1.00 | 0.62 | 0.47 | - | 1.00 | 0.64 | 0.50 | - | 1.00 | 0.70 | 0.55 | - |
| | ΔT | 19.98 | 18.13 | 14.68 | - | 19.93 | 18.08 | 14.63 | - | 20.18 | 18.34 | 14.89 | - | 19.91 | 18.06 | 14.61 | - | 19.66 | 17.81 | 14.36 | - | 20.82 | 18.97 | 15.52 | - |
| | kW | 1.95 | 1.95 | 1.95 | - | 2.18 | 2.18 | 2.18 | - | 2.44 | 2.44 | 2.43 | - | 2.71 | 2.71 | 2.71 | - | 3.02 | 3.02 | 3.02 | - | 3.38 | 3.38 | 3.38 | - |
| | Amps | 7.65 | 7.64 | 7.63 | - | 8.70 | 8.69 | 8.67 | - | 9.87 | 9.86 | 9.84 | - | 11.13 | 11.12 | 11.10 | - | 12.54 | 12.53 | 12.52 | - | 14.20 | 14.19 | 14.17 | - |
| | Hi PR | 260 | 261 | 263 | - | 301 | 302 | 304 | - | 344 | 345 | 347 | - | 390 | 391 | 393 | - | 440 | 441 | 443 | - | 493 | 494 | 496 | - |
| Lo PR | 125 | 127 | 130 | - | 133 | 134 | 137 | - | 139 | 141 | 144 | - | 145 | 146 | 150 | - | 150 | 152 | 155 | - | 157 | 159 | 162 | - | |
| 1000 | MBh | 29.5 | 29.9 | 30.8 | - | 29.2 | 29.6 | 30.5 | - | 28.5 | 28.9 | 29.7 | - | 27.2 | 27.6 | 28.4 | - | 25.6 | 26.0 | 26.8 | - | 24.1 | 24.5 | 25.4 | - |
| | S/T | 0.71 | 0.63 | 0.48 | - | 0.71 | 0.63 | 0.49 | - | 0.74 | 0.66 | 0.52 | - | 1.00 | 0.68 | 0.54 | - | 1.00 | 0.70 | 0.56 | - | 1.00 | 0.76 | 0.61 | - |
| | ΔT | 18.86 | 17.01 | 13.56 | - | 18.81 | 16.96 | 13.51 | - | 19.07 | 17.22 | 13.77 | - | 18.79 | 16.94 | 13.49 | - | 18.54 | 16.70 | 13.25 | - | 19.70 | 17.85 | 14.40 | - |
| | kW | 1.97 | 1.96 | 1.96 | - | 2.19 | 2.19 | 2.19 | - | 2.45 | 2.45 | 2.44 | - | 2.72 | 2.72 | 2.72 | - | 3.03 | 3.03 | 3.03 | - | 3.39 | 3.39 | 3.39 | - |
| | Amps | 7.71 | 7.70 | 7.68 | - | 8.75 | 8.75 | 8.73 | - | 9.92 | 9.91 | 9.89 | - | 11.18 | 11.18 | 11.16 | - | 12.60 | 12.59 | 12.57 | - | 14.25 | 14.24 | 14.23 | - |
| | Hi PR | 262 | 263 | 265 | - | 303 | 304 | 306 | - | 346 | 347 | 349 | - | 392 | 393 | 395 | - | 442 | 443 | 445 | - | 495 | 496 | 498 | - |
| Lo PR | 127 | 128 | 132 | - | 134 | 136 | 139 | - | 141 | 143 | 146 | - | 147 | 148 | 151 | - | 152 | 154 | 157 | - | 159 | 161 | 164 | - | |
| 1125 | MBh | 29.9 | 30.3 | 31.2 | - | 29.7 | 30.1 | 31.0 | - | 28.9 | 29.3 | 30.2 | - | 27.6 | 28.0 | 28.9 | - | 26.0 | 26.4 | 27.3 | - | 24.6 | 25.0 | 25.8 | - |
| | S/T | 0.74 | 0.66 | 0.52 | - | 0.75 | 0.67 | 0.53 | - | 0.78 | 0.70 | 0.55 | - | 1.00 | 0.72 | 0.57 | - | 1.00 | 0.74 | 0.60 | - | 1.00 | 0.80 | 0.65 | - |
| | ΔT | 17.92 | 16.07 | 12.62 | - | 17.87 | 16.02 | 12.57 | - | 18.13 | 16.28 | 12.83 | - | 17.85 | 16.00 | 12.55 | - | 17.60 | 15.76 | 12.31 | - | 18.76 | 16.91 | 13.46 | - |
| | kW | 1.98 | 1.97 | 1.97 | - | 2.20 | 2.20 | 2.20 | - | 2.46 | 2.46 | 2.45 | - | 2.73 | 2.73 | 2.73 | - | 3.04 | 3.04 | 3.04 | - | 3.40 | 3.40 | 3.40 | - |
| | Amps | 7.75 | 7.74 | 7.73 | - | 8.80 | 8.79 | 8.77 | - | 9.97 | 9.96 | 9.94 | - | 11.23 | 11.22 | 11.20 | - | 12.64 | 12.63 | 12.62 | - | 14.30 | 14.29 | 14.27 | - |
| | Hi PR | 264 | 265 | 267 | - | 305 | 306 | 308 | - | 348 | 349 | 351 | - | 394 | 395 | 397 | - | 444 | 445 | 447 | - | 497 | 499 | 500 | - |
| Lo PR | 129 | 130 | 134 | - | 136 | 138 | 141 | - | 143 | 145 | 148 | - | 149 | 150 | 153 | - | 154 | 156 | 159 | - | 161 | 163 | 166 | - | |

| | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| 85 | MBh | 29.1 | 29.5 | 30.4 | 31.7 | 28.9 | 29.3 | 30.1 | 31.5 | 28.1 | 28.5 | 29.4 | 30.7 | 26.8 | 27.2 | 28.1 | 29.4 | 25.2 | 25.6 | 26.5 | 27.8 | 23.7 | 24.1 | 25.0 | 26.3 |
| | S/T | 0.78 | 0.70 | 0.56 | 0.4 | 0.79 | 0.71 | 0.56 | 0.4 | 1.00 | 0.73 | 0.59 | 0.4 | 1.00 | 0.75 | 0.61 | 0.5 | 1.00 | 0.78 | 0.63 | 0.5 | 1.00 | 1.00 | 0.69 | 0.5 |
| | ΔT | 24.04 | 22.19 | 18.74 | 15.2 | 23.99 | 22.14 | 18.69 | 15.1 | 24.25 | 22.40 | 18.95 | 15.4 | 23.97 | 22.12 | 18.67 | 15.1 | 23.72 | 21.87 | 18.42 | 14.9 | 24.88 | 23.03 | 19.58 | 16.0 |
| | kW | 1.95 | 1.95 | 1.95 | 2.0 | 2.18 | 2.18 | 2.17 | 2.2 | 2.44 | 2.43 | 2.43 | 2.4 | 2.71 | 2.71 | 2.71 | 2.7 | 3.02 | 3.02 | 3.01 | 3.0 | 3.38 | 3.38 | 3.38 | 3.4 |
| | Amps | 7.65 | 7.64 | 7.62 | 7.7 | 8.69 | 8.68 | 8.67 | 8.7 | 9.86 | 9.85 | 9.83 | 9.9 | 11.12 | 11.11 | 11.10 | 11.2 | 12.53 | 12.53 | 12.51 | 12.6 | 14.19 | 14.18 | 14.16 | 14.2 |
| | Hi PR | 260 | 261 | 263 | 267.5 | 301 | 302 | 304 | 308.5 | 344 | 345 | 347 | 351.5 | 390 | 391 | 393 | 397.7 | 440 | 441 | 443 | 447.6 | 493 | 494 | 496 | 500.8 |
| Lo PR | 125 | 127 | 130 | 135.0 | 133 | 134 | 137 | 142.6 | 139 | 141 | 144 | 149.3 | 145 | 146 | 150 | 154.9 | 150 | 152 | 155 | 160.5 | 157 | 159 | 162 | 167.4 | |
| 1000 | MBh | 29.5 | 29.9 | 30.8 | 32.1 | 29.2 | 29.6 | 30.5 | 31.8 | 28.5 | 28.9 | 29.8 | 31.1 | 27.2 | 27.6 | 28.4 | 29.8 | 25.6 | 26.0 | 26.9 | 28.2 | 24.1 | 24.5 | 25.4 | 26.7 |
| | S/T | 0.85 | 0.76 | 0.62 | 0.5 | 1.00 | 0.77 | 0.63 | 0.5 | 1.00 | 0.80 | 0.65 | 0.5 | 1.00 | 0.82 | 0.67 | 0.5 | 1.00 | 0.84 | 0.70 | 0.5 | 1.00 | 1.00 | 0.75 | 0.6 |
| | ΔT | 22.92 | 21.07 | 17.62 | 14.1 | 22.87 | 21.02 | 17.57 | 14.0 | 23.13 | 21.28 | 17.83 | 14.3 | 22.85 | 21.00 | 17.56 | 14.0 | 22.61 | 20.76 | 17.31 | 13.7 | 23.76 | 21.91 | 18.47 | 14.9 |
| | kW | 1.96 | 1.96 | 1.96 | 2.0 | 2.19 | 2.19 | 2.19 | 2.2 | 2.45 | 2.45 | 2.44 | 2.5 | 2.72 | 2.72 | 2.72 | 2.7 | 3.03 | 3.03 | 3.03 | 3.0 | 3.39 | 3.39 | 3.39 | 3.4 |
| | Amps | 7.70 | 7.69 | 7.67 | 7.8 | 8.75 | 8.74 | 8.72 | 8.8 | 9.91 | 9.91 | 9.89 | 10.0 | 11.18 | 11.17 | 11.15 | 11.2 | 12.59 | 12.58 | 12.56 | 12.6 | 14.24 | 14.24 | 14.22 | 14.3 |
| | Hi PR | 262 | 263 | 265 | 269.7 | 303 | 304 | 306 | 310.7 | 346 | 347 | 349 | 353.7 | 392 | 394 | 395 | 399.9 | 442 | 443 | 445 | 449.8 | 496 | 497 | 498 | 503.0 |
| Lo PR | 127 | 128 | 132 | 136.9 | 134 | 136 | 139 | 144.5 | 141 | 143 | 146 | 151.1 | 147 | 148 | 151 | 156.8 | 152 | 154 | 157 | 162.3 | 159 | 161 | 164 | 169.2 | |
| 1125 | MBh | 30.0 | 30.4 | 31.2 | 32.6 | 29.7 | 30.1 | 31.0 | 32.3 | 28.9 | 29.3 | 30.2 | 31.5 | 27.6 | 28.0 | 28.9 | 30.2 | 26.0 | 26.4 | 27.3 | 28.6 | 24.6 | 25.0 | 25.9 | 27.2 |
| | S/T | 0.88 | 0.80 | 0.66 | 0.5 | 1.00 | 0.81 | 0.66 | 0.5 | 1.00 | 0.83 | 0.69 | 0.5 | 1.00 | 0.85 | 0.71 | 0.6 | 1.00 | 1.00 | 0.73 | 0.6 | 1.00 | 1.00 | 0.79 | 0.6 |
| | ΔT | 21.98 | 20.13 | 16.69 | 13.1 | 21.93 | 20.08 | 16.63 | 13.1 | 22.19 | 20.34 | 16.89 | 13.3 | 21.91 | 20.07 | 16.62 | 13.0 | 21.67 | 19.82 | 16.37 | 12.8 | 22.82 | 20.97 | 17.53 | 14.0 |
| | kW | 1.97 | 1.97 | 1.97 | 2.0 | 2.20 | 2.20 | 2.20 | 2.2 | 2.46 | 2.46 | 2.45 | 2.5 | 2.73 | 2.73 | 2.73 | 2.7 | 3.04 | 3.04 | 3.04 | 3.1 | 3.40 | 3.40 | 3.40 | 3.4 |
| | Amps | 7.75 | 7.74 | 7.72 | 7.8 | 8.79 | 8.78 | 8.77 | 8.8 | 9.96 | 9.95 | 9.93 | 10.0 | 11.22 | 11.21 | 11.20 | 11.3 | 12.63 | 12.63 | 12.61 | 12.7 | 14.29 | 14.28 | 14.26 | 14.3 |
| | Hi PR | 264 | 266 | 267 | 271.9 | 305 | 307 | 308 | 312.9 | 348 | 349 | 351 | 355.8 | 395 | 396 | 398 | 402.1 | 444 | 446 | 447 | 451.9 | 498 | 499 | 501 | 505.1 |
| Lo PR | 129 | 130 | 134 | 138.9 | 136 | 138 | 141 | 146.5 | 143 | 145 | 148 | 153.2 | 149 | 150 | 153 | 158.8 | 154 | 156 | 159 | 164.3 | 161 | 163 | 166 | 171.2 | |

IDB: Entering Indoor Dry Bulb Temperature
 High and low pressures are measured at the liquid and suction access fittings.
 Shaded area reflects ACCA (TVA) conditions.
 Amps: Unit amps (comp. + evaporator + condenser fan motors)
 kW = Total system power

| IDB | Airflow | Outdoor Ambient Temperature | | | | | | | | | | | | | | | | | | | | | | | |
|-------------|---------|-----------------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|--------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| | | 65 | | | | 75 | | | | 85 | | | | 95 | | | | 105 | | | | 115 | | | |
| | | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 |
| 80 | MBh | 29.3 | 29.7 | 30.5 | 31.9 | 29.0 | 29.4 | 30.3 | 31.6 | 28.2 | 28.7 | 29.5 | 30.9 | 26.9 | 27.3 | 28.2 | 29.5 | 25.3 | 25.8 | 26.6 | 27.9 | 23.9 | 24.3 | 25.2 | 26.5 |
| | S/T | 1.00 | 0.83 | 0.69 | 0.5 | 1.00 | 0.84 | 0.70 | 0.5 | 1.00 | 0.87 | 0.72 | 0.6 | 1.00 | 1.00 | 0.74 | 0.6 | 1.00 | 1.00 | 0.77 | 0.6 | 1.00 | 1.00 | 0.82 | 0.7 |
| | ΔT | 28.13 | 26.28 | 22.83 | 19.3 | 28.08 | 26.23 | 22.78 | 19.2 | 28.34 | 26.49 | 23.04 | 19.5 | 28.06 | 26.21 | 22.76 | 19.2 | 27.81 | 25.96 | 22.51 | 18.9 | 28.97 | 27.12 | 23.67 | 20.1 |
| | kW | 1.95 | 1.95 | 1.95 | 2.0 | 2.18 | 2.18 | 2.18 | 2.2 | 2.44 | 2.43 | 2.43 | 2.4 | 2.71 | 2.71 | 2.71 | 2.7 | 3.02 | 3.02 | 3.02 | 3.0 | 3.38 | 3.38 | 3.38 | 3.4 |
| | Amps | 7.65 | 7.64 | 7.63 | 7.7 | 8.70 | 8.69 | 8.67 | 8.8 | 9.87 | 9.86 | 9.84 | 9.9 | 11.13 | 11.12 | 11.10 | 11.2 | 12.54 | 12.53 | 12.51 | 12.6 | 14.20 | 14.19 | 14.17 | 14.3 |
| 80 | Hi PR | 261 | 262 | 263 | 268.0 | 302 | 303 | 304 | 309.0 | 344 | 346 | 347 | 351.9 | 391 | 392 | 394 | 398.2 | 441 | 442 | 444 | 448.1 | 494 | 495 | 497 | 501.3 |
| | Lo PR | 126 | 127 | 130 | 135.6 | 133 | 135 | 138 | 143.2 | 140 | 141 | 145 | 149.9 | 145 | 147 | 150 | 155.5 | 151 | 153 | 156 | 161.0 | 158 | 159 | 163 | 167.9 |
| | MBh | 29.6 | 30.1 | 30.9 | 32.3 | 29.4 | 29.8 | 30.7 | 32.0 | 28.6 | 29.0 | 29.9 | 31.2 | 27.3 | 27.7 | 28.6 | 29.9 | 25.7 | 26.1 | 27.0 | 28.3 | 24.3 | 24.7 | 25.5 | 26.9 |
| | S/T | 1.00 | 0.90 | 0.75 | 0.6 | 1.00 | 0.90 | 0.76 | 0.6 | 1.00 | 0.93 | 0.79 | 0.6 | 1.00 | 1.00 | 0.81 | 0.7 | 1.00 | 1.00 | 0.83 | 0.7 | 1.00 | 1.00 | 0.89 | 0.7 |
| | ΔT | 27.01 | 25.16 | 21.71 | 18.1 | 26.96 | 25.11 | 21.66 | 18.1 | 27.22 | 25.37 | 21.92 | 18.3 | 26.94 | 25.09 | 21.64 | 18.1 | 26.69 | 24.85 | 21.40 | 17.8 | 27.85 | 26.00 | 22.55 | 19.0 |
| 1125 | kW | 1.96 | 1.96 | 1.96 | 2.0 | 2.19 | 2.19 | 2.19 | 2.2 | 2.45 | 2.45 | 2.44 | 2.5 | 2.72 | 2.72 | 2.72 | 2.7 | 3.03 | 3.03 | 3.03 | 3.0 | 3.39 | 3.39 | 3.39 | 3.4 |
| | Amps | 7.71 | 7.70 | 7.68 | 7.8 | 8.75 | 8.74 | 8.73 | 8.8 | 9.92 | 9.91 | 9.89 | 10.0 | 11.18 | 11.17 | 11.16 | 11.2 | 12.59 | 12.59 | 12.57 | 12.6 | 14.25 | 14.24 | 14.22 | 14.3 |
| | Hi PR | 263 | 264 | 266 | 270.2 | 304 | 305 | 307 | 311.2 | 347 | 348 | 350 | 354.1 | 393 | 394 | 396 | 400.4 | 443 | 444 | 446 | 450.3 | 496 | 497 | 499 | 503.5 |
| | Lo PR | 127 | 129 | 132 | 137.4 | 135 | 137 | 140 | 145.0 | 142 | 143 | 146 | 151.7 | 147 | 149 | 152 | 157.3 | 153 | 154 | 158 | 162.8 | 160 | 161 | 164 | 169.8 |
| | MBh | 30.1 | 30.5 | 31.4 | 32.7 | 29.8 | 30.3 | 31.1 | 32.5 | 29.1 | 29.5 | 30.4 | 31.7 | 27.8 | 28.2 | 29.1 | 30.4 | 26.2 | 26.6 | 27.5 | 28.8 | 24.7 | 25.1 | 26.0 | 27.3 |
| 1125 | S/T | 1.00 | 0.93 | 0.79 | 0.6 | 1.00 | 0.94 | 0.80 | 0.6 | 1.00 | 0.97 | 0.82 | 0.7 | 1.00 | 1.00 | 0.84 | 0.7 | 1.00 | 1.00 | 0.87 | 0.7 | 1.00 | 1.00 | 0.92 | 0.8 |
| | ΔT | 26.07 | 24.22 | 20.77 | 17.2 | 26.02 | 24.17 | 20.72 | 17.2 | 26.28 | 24.43 | 20.98 | 17.4 | 26.00 | 24.15 | 20.71 | 17.1 | 25.76 | 23.91 | 20.46 | 16.9 | 26.91 | 25.06 | 21.62 | 18.0 |
| | kW | 1.97 | 1.97 | 1.97 | 2.0 | 2.20 | 2.20 | 2.20 | 2.2 | 2.46 | 2.46 | 2.45 | 2.5 | 2.73 | 2.73 | 2.73 | 2.7 | 3.04 | 3.04 | 3.04 | 3.1 | 3.40 | 3.40 | 3.40 | 3.4 |
| | Amps | 7.75 | 7.74 | 7.73 | 7.8 | 8.80 | 8.79 | 8.77 | 8.9 | 9.96 | 9.96 | 9.94 | 10.0 | 11.23 | 11.22 | 11.20 | 11.3 | 12.64 | 12.63 | 12.61 | 12.7 | 14.30 | 14.29 | 14.27 | 14.3 |
| | Hi PR | 265 | 266 | 268 | 272.3 | 306 | 307 | 309 | 313.3 | 349 | 350 | 352 | 356.3 | 395 | 396 | 398 | 402.5 | 445 | 446 | 448 | 452.4 | 498 | 499 | 501 | 505.6 |
| Lo PR | 129 | 131 | 134 | 139.5 | 137 | 139 | 142 | 147.1 | 144 | 145 | 148 | 153.7 | 149 | 151 | 154 | 159.4 | 155 | 156 | 160 | 164.9 | 162 | 163 | 166 | 171.8 | |

| | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| 875 | MBh | 29.8 | 30.2 | 31.0 | 32.4 | 29.5 | 29.9 | 30.8 | 32.1 | 28.7 | 29.1 | 30.0 | 31.3 | 27.4 | 27.8 | 28.7 | 30.0 | 25.8 | 26.2 | 27.1 | 28.4 | 24.4 | 24.8 | 25.7 | 27.0 |
| | S/T | 1.00 | 0.94 | 0.80 | 0.6 | 1.00 | 1.00 | 0.80 | 0.7 | 1.00 | 1.00 | 0.83 | 0.7 | 1.00 | 1.00 | 0.85 | 0.7 | 1.00 | 1.00 | 0.87 | 0.7 | 1.00 | 1.00 | 1.00 | 0.8 |
| | ΔT | 31.75 | 29.91 | 26.46 | 22.9 | 31.70 | 29.86 | 26.41 | 22.8 | 31.96 | 30.12 | 26.67 | 23.1 | 31.68 | 29.84 | 26.39 | 22.8 | 31.44 | 29.59 | 26.14 | 22.6 | 32.59 | 30.75 | 27.30 | 23.7 |
| | kW | 1.96 | 1.96 | 1.95 | 2.0 | 2.19 | 2.18 | 2.18 | 2.2 | 2.44 | 2.44 | 2.44 | 2.5 | 2.72 | 2.72 | 2.71 | 2.7 | 3.03 | 3.02 | 3.02 | 3.0 | 3.39 | 3.39 | 3.38 | 3.4 |
| | Amps | 7.67 | 7.66 | 7.65 | 7.7 | 8.72 | 8.71 | 8.69 | 8.8 | 9.89 | 9.88 | 9.86 | 9.9 | 11.15 | 11.14 | 11.12 | 11.2 | 12.56 | 12.55 | 12.53 | 12.6 | 14.22 | 14.21 | 14.19 | 14.3 |
| 85 | Hi PR | 262 | 263 | 265 | 269.2 | 303 | 304 | 306 | 310.2 | 346 | 347 | 349 | 353.2 | 392 | 393 | 395 | 399.4 | 442 | 443 | 445 | 449.3 | 495 | 496 | 498 | 502.5 |
| | Lo PR | 127 | 129 | 132 | 137.5 | 135 | 137 | 140 | 145.1 | 142 | 143 | 146 | 151.7 | 147 | 149 | 152 | 157.4 | 153 | 154 | 158 | 162.9 | 160 | 161 | 164 | 169.8 |
| | MBh | 30.1 | 30.5 | 31.4 | 32.7 | 29.9 | 30.3 | 31.2 | 32.5 | 29.1 | 29.5 | 30.4 | 31.7 | 27.8 | 28.2 | 29.1 | 30.4 | 26.2 | 26.6 | 27.5 | 28.8 | 24.8 | 25.2 | 26.0 | 27.4 |
| | S/T | 1.00 | 1.00 | 0.86 | 0.7 | 1.00 | 1.00 | 0.87 | 0.7 | 1.00 | 1.00 | 0.89 | 0.7 | 1.00 | 1.00 | 0.91 | 0.8 | 1.00 | 1.00 | 1.00 | 0.8 | 1.00 | 1.00 | 1.00 | 0.8 |
| | ΔT | 30.64 | 28.79 | 25.34 | 21.8 | 30.59 | 28.74 | 25.29 | 21.7 | 30.85 | 29.00 | 25.55 | 22.0 | 30.57 | 28.72 | 25.27 | 21.7 | 30.32 | 28.47 | 25.02 | 21.5 | 31.48 | 29.63 | 26.18 | 22.6 |
| 1125 | kW | 1.97 | 1.97 | 1.96 | 2.0 | 2.20 | 2.20 | 2.19 | 2.2 | 2.45 | 2.45 | 2.45 | 2.5 | 2.73 | 2.73 | 2.72 | 2.7 | 3.04 | 3.04 | 3.04 | 3.0 | 3.40 | 3.40 | 3.39 | 3.4 |
| | Amps | 7.73 | 7.72 | 7.70 | 7.8 | 8.77 | 8.76 | 8.75 | 8.8 | 9.94 | 9.93 | 9.91 | 10.0 | 11.20 | 11.19 | 11.18 | 11.3 | 12.61 | 12.61 | 12.59 | 12.7 | 14.27 | 14.26 | 14.24 | 14.3 |
| | Hi PR | 264 | 265 | 267 | 271.4 | 305 | 306 | 308 | 312.4 | 348 | 349 | 351 | 355.4 | 394 | 395 | 397 | 401.6 | 444 | 445 | 447 | 451.5 | 497 | 498 | 500 | 504.7 |
| | Lo PR | 129 | 131 | 134 | 139.3 | 137 | 138 | 142 | 146.9 | 144 | 145 | 148 | 153.6 | 149 | 151 | 154 | 159.2 | 155 | 156 | 159 | 164.7 | 162 | 163 | 166 | 171.6 |
| | MBh | 30.6 | 31.0 | 31.9 | 33.2 | 30.3 | 30.7 | 31.6 | 32.9 | 29.6 | 30.0 | 30.9 | 32.2 | 28.3 | 28.7 | 29.5 | 30.9 | 26.7 | 27.1 | 28.0 | 29.3 | 25.2 | 25.6 | 26.5 | 27.8 |
| 1125 | S/T | 1.00 | 1.00 | 0.90 | 0.7 | 1.00 | 1.00 | 0.90 | 0.8 | 1.00 | 1.00 | 0.93 | 0.8 | 1.00 | 1.00 | 0.95 | 0.8 | 1.00 | 1.00 | 1.00 | 0.8 | 1.00 | 1.00 | 1.00 | 0.9 |
| | ΔT | 29.70 | 27.85 | 24.40 | 20.8 | 29.65 | 27.80 | 24.35 | 20.8 | 29.91 | 28.06 | 24.61 | 21.0 | 29.63 | 27.78 | 24.33 | 20.8 | 29.38 | 27.53 | 24.09 | 20.5 | 30.54 | 28.69 | 25.24 | 21.7 |
| | kW | 1.98 | 1.98 | 1.97 | 2.0 | 2.21 | 2.21 | 2.20 | 2.2 | 2.46 | 2.46 | 2.46 | 2.5 | 2.74 | 2.74 | 2.73 | 2.8 | 3.05 | 3.05 | 3.04 | 3.1 | 3.41 | 3.41 | 3.40 | 3.4 |
| | Amps | 7.77 | 7.76 | 7.75 | 7.8 | 8.82 | 8.81 | 8.79 | 8.9 | 9.98 | 9.98 | 9.96 | 10.0 | 11.25 | 11.24 | 11.22 | 11.3 | 12.66 | 12.65 | 12.63 | 12.7 | 14.32 | 14.31 | 14.29 | 14.4 |
| | Hi PR | 266 | 267 | 269 | 273.6 | 307 | 308 | 310 | 314.6 | 350 | 351 | 353 | 357.5 | 396 | 397 | 399 | 403.8 | 446 | 447 | 449 | 453.6 | 499 | 500 | 502 | 506.8 |
| Lo PR | 131 | 133 | 136 | 141.3 | 139 | 140 | 144 | 148.9 | 146 | 147 | 150 | 155.6 | 151 | 153 | 156 | 161.2 | 157 | 158 | 161 | 166.8 | 164 | 165 | 168 | 173.7 | |

IDB: Entering Indoor Dry Bulb Temperature
 High and low pressures are measured at the liquid and suction access fittings.
 Shaded area reflects AHRI (TVA) conditions.
 Amps: Unit amps (comp.+ evaporator + condenser fan motors)
 kW = Total system power

| IDB | Airflow | Outdoor Ambient Temperature | | | | | | | | | | | | | | | | | | | | | | | | |
|-------|---------|-----------------------------|-------|-------|-------|-----|-------|-------|-------|-----|-------|-------|-------|-----|-------|-------|-------|-----|-------|-------|-------|-----|-------|-------|-------|---|
| | | 65 | | | | 75 | | | | 85 | | | | 95 | | | | 105 | | | | 115 | | | | |
| | | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | |
| 70 | 1050 | MBh | 34.9 | 35.4 | 36.5 | - | 34.6 | 35.1 | 36.1 | - | 33.7 | 34.2 | 35.2 | - | 32.1 | 32.6 | 33.7 | - | 30.2 | 30.7 | 31.8 | - | 28.5 | 29.0 | 30.0 | - |
| | | S/T | 0.68 | 0.60 | 0.45 | - | 0.69 | 0.60 | 0.46 | - | 0.71 | 0.63 | 0.48 | - | 1.00 | 0.65 | 0.51 | - | 1.00 | 0.68 | 0.53 | - | 1.00 | 0.73 | 0.59 | - |
| | | ΔT | 19.90 | 18.03 | 14.53 | - | 19.85 | 17.97 | 14.47 | - | 20.11 | 18.24 | 14.74 | - | 19.83 | 17.96 | 14.46 | - | 19.58 | 17.71 | 14.21 | - | 20.75 | 18.88 | 15.38 | - |
| | | kW | 2.35 | 2.35 | 2.34 | - | 2.62 | 2.62 | 2.61 | - | 2.92 | 2.92 | 2.91 | - | 3.25 | 3.25 | 3.24 | - | 3.61 | 3.61 | 3.61 | - | 4.04 | 4.04 | 4.04 | - |
| | | Amps | 8.96 | 8.95 | 8.93 | - | 10.20 | 10.19 | 10.17 | - | 11.58 | 11.57 | 11.55 | - | 13.08 | 13.07 | 13.05 | - | 14.75 | 14.74 | 14.72 | - | 16.71 | 16.70 | 16.68 | - |
| | | Hi PR | 262 | 264 | 265 | - | 304 | 305 | 307 | - | 347 | 348 | 350 | - | 394 | 395 | 397 | - | 444 | 445 | 447 | - | 497 | 499 | 500 | - |
| Lo PR | 126 | 128 | 131 | - | 134 | 136 | 139 | - | 141 | 142 | 145 | - | 146 | 148 | 151 | - | 152 | 153 | 157 | - | 159 | 160 | 164 | - | | |
| 70 | 1150 | MBh | 35.3 | 35.7 | 36.8 | - | 34.9 | 35.4 | 36.5 | - | 34.0 | 34.5 | 35.6 | - | 32.5 | 33.0 | 34.0 | - | 30.6 | 31.0 | 32.1 | - | 28.8 | 29.3 | 30.3 | - |
| | | S/T | 0.72 | 0.64 | 0.49 | - | 0.73 | 0.65 | 0.50 | - | 0.76 | 0.67 | 0.53 | - | 1.00 | 0.69 | 0.55 | - | 1.00 | 0.72 | 0.57 | - | 1.00 | 0.77 | 0.63 | - |
| | | ΔT | 19.14 | 17.26 | 13.76 | - | 19.09 | 17.21 | 13.71 | - | 19.35 | 17.48 | 13.98 | - | 19.07 | 17.19 | 13.69 | - | 18.82 | 16.94 | 13.44 | - | 19.99 | 18.12 | 14.62 | - |
| | | kW | 2.36 | 2.36 | 2.35 | - | 2.63 | 2.63 | 2.62 | - | 2.93 | 2.93 | 2.92 | - | 3.26 | 3.26 | 3.25 | - | 3.62 | 3.62 | 3.62 | - | 4.05 | 4.05 | 4.05 | - |
| | | Amps | 9.00 | 8.99 | 8.97 | - | 10.24 | 10.23 | 10.21 | - | 11.62 | 11.61 | 11.59 | - | 13.12 | 13.11 | 13.09 | - | 14.79 | 14.78 | 14.76 | - | 16.76 | 16.75 | 16.73 | - |
| | | Hi PR | 264 | 265 | 267 | - | 305 | 306 | 308 | - | 349 | 350 | 351 | - | 395 | 396 | 398 | - | 445 | 446 | 448 | - | 499 | 500 | 502 | - |
| Lo PR | 128 | 129 | 132 | - | 135 | 137 | 140 | - | 142 | 144 | 147 | - | 148 | 149 | 152 | - | 153 | 155 | 158 | - | 160 | 162 | 165 | - | | |
| 70 | 1350 | MBh | 36.0 | 36.5 | 37.6 | - | 35.7 | 36.2 | 37.3 | - | 34.8 | 35.3 | 36.4 | - | 33.3 | 33.8 | 34.8 | - | 31.4 | 31.8 | 32.9 | - | 29.6 | 30.1 | 31.1 | - |
| | | S/T | 0.77 | 0.68 | 0.54 | - | 0.77 | 0.69 | 0.54 | - | 1.00 | 0.72 | 0.57 | - | 1.00 | 0.74 | 0.59 | - | 1.00 | 0.76 | 0.62 | - | 1.00 | 1.00 | 0.67 | - |
| | | ΔT | 17.84 | 15.97 | 12.47 | - | 17.79 | 15.92 | 12.42 | - | 18.06 | 16.18 | 12.68 | - | 17.77 | 15.90 | 12.40 | - | 17.52 | 15.65 | 12.15 | - | 18.70 | 16.82 | 13.32 | - |
| | | kW | 2.37 | 2.37 | 2.37 | - | 2.64 | 2.64 | 2.64 | - | 2.95 | 2.94 | 2.94 | - | 3.27 | 3.27 | 3.27 | - | 3.64 | 3.64 | 3.63 | - | 4.07 | 4.07 | 4.06 | - |
| | | Amps | 9.07 | 9.06 | 9.04 | - | 10.31 | 10.30 | 10.28 | - | 11.70 | 11.69 | 11.67 | - | 13.19 | 13.18 | 13.16 | - | 14.87 | 14.86 | 14.84 | - | 16.83 | 16.82 | 16.80 | - |
| | | Hi PR | 267 | 268 | 270 | - | 308 | 309 | 311 | - | 352 | 353 | 354 | - | 398 | 399 | 401 | - | 448 | 449 | 451 | - | 502 | 503 | 505 | - |
| Lo PR | 131 | 132 | 135 | - | 138 | 140 | 143 | - | 145 | 146 | 150 | - | 151 | 152 | 155 | - | 156 | 158 | 161 | - | 163 | 165 | 168 | - | | |

| | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------|------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| 75 | 1050 | MBh | 34.9 | 35.4 | 36.5 | 38.1 | 34.6 | 35.1 | 36.2 | 37.8 | 33.7 | 34.2 | 35.3 | 36.8 | 32.2 | 32.7 | 33.7 | 35.3 | 30.3 | 30.7 | 31.8 | 33.4 | 28.5 | 29.0 | 30.0 | 31.6 |
| | | S/T | 0.82 | 0.74 | 0.59 | 0.4 | 1.00 | 0.74 | 0.60 | 0.4 | 1.00 | 0.77 | 0.62 | 0.5 | 1.00 | 0.79 | 0.65 | 0.5 | 1.00 | 0.82 | 0.67 | 0.5 | 1.00 | 1.00 | 0.73 | 0.6 |
| | | ΔT | 24.02 | 22.15 | 18.65 | 15.0 | 23.97 | 22.10 | 18.60 | 15.0 | 24.23 | 22.36 | 18.86 | 15.2 | 23.95 | 22.08 | 18.58 | 15.0 | 23.70 | 21.83 | 18.33 | 14.7 | 24.88 | 23.00 | 19.50 | 15.9 |
| | | kW | 2.35 | 2.34 | 2.34 | 2.4 | 2.62 | 2.62 | 2.61 | 2.6 | 2.92 | 2.92 | 2.91 | 2.9 | 3.25 | 3.24 | 3.24 | 3.3 | 3.61 | 3.61 | 3.61 | 3.6 | 4.04 | 4.04 | 4.03 | 4.1 |
| | | Amps | 8.95 | 8.94 | 8.92 | 9.0 | 10.19 | 10.18 | 10.16 | 10.3 | 11.57 | 11.56 | 11.54 | 11.6 | 13.07 | 13.06 | 13.04 | 13.1 | 14.74 | 14.73 | 14.71 | 14.8 | 16.71 | 16.70 | 16.67 | 16.8 |
| | | Hi PR | 263 | 264 | 266 | 270.2 | 304 | 305 | 307 | 311.5 | 347 | 348 | 350 | 354.7 | 394 | 395 | 397 | 401.3 | 444 | 445 | 447 | 451.6 | 498 | 499 | 501 | 505.2 |
| Lo PR | 126 | 128 | 131 | 136.4 | 134 | 136 | 139 | 144.1 | 141 | 142 | 145 | 150.8 | 146 | 148 | 151 | 156.5 | 152 | 153 | 157 | 162.0 | 159 | 160 | 164 | 169.0 | | |
| 75 | 1150 | MBh | 35.3 | 35.8 | 36.8 | 38.4 | 35.0 | 35.5 | 36.5 | 38.1 | 34.1 | 34.5 | 35.6 | 37.2 | 32.5 | 33.0 | 34.0 | 35.6 | 30.6 | 31.1 | 32.1 | 33.7 | 28.8 | 29.3 | 30.4 | 32.0 |
| | | S/T | 0.86 | 0.78 | 0.63 | 0.5 | 1.00 | 0.79 | 0.64 | 0.5 | 1.00 | 0.81 | 0.67 | 0.5 | 1.00 | 0.83 | 0.69 | 0.5 | 1.00 | 1.00 | 0.71 | 0.6 | 1.00 | 1.00 | 0.77 | 0.6 |
| | | ΔT | 23.26 | 21.38 | 17.88 | 14.3 | 23.21 | 21.33 | 17.83 | 14.2 | 23.47 | 21.60 | 18.10 | 14.5 | 23.19 | 21.31 | 17.81 | 14.2 | 22.94 | 21.06 | 17.56 | 13.9 | 24.11 | 22.24 | 18.74 | 15.1 |
| | | kW | 2.36 | 2.35 | 2.35 | 2.4 | 2.63 | 2.62 | 2.62 | 2.6 | 2.93 | 2.93 | 2.92 | 2.9 | 3.26 | 3.25 | 3.25 | 3.3 | 3.62 | 3.62 | 3.62 | 3.6 | 4.05 | 4.05 | 4.04 | 4.1 |
| | | Amps | 8.99 | 8.98 | 8.96 | 9.1 | 10.23 | 10.22 | 10.20 | 10.3 | 11.62 | 11.61 | 11.58 | 11.7 | 13.11 | 13.10 | 13.08 | 13.2 | 14.79 | 14.78 | 14.76 | 14.9 | 16.75 | 16.74 | 16.72 | 16.8 |
| | | Hi PR | 264 | 265 | 267 | 271.7 | 305 | 307 | 308 | 313.0 | 349 | 350 | 352 | 356.3 | 395 | 396 | 398 | 402.9 | 446 | 447 | 449 | 453.1 | 499 | 500 | 502 | 506.7 |
| Lo PR | 128 | 129 | 132 | 137.7 | 135 | 137 | 140 | 145.4 | 142 | 144 | 147 | 152.1 | 148 | 149 | 152 | 157.8 | 153 | 155 | 158 | 163.3 | 160 | 162 | 165 | 170.3 | | |
| 75 | 1350 | MBh | 36.1 | 36.6 | 37.6 | 39.2 | 35.8 | 36.2 | 37.3 | 38.9 | 34.8 | 35.3 | 36.4 | 38.0 | 33.3 | 33.8 | 34.8 | 36.4 | 31.4 | 31.9 | 32.9 | 34.5 | 29.6 | 30.1 | 31.2 | 32.7 |
| | | S/T | 0.91 | 0.82 | 0.68 | 0.5 | 1.00 | 0.83 | 0.68 | 0.5 | 1.00 | 0.86 | 0.71 | 0.6 | 1.00 | 0.88 | 0.73 | 0.6 | 1.00 | 1.00 | 0.76 | 0.6 | 1.00 | 1.00 | 0.81 | 0.7 |
| | | ΔT | 21.97 | 20.09 | 16.59 | 13.0 | 21.91 | 20.04 | 16.54 | 12.9 | 22.18 | 20.30 | 16.80 | 13.2 | 21.89 | 20.02 | 16.52 | 12.9 | 21.64 | 19.77 | 16.27 | 12.6 | 22.82 | 20.94 | 17.44 | 13.8 |
| | | kW | 2.37 | 2.37 | 2.36 | 2.4 | 2.64 | 2.64 | 2.64 | 2.7 | 2.94 | 2.94 | 2.94 | 3.0 | 3.27 | 3.27 | 3.27 | 3.3 | 3.64 | 3.64 | 3.63 | 3.7 | 4.07 | 4.06 | 4.06 | 4.1 |
| | | Amps | 9.07 | 9.06 | 9.03 | 9.1 | 10.30 | 10.30 | 10.27 | 10.4 | 11.69 | 11.68 | 11.66 | 11.8 | 13.19 | 13.18 | 13.16 | 13.3 | 14.86 | 14.85 | 14.83 | 14.9 | 16.82 | 16.81 | 16.79 | 16.9 |
| | | Hi PR | 267 | 268 | 270 | 274.7 | 308 | 310 | 311 | 316.0 | 352 | 353 | 355 | 359.3 | 398 | 399 | 401 | 405.9 | 449 | 450 | 452 | 456.1 | 502 | 503 | 505 | 509.7 |
| Lo PR | 131 | 132 | 135 | 140.7 | 138 | 140 | 143 | 148.3 | 145 | 146 | 150 | 155.0 | 151 | 152 | 155 | 160.7 | 156 | 158 | 161 | 166.2 | 163 | 165 | 168 | 173.2 | | |

IDB: Entering Indoor Dry Bulb Temperature
 High and low pressures are measured at the liquid and suction access fittings.
 Shaded area reflects ACCA (TVA) conditions.
 Amps: Unit amps (comp.+ evaporator + condenser fan motors)
 kW = Total system power

| IDB | Airflow | 65 | | | | | | | | | | | | 75 | | | | | | | | | | | | 85 | | | | | | | | | | | | 95 | | | | | | | | | | | | 105 | | | | | | | | | | | | 115 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-----|---------|--------------------------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|--------------------------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|--------------------------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|--------------------------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|--------------------------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|--------------------------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|------|-------|-------|-------|------|-------|-------|-------|------|-------|-------|-------|------|-------|-------|-------|------|-------|-------|-------|------|
| | | 59 | | | | 63 | | | | 67 | | | | 71 | | | | 59 | | | | 63 | | | | 67 | | | | 71 | | | | 59 | | | | 63 | | | | 67 | | | | 71 | | | | 59 | | | | 63 | | | | 67 | | | | 71 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | Entering Indoor Wet Bulb Temperature | | | | | | | | | | | | Entering Indoor Wet Bulb Temperature | | | | | | | | | | | | Entering Indoor Wet Bulb Temperature | | | | | | | | | | | | Entering Indoor Wet Bulb Temperature | | | | | | | | | | | | Entering Indoor Wet Bulb Temperature | | | | | | | | | | | | Entering Indoor Wet Bulb Temperature | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 80 | 1050 | MBh | 35.1 | 35.6 | 36.7 | 38.2 | 34.8 | 35.3 | 36.3 | 37.9 | 33.9 | 34.4 | 35.4 | 37.0 | 32.3 | 32.8 | 33.9 | 35.5 | 30.4 | 30.9 | 32.0 | 33.6 | 28.7 | 29.2 | 30.2 | 31.8 | 35.1 | 35.6 | 36.7 | 38.2 | 34.8 | 35.3 | 36.3 | 37.9 | 33.9 | 34.4 | 35.4 | 37.0 | 32.3 | 32.8 | 33.9 | 35.5 | 30.4 | 30.9 | 32.0 | 33.6 | 28.7 | 29.2 | 30.2 | 31.8 | 35.1 | 35.6 | 36.7 | 38.2 | 34.8 | 35.3 | 36.3 | 37.9 | 33.9 | 34.4 | 35.4 | 37.0 | 32.3 | 32.8 | 33.9 | 35.5 | 30.4 | 30.9 | 32.0 | 33.6 | 28.7 | 29.2 | 30.2 | 31.8 | 35.1 | 35.6 | 36.7 | 38.2 | 34.8 | 35.3 | 36.3 | 37.9 | 33.9 | 34.4 | 35.4 | 37.0 | 32.3 | 32.8 | 33.9 | 35.5 | 30.4 | 30.9 | 32.0 | 33.6 | 28.7 | 29.2 | 30.2 | 31.8 | 35.1 | 35.6 | 36.7 | 38.2 | 34.8 | 35.3 | 36.3 | 37.9 | 33.9 | 34.4 | 35.4 | 37.0 | 32.3 | 32.8 | 33.9 | 35.5 | 30.4 | 30.9 | 32.0 | 33.6 | 28.7 | 29.2 | 30.2 | 31.8 | 35.1 | 35.6 | 36.7 | 38.2 | 34.8 | 35.3 | 36.3 | 37.9 | 33.9 | 34.4 | 35.4 | 37.0 | 32.3 | 32.8 | 33.9 | 35.5 | 30.4 | 30.9 | 32.0 | 33.6 | 28.7 | 29.2 | 30.2 | 31.8 |
| | | S/T | 1.00 | 0.87 | 0.73 | 0.6 | 1.00 | 0.88 | 0.73 | 0.6 | 1.00 | 0.91 | 0.76 | 0.6 | 1.00 | 1.00 | 0.78 | 0.6 | 1.00 | 1.00 | 0.81 | 0.7 | 1.00 | 1.00 | 0.86 | 0.7 | 1.00 | 0.87 | 0.73 | 0.6 | 1.00 | 0.88 | 0.73 | 0.6 | 1.00 | 0.91 | 0.76 | 0.6 | 1.00 | 1.00 | 0.78 | 0.6 | 1.00 | 1.00 | 0.81 | 0.7 | 1.00 | 1.00 | 0.86 | 0.7 | 1.00 | 0.87 | 0.73 | 0.6 | 1.00 | 0.88 | 0.73 | 0.6 | 1.00 | 0.91 | 0.76 | 0.6 | 1.00 | 1.00 | 0.78 | 0.6 | 1.00 | 1.00 | 0.81 | 0.7 | 1.00 | 1.00 | 0.86 | 0.7 | 1.00 | 0.87 | 0.73 | 0.6 | 1.00 | 0.88 | 0.73 | 0.6 | 1.00 | 0.91 | 0.76 | 0.6 | 1.00 | 1.00 | 0.78 | 0.6 | 1.00 | 1.00 | 0.81 | 0.7 | 1.00 | 1.00 | 0.86 | 0.7 | 1.00 | 0.87 | 0.73 | 0.6 | 1.00 | 0.88 | 0.73 | 0.6 | 1.00 | 0.91 | 0.76 | 0.6 | 1.00 | 1.00 | 0.78 | 0.6 | 1.00 | 1.00 | 0.81 | 0.7 | 1.00 | 1.00 | 0.86 | 0.7 | 1.00 | 0.87 | 0.73 | 0.6 | 1.00 | 0.88 | 0.73 | 0.6 | 1.00 | 0.91 | 0.76 | 0.6 | 1.00 | 1.00 | 0.78 | 0.6 | 1.00 | 1.00 | 0.81 | 0.7 | 1.00 | 1.00 | 0.86 | 0.7 |
| | | ΔT | 28.17 | 26.30 | 22.80 | 19.2 | 28.12 | 26.25 | 22.75 | 19.1 | 28.38 | 26.51 | 23.01 | 19.4 | 28.10 | 26.23 | 22.73 | 19.1 | 27.85 | 25.98 | 22.48 | 18.9 | 29.02 | 27.15 | 23.65 | 20.0 | 28.17 | 26.30 | 22.80 | 19.2 | 28.12 | 26.25 | 22.75 | 19.1 | 28.38 | 26.51 | 23.01 | 19.4 | 28.10 | 26.23 | 22.73 | 19.1 | 27.85 | 25.98 | 22.48 | 18.9 | 29.02 | 27.15 | 23.65 | 20.0 | 28.17 | 26.30 | 22.80 | 19.2 | 28.12 | 26.25 | 22.75 | 19.1 | 28.38 | 26.51 | 23.01 | 19.4 | 28.10 | 26.23 | 22.73 | 19.1 | 27.85 | 25.98 | 22.48 | 18.9 | 29.02 | 27.15 | 23.65 | 20.0 | 28.17 | 26.30 | 22.80 | 19.2 | 28.12 | 26.25 | 22.75 | 19.1 | 28.38 | 26.51 | 23.01 | 19.4 | 28.10 | 26.23 | 22.73 | 19.1 | 27.85 | 25.98 | 22.48 | 18.9 | 29.02 | 27.15 | 23.65 | 20.0 | 28.17 | 26.30 | 22.80 | 19.2 | 28.12 | 26.25 | 22.75 | 19.1 | 28.38 | 26.51 | 23.01 | 19.4 | 28.10 | 26.23 | 22.73 | 19.1 | 27.85 | 25.98 | 22.48 | 18.9 | 29.02 | 27.15 | 23.65 | 20.0 | 28.17 | 26.30 | 22.80 | 19.2 | 28.12 | 26.25 | 22.75 | 19.1 | 28.38 | 26.51 | 23.01 | 19.4 | 28.10 | 26.23 | 22.73 | 19.1 | 27.85 | 25.98 | 22.48 | 18.9 | 29.02 | 27.15 | 23.65 | 20.0 |
| | | kW | 2.35 | 2.35 | 2.34 | 2.4 | 2.62 | 2.62 | 2.61 | 2.6 | 2.92 | 2.92 | 2.91 | 2.9 | 3.25 | 3.25 | 3.24 | 3.3 | 3.61 | 3.61 | 3.61 | 3.6 | 4.04 | 4.04 | 4.04 | 4.1 | 2.35 | 2.35 | 2.34 | 2.4 | 2.62 | 2.62 | 2.61 | 2.6 | 2.92 | 2.92 | 2.91 | 2.9 | 3.25 | 3.25 | 3.24 | 3.3 | 3.61 | 3.61 | 3.61 | 3.6 | 4.04 | 4.04 | 4.04 | 4.1 | 2.35 | 2.35 | 2.34 | 2.4 | 2.62 | 2.62 | 2.61 | 2.6 | 2.92 | 2.92 | 2.91 | 2.9 | 3.25 | 3.25 | 3.24 | 3.3 | 3.61 | 3.61 | 3.61 | 3.6 | 4.04 | 4.04 | 4.04 | 4.1 | 2.35 | 2.35 | 2.34 | 2.4 | 2.62 | 2.62 | 2.61 | 2.6 | 2.92 | 2.92 | 2.91 | 2.9 | 3.25 | 3.25 | 3.24 | 3.3 | 3.61 | 3.61 | 3.61 | 3.6 | 4.04 | 4.04 | 4.04 | 4.1 | 2.35 | 2.35 | 2.34 | 2.4 | 2.62 | 2.62 | 2.61 | 2.6 | 2.92 | 2.92 | 2.91 | 2.9 | 3.25 | 3.25 | 3.24 | 3.3 | 3.61 | 3.61 | 3.61 | 3.6 | 4.04 | 4.04 | 4.04 | 4.1 | 2.35 | 2.35 | 2.34 | 2.4 | 2.62 | 2.62 | 2.61 | 2.6 | 2.92 | 2.92 | 2.91 | 2.9 | 3.25 | 3.25 | 3.24 | 3.3 | 3.61 | 3.61 | 3.61 | 3.6 | 4.04 | 4.04 | 4.04 | 4.1 |
| | | Amps | 8.96 | 8.95 | 8.92 | 9.0 | 10.19 | 10.19 | 10.16 | 10.3 | 11.58 | 11.57 | 11.55 | 11.6 | 13.08 | 13.07 | 13.05 | 13.1 | 14.75 | 14.74 | 14.72 | 14.8 | 16.71 | 16.70 | 16.68 | 16.8 | 8.96 | 8.95 | 8.92 | 9.0 | 10.19 | 10.19 | 10.16 | 10.3 | 11.58 | 11.57 | 11.55 | 11.6 | 13.08 | 13.07 | 13.05 | 13.1 | 14.75 | 14.74 | 14.72 | 14.8 | 16.71 | 16.70 | 16.68 | 16.8 | 8.96 | 8.95 | 8.92 | 9.0 | 10.19 | 10.19 | 10.16 | 10.3 | 11.58 | 11.57 | 11.55 | 11.6 | 13.08 | 13.07 | 13.05 | 13.1 | 14.75 | 14.74 | 14.72 | 14.8 | 16.71 | 16.70 | 16.68 | 16.8 | 8.96 | 8.95 | 8.92 | 9.0 | 10.19 | 10.19 | 10.16 | 10.3 | 11.58 | 11.57 | 11.55 | 11.6 | 13.08 | 13.07 | 13.05 | 13.1 | 14.75 | 14.74 | 14.72 | 14.8 | 16.71 | 16.70 | 16.68 | 16.8 | 8.96 | 8.95 | 8.92 | 9.0 | 10.19 | 10.19 | 10.16 | 10.3 | 11.58 | 11.57 | 11.55 | 11.6 | 13.08 | 13.07 | 13.05 | 13.1 | 14.75 | 14.74 | 14.72 | 14.8 | 16.71 | 16.70 | 16.68 | 16.8 | | | | | | | | | | | | | | | | | | | | | | | | |
| | | Hi PR | 263 | 264 | 266 | 270.7 | 304 | 306 | 307 | 313.5 | 348 | 349 | 351 | 355.2 | 394 | 395 | 397 | 401.8 | 445 | 446 | 447 | 452.0 | 498 | 499 | 501 | 505.7 | 263 | 264 | 266 | 270.7 | 304 | 306 | 307 | 313.5 | 348 | 349 | 351 | 355.2 | 394 | 395 | 397 | 401.8 | 445 | 446 | 447 | 452.0 | 498 | 499 | 501 | 505.7 | 263 | 264 | 266 | 270.7 | 304 | 306 | 307 | 313.5 | 348 | 349 | 351 | 355.2 | 394 | 395 | 397 | 401.8 | 445 | 446 | 447 | 452.0 | 498 | 499 | 501 | 505.7 | 263 | 264 | 266 | 270.7 | 304 | 306 | 307 | 313.5 | 348 | 349 | 351 | 355.2 | 394 | 395 | 397 | 401.8 | 445 | 446 | 447 | 452.0 | 498 | 499 | 501 | 505.7 | 263 | 264 | 266 | 270.7 | 304 | 306 | 307 | 313.5 | 348 | 349 | 351 | 355.2 | 394 | 395 | 397 | 401.8 | 445 | 446 | 447 | 452.0 | 498 | 499 | 501 | 505.7 | | | | | | | | | | | | | | | | | | | | | | | | |
| | Lo PR | 127 | 128 | 132 | 137.0 | 135 | 136 | 139 | 144.6 | 141 | 143 | 146 | 151.3 | 147 | 148 | 152 | 157.0 | 152 | 154 | 157 | 162.6 | 159 | 161 | 164 | 169.5 | 127 | 128 | 132 | 137.0 | 135 | 136 | 139 | 144.6 | 141 | 143 | 146 | 151.3 | 147 | 148 | 152 | 157.0 | 152 | 154 | 157 | 162.6 | 159 | 161 | 164 | 169.5 | 127 | 128 | 132 | 137.0 | 135 | 136 | 139 | 144.6 | 141 | 143 | 146 | 151.3 | 147 | 148 | 152 | 157.0 | 152 | 154 | 157 | 162.6 | 159 | 161 | 164 | 169.5 | 127 | 128 | 132 | 137.0 | 135 | 136 | 139 | 144.6 | 141 | 143 | 146 | 151.3 | 147 | 148 | 152 | 157.0 | 152 | 154 | 157 | 162.6 | 159 | 161 | 164 | 169.5 | 127 | 128 | 132 | 137.0 | 135 | 136 | 139 | 144.6 | 141 | 143 | 146 | 151.3 | 147 | 148 | 152 | 157.0 | 152 | 154 | 157 | 162.6 | 159 | 161 | 164 | 169.5 | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 1150 | MBh | 35.5 | 35.9 | 37.0 | 38.6 | 35.1 | 35.6 | 36.7 | 38.3 | 34.2 | 34.7 | 35.8 | 37.4 | 32.7 | 33.2 | 34.2 | 35.8 | 30.8 | 31.2 | 32.3 | 33.9 | 29.0 | 29.5 | 30.5 | 32.1 | 35.5 | 35.9 | 37.0 | 38.6 | 35.1 | 35.6 | 36.7 | 38.3 | 34.2 | 34.7 | 35.8 | 37.4 | 32.7 | 33.2 | 34.2 | 35.8 | 30.8 | 31.2 | 32.3 | 33.9 | 29.0 | 29.5 | 30.5 | 32.1 | 35.5 | 35.9 | 37.0 | 38.6 | 35.1 | 35.6 | 36.7 | 38.3 | 34.2 | 34.7 | 35.8 | 37.4 | 32.7 | 33.2 | 34.2 | 35.8 | 30.8 | 31.2 | 32.3 | 33.9 | 29.0 | 29.5 | 30.5 | 32.1 | 35.5 | 35.9 | 37.0 | 38.6 | 35.1 | 35.6 | 36.7 | 38.3 | 34.2 | 34.7 | 35.8 | 37.4 | 32.7 | 33.2 | 34.2 | 35.8 | 30.8 | 31.2 | 32.3 | 33.9 | 29.0 | 29.5 | 30.5 | 32.1 | 35.5 | 35.9 | 37.0 | 38.6 | 35.1 | 35.6 | 36.7 | 38.3 | 34.2 | 34.7 | 35.8 | 37.4 | 32.7 | 33.2 | 34.2 | 35.8 | 30.8 | 31.2 | 32.3 | 33.9 | 29.0 | 29.5 | 30.5 | 32.1 | | | | | | | | | | | | | | | | | | | | | | | | |
| | | S/T | 1.00 | 0.92 | 0.77 | 0.6 | 1.00 | 0.92 | 0.78 | 0.6 | 1.00 | 0.95 | 0.80 | 0.6 | 1.00 | 1.00 | 0.82 | 0.7 | 1.00 | 1.00 | 0.85 | 0.7 | 1.00 | 1.00 | 0.90 | 0.7 | 1.00 | 0.92 | 0.77 | 0.6 | 1.00 | 0.92 | 0.78 | 0.6 | 1.00 | 0.95 | 0.80 | 0.6 | 1.00 | 1.00 | 0.82 | 0.7 | 1.00 | 1.00 | 0.85 | 0.7 | 1.00 | 1.00 | 0.90 | 0.7 | 1.00 | 0.92 | 0.77 | 0.6 | 1.00 | 0.92 | 0.78 | 0.6 | 1.00 | 0.95 | 0.80 | 0.6 | 1.00 | 1.00 | 0.82 | 0.7 | 1.00 | 1.00 | 0.85 | 0.7 | 1.00 | 1.00 | 0.90 | 0.7 | 1.00 | 0.92 | 0.77 | 0.6 | 1.00 | 0.92 | 0.78 | 0.6 | 1.00 | 0.95 | 0.80 | 0.6 | 1.00 | 1.00 | 0.82 | 0.7 | 1.00 | 1.00 | 0.85 | 0.7 | 1.00 | 1.00 | 0.90 | 0.7 | 1.00 | 0.92 | 0.77 | 0.6 | 1.00 | 0.92 | 0.78 | 0.6 | 1.00 | 0.95 | 0.80 | 0.6 | 1.00 | 1.00 | 0.82 | 0.7 | 1.00 | 1.00 | 0.85 | 0.7 | 1.00 | 1.00 | 0.90 | 0.7 | | | | | | | | | | | | | | | | | | | | | | | | |
| | | ΔT | 27.41 | 25.53 | 22.03 | 18.4 | 27.36 | 25.48 | 21.98 | 18.4 | 27.62 | 25.75 | 22.25 | 18.6 | 27.34 | 25.46 | 21.96 | 18.3 | 27.09 | 25.21 | 21.71 | 18.1 | 28.26 | 26.39 | 22.89 | 19.3 | 27.41 | 25.53 | 22.03 | 18.4 | 27.36 | 25.48 | 21.98 | 18.4 | 27.62 | 25.75 | 22.25 | 18.6 | 27.34 | 25.46 | 21.96 | 18.3 | 27.09 | 25.21 | 21.71 | 18.1 | 28.26 | 26.39 | 22.89 | 19.3 | 27.41 | 25.53 | 22.03 | 18.4 | 27.36 | 25.48 | 21.98 | 18.4 | 27.62 | 25.75 | 22.25 | 18.6 | 27.34 | 25.46 | 21.96 | 18.3 | 27.09 | 25.21 | 21.71 | 18.1 | 28.26 | 26.39 | 22.89 | 19.3 | 27.41 | 25.53 | 22.03 | 18.4 | 27.36 | 25.48 | 21.98 | 18.4 | 27.62 | 25.75 | 22.25 | 18.6 | 27.34 | 25.46 | 21.96 | 18.3 | 27.09 | 25.21 | 21.71 | 18.1 | 28.26 | 26.39 | 22.89 | 19.3 | 27.41 | 25.53 | 22.03 | 18.4 | 27.36 | 25.48 | 21.98 | 18.4 | 27.62 | 25.75 | 22.25 | 18.6 | 27.34 | 25.46 | 21.96 | 18.3 | 27.09 | 25.21 | 21.71 | 18.1 | 28.26 | | | | | | | | | | | | | | | | | | | | | | | | | | | |

| IDB | Airflow | Outdoor Ambient Temperature | | | | | | | | | | | | | | | | | | | | | | | | |
|------|---------|-----------------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| | | 65 | | | | 75 | | | | 85 | | | | 95 | | | | 105 | | | | 115 | | | | |
| | | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | |
| 70 | 1300 | MBh | 41.2 | 41.8 | 43.0 | - | 40.9 | 41.4 | 42.7 | - | 39.8 | 40.4 | 41.6 | - | 38.0 | 38.5 | 39.8 | - | 35.7 | 36.3 | 37.5 | - | 33.7 | 34.3 | 35.5 | - |
| | | S/T | 0.68 | 0.60 | 0.46 | - | 0.69 | 0.61 | 0.47 | - | 0.71 | 0.63 | 0.50 | - | 1.00 | 0.65 | 0.52 | - | 1.00 | 0.68 | 0.54 | - | 1.00 | 0.73 | 0.59 | - |
| | | ΔT | 20.00 | 18.04 | 14.38 | - | 19.94 | 17.99 | 14.33 | - | 20.22 | 18.26 | 14.60 | - | 19.92 | 17.96 | 14.31 | - | 19.66 | 17.70 | 14.05 | - | 20.89 | 18.93 | 15.27 | - |
| | | kW | 2.73 | 2.72 | 2.72 | - | 3.05 | 3.05 | 3.04 | - | 3.42 | 3.41 | 3.41 | - | 3.81 | 3.81 | 3.80 | - | 4.25 | 4.25 | 4.24 | - | 4.77 | 4.77 | 4.76 | - |
| | | Amps | 10.44 | 10.43 | 10.41 | - | 11.94 | 11.93 | 11.90 | - | 13.61 | 13.59 | 13.57 | - | 15.41 | 15.40 | 15.37 | - | 17.43 | 17.42 | 17.39 | - | 19.79 | 19.78 | 19.76 | - |
| | 1400 | Hi PR | 274 | 275 | 277 | - | 317 | 318 | 320 | - | 362 | 363 | 365 | - | 411 | 412 | 414 | - | 463 | 464 | 466 | - | 518 | 520 | 522 | - |
| | | Lo PR | 127 | 128 | 132 | - | 134 | 136 | 139 | - | 141 | 143 | 146 | - | 147 | 148 | 151 | - | 152 | 154 | 157 | - | 159 | 161 | 164 | - |
| | | MBh | 41.6 | 42.2 | 43.4 | - | 41.2 | 41.8 | 43.0 | - | 40.2 | 40.8 | 42.0 | - | 38.4 | 38.9 | 40.1 | - | 36.1 | 36.7 | 37.9 | - | 34.1 | 34.7 | 35.9 | - |
| | | S/T | 0.70 | 0.63 | 0.49 | - | 0.71 | 0.63 | 0.49 | - | 0.74 | 0.66 | 0.52 | - | 1.00 | 0.68 | 0.54 | - | 1.00 | 0.70 | 0.56 | - | 1.00 | 0.75 | 0.61 | - |
| | | ΔT | 19.37 | 17.41 | 13.75 | - | 19.31 | 17.36 | 13.70 | - | 19.59 | 17.63 | 13.97 | - | 19.29 | 17.34 | 13.68 | - | 19.03 | 17.07 | 13.42 | - | 20.26 | 18.30 | 14.64 | - |
| 1575 | kW | 2.74 | 2.73 | 2.73 | - | 3.06 | 3.06 | 3.05 | - | 3.43 | 3.42 | 3.42 | - | 3.82 | 3.82 | 3.81 | - | 4.26 | 4.26 | 4.25 | - | 4.78 | 4.78 | 4.77 | - | |
| | Amps | 10.48 | 10.47 | 10.45 | - | 11.98 | 11.97 | 11.94 | - | 13.65 | 13.63 | 13.61 | - | 15.45 | 15.44 | 15.41 | - | 17.47 | 17.46 | 17.43 | - | 19.83 | 19.82 | 19.80 | - | |
| | Hi PR | 276 | 277 | 279 | - | 319 | 320 | 322 | - | 364 | 365 | 367 | - | 412 | 413 | 415 | - | 464 | 465 | 467 | - | 520 | 521 | 523 | - | |
| | Lo PR | 128 | 130 | 133 | - | 136 | 137 | 140 | - | 142 | 144 | 147 | - | 148 | 150 | 153 | - | 154 | 155 | 158 | - | 160 | 162 | 165 | - | |
| | MBh | 42.4 | 43.0 | 44.2 | - | 42.0 | 42.6 | 43.8 | - | 41.0 | 41.5 | 42.8 | - | 39.1 | 39.7 | 40.9 | - | 36.9 | 37.5 | 38.7 | - | 34.9 | 35.4 | 36.7 | - | |
| 75 | 1300 | S/T | 0.72 | 0.65 | 0.51 | - | 0.73 | 0.65 | 0.51 | - | 1.00 | 0.68 | 0.54 | - | 1.00 | 0.70 | 0.56 | - | 1.00 | 0.72 | 0.58 | - | 1.00 | 1.00 | 0.64 | - |
| | | ΔT | 18.38 | 16.42 | 12.76 | - | 18.33 | 16.37 | 12.71 | - | 18.60 | 16.64 | 12.99 | - | 18.31 | 16.35 | 12.69 | - | 18.05 | 16.09 | 12.43 | - | 19.27 | 17.31 | 13.66 | - |
| | | kW | 2.75 | 2.75 | 2.74 | - | 3.08 | 3.07 | 3.07 | - | 3.44 | 3.44 | 3.43 | - | 3.83 | 3.83 | 3.83 | - | 4.28 | 4.27 | 4.27 | - | 4.79 | 4.79 | 4.78 | - |
| | | Amps | 10.55 | 10.54 | 10.51 | - | 12.04 | 12.03 | 12.00 | - | 13.71 | 13.70 | 13.67 | - | 15.52 | 15.50 | 15.48 | - | 17.53 | 17.52 | 17.50 | - | 19.90 | 19.89 | 19.86 | - |
| | | Hi PR | 278 | 279 | 281 | - | 321 | 322 | 324 | - | 366 | 367 | 369 | - | 414 | 416 | 417 | - | 467 | 468 | 470 | - | 522 | 523 | 525 | - |
| | 1400 | Lo PR | 130 | 132 | 135 | - | 138 | 140 | 143 | - | 145 | 146 | 149 | - | 150 | 152 | 155 | - | 156 | 157 | 161 | - | 163 | 164 | 168 | - |
| | | MBh | 41.3 | 41.8 | 43.0 | 44.9 | 40.9 | 41.5 | 42.7 | 44.5 | 39.8 | 40.4 | 41.6 | 43.5 | 38.0 | 38.6 | 39.8 | 41.6 | 35.8 | 36.3 | 37.6 | 39.4 | 33.7 | 34.3 | 35.5 | 37.4 |
| | | S/T | 0.81 | 0.73 | 0.60 | 0.4 | 1.00 | 0.74 | 0.60 | 0.5 | 1.00 | 0.77 | 0.63 | 0.5 | 1.00 | 0.79 | 0.65 | 0.5 | 1.00 | 0.81 | 0.67 | 0.5 | 1.00 | 1.00 | 0.72 | 0.6 |
| | | ΔT | 24.30 | 22.35 | 18.69 | 14.9 | 24.25 | 22.29 | 18.63 | 14.8 | 24.53 | 22.57 | 18.91 | 15.1 | 24.23 | 22.27 | 18.61 | 14.8 | 23.97 | 22.01 | 18.35 | 14.6 | 25.20 | 23.24 | 19.58 | 15.8 |
| | | kW | 2.72 | 2.72 | 2.72 | 2.7 | 3.05 | 3.05 | 3.04 | 3.1 | 3.42 | 3.41 | 3.41 | 3.4 | 3.81 | 3.81 | 3.80 | 3.8 | 4.25 | 4.25 | 4.24 | 4.3 | 4.77 | 4.76 | 4.76 | 4.8 |
| 1575 | Amps | 10.43 | 10.42 | 10.40 | 10.5 | 11.93 | 11.92 | 11.89 | 12.0 | 13.60 | 13.58 | 13.56 | 13.7 | 15.40 | 15.39 | 15.36 | 15.5 | 17.42 | 17.41 | 17.38 | 17.5 | 19.78 | 19.77 | 19.75 | 19.9 | |
| | Hi PR | 275 | 276 | 278 | 282.3 | 317 | 319 | 321 | 325.3 | 362 | 364 | 365 | 370.2 | 411 | 412 | 414 | 418.6 | 463 | 464 | 466 | 470.8 | 519 | 520 | 522 | 526.5 | |
| | Lo PR | 127 | 128 | 132 | 136.9 | 134 | 136 | 139 | 144.5 | 141 | 143 | 146 | 151.2 | 147 | 148 | 152 | 156.8 | 152 | 154 | 157 | 162.4 | 159 | 161 | 164 | 169.3 | |
| | MBh | 41.6 | 42.2 | 43.4 | 45.3 | 41.3 | 41.8 | 43.1 | 44.9 | 40.2 | 40.8 | 42.0 | 43.9 | 38.4 | 39.0 | 40.2 | 42.0 | 36.1 | 36.7 | 37.9 | 39.8 | 34.1 | 34.7 | 35.9 | 37.8 | |
| | S/T | 0.84 | 0.76 | 0.62 | 0.5 | 1.00 | 0.76 | 0.63 | 0.5 | 1.00 | 0.79 | 0.65 | 0.5 | 1.00 | 0.81 | 0.67 | 0.5 | 1.00 | 1.00 | 0.69 | 0.5 | 1.00 | 1.00 | 0.75 | 0.6 | |
| 75 | 1300 | ΔT | 23.67 | 21.72 | 18.06 | 14.3 | 23.62 | 21.66 | 18.00 | 14.2 | 23.90 | 21.94 | 18.28 | 14.5 | 23.60 | 21.64 | 17.98 | 14.2 | 23.34 | 21.38 | 17.72 | 13.9 | 24.57 | 22.61 | 18.95 | 15.2 |
| | | kW | 2.73 | 2.73 | 2.72 | 2.7 | 3.06 | 3.06 | 3.05 | 3.1 | 3.42 | 3.42 | 3.42 | 3.4 | 3.82 | 3.82 | 3.81 | 3.8 | 4.26 | 4.26 | 4.25 | 4.3 | 4.78 | 4.77 | 4.77 | 4.8 |
| | | Amps | 10.47 | 10.46 | 10.44 | 10.6 | 11.97 | 11.96 | 11.93 | 12.0 | 13.64 | 13.62 | 13.60 | 13.7 | 15.44 | 15.43 | 15.40 | 15.5 | 17.46 | 17.45 | 17.42 | 17.5 | 19.82 | 19.81 | 19.79 | 19.9 |
| | | Hi PR | 276 | 277 | 279 | 283.7 | 319 | 320 | 322 | 326.6 | 364 | 365 | 367 | 371.6 | 412 | 413 | 415 | 420.0 | 464 | 466 | 467 | 472.2 | 520 | 521 | 523 | 527.9 |
| | | Lo PR | 128 | 130 | 133 | 138.2 | 136 | 137 | 140 | 145.8 | 142 | 144 | 147 | 152.4 | 148 | 150 | 153 | 158.1 | 154 | 155 | 158 | 163.6 | 160 | 162 | 165 | 170.5 |
| | 1400 | MBh | 42.4 | 43.0 | 44.2 | 46.1 | 42.1 | 42.6 | 43.8 | 45.7 | 41.0 | 41.6 | 42.8 | 44.6 | 39.2 | 39.7 | 40.9 | 42.8 | 36.9 | 37.5 | 38.7 | 40.6 | 34.9 | 35.5 | 36.7 | 38.5 |
| | | S/T | 0.86 | 0.78 | 0.64 | 0.5 | 1.00 | 0.78 | 0.65 | 0.5 | 1.00 | 0.81 | 0.67 | 0.5 | 1.00 | 0.83 | 0.69 | 0.5 | 1.00 | 1.00 | 0.71 | 0.6 | 1.00 | 1.00 | 0.77 | 0.6 |
| | | ΔT | 22.69 | 20.73 | 17.07 | 13.3 | 22.63 | 20.68 | 17.02 | 13.2 | 22.91 | 20.95 | 17.29 | 13.5 | 22.61 | 20.66 | 17.00 | 13.2 | 22.35 | 20.39 | 16.74 | 12.9 | 23.58 | 21.62 | 17.96 | 14.2 |
| | | kW | 2.75 | 2.74 | 2.74 | 2.8 | 3.07 | 3.07 | 3.07 | 3.1 | 3.44 | 3.44 | 3.43 | 3.5 | 3.83 | 3.83 | 3.82 | 3.8 | 4.27 | 4.27 | 4.27 | 4.3 | 4.79 | 4.79 | 4.78 | 4.8 |
| | | Amps | 10.54 | 10.53 | 10.50 | 10.6 | 12.03 | 12.02 | 12.00 | 12.1 | 13.70 | 13.69 | 13.66 | 13.8 | 15.51 | 15.49 | 15.47 | 15.6 | 17.52 | 17.51 | 17.49 | 17.6 | 19.89 | 19.88 | 19.85 | 20.0 |
| 1575 | Hi PR | 278 | 280 | 281 | 286.2 | 321 | 322 | 324 | 329.1 | 366 | 367 | 369 | 374.0 | 415 | 416 | 418 | 422.4 | 467 | 468 | 470 | 474.6 | 523 | 524 | 526 | 530.3 | |
| | Lo PR | 130 | 132 | 135 | 140.5 | 138 | 140 | 143 | 148.2 | 145 | 146 | 149 | 154.8 | 150 | 152 | 155 | 160.4 | 156 | 157 | 161 | 166.0 | 163 | 164 | 168 | 172.9 | |
| | MBh | 41.3 | 41.8 | 43.0 | 44.9 | 40.9 | 41.5 | 42.7 | 44.5 | 39.8 | 40.4 | 41.6 | 43.5 | 38.0 | 38.6 | 39.8 | 41.6 | 35.8 | 36.3 | 37.6 | 39.4 | 33.7 | 34.3 | 35.5 | 37.4 | |
| | S/T | 0.81 | 0.73 | 0.60 | 0.4 | 1.00 | 0.74 | 0.60 | 0.5 | 1.00 | 0.77 | 0.63 | 0.5 | 1.00 | 0.79 | 0.65 | 0.5 | 1.00 | 0.81 | 0.67 | 0.5 | 1.00 | 1.00 | 0.72 | 0.6 | |
| | ΔT | 24.30 | 22.35 | 18.69 | 14.9 | 24.25 | 22.29 | 18.63 | 14.8 | 24.53 | 22.57 | 18.91 | 15.1 | 24.23 | 22.27 | 18.61 | 14.8 | 23.97 | 22.01 | 18.35 | 14.6 | 25.20 | 23.24 | 19.58 | 15.8 | |

IDB: Entering Indoor Dry Bulb Temperature
 High and low pressures are measured at the liquid and suction access fittings.
 Shaded area reflects ACCA (TVA) conditions.
 Amps: Unit amps (comp.+ evaporator + condenser fan motors)
 kW = Total system power

| IDB | Airflow | Outdoor Ambient Temperature | | | | | | | | | | | | 105 | | | | | | | | | | | | 115 | | | | | | | | | | | |
|-------|---------|-----------------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|--|--|--|--|--|--|--|--|--|--|--|
| | | 65 | | | | 75 | | | | 85 | | | | 95 | | | | 105 | | | | 115 | | | | | | | | | | | | | | | |
| | | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | | | | | | | | | | | | |
| 80 | 1300 | MBh | 41.5 | 42.0 | 43.3 | 45.1 | 41.1 | 41.7 | 42.9 | 44.7 | 40.0 | 40.6 | 41.8 | 43.7 | 38.2 | 38.8 | 40.0 | 41.9 | 36.0 | 36.5 | 37.8 | 39.6 | 33.9 | 34.5 | 35.7 | 37.6 | | | | | | | | | | | |
| | | S/T | 1.00 | 0.86 | 0.72 | 0.6 | 1.00 | 0.87 | 0.73 | 0.6 | 1.00 | 0.89 | 0.75 | 0.6 | 1.00 | 1.00 | 0.77 | 0.6 | 1.00 | 1.00 | 0.80 | 0.7 | 1.00 | 1.00 | 0.85 | 0.7 | | | | | | | | | | | |
| | | ΔT | 28.64 | 26.68 | 23.02 | 19.2 | 28.59 | 26.63 | 22.97 | 19.2 | 28.86 | 26.90 | 23.25 | 19.5 | 28.57 | 26.61 | 22.95 | 19.2 | 28.31 | 26.35 | 22.69 | 18.9 | 29.53 | 27.57 | 23.92 | 20.1 | | | | | | | | | | | |
| | | kW | 2.73 | 2.72 | 2.72 | 2.7 | 3.05 | 3.05 | 3.04 | 3.1 | 3.42 | 3.41 | 3.41 | 3.4 | 3.81 | 3.81 | 3.80 | 3.8 | 4.25 | 4.25 | 4.24 | 4.3 | 4.77 | 4.77 | 4.77 | 4.8 | | | | | | | | | | | |
| | | Amps | 10.44 | 10.43 | 10.40 | 10.5 | 11.94 | 11.92 | 11.90 | 12.0 | 13.60 | 13.59 | 13.57 | 13.7 | 15.41 | 15.40 | 15.37 | 15.5 | 17.43 | 17.41 | 17.39 | 17.5 | 19.79 | 19.78 | 19.75 | 19.9 | | | | | | | | | | | |
| | | Hi PR | 275 | 276 | 278 | 282.8 | 318 | 319 | 321 | 325.8 | 363 | 364 | 366 | 370.7 | 411 | 412 | 414 | 419.1 | 463 | 465 | 467 | 471.3 | 519 | 520 | 522 | 527.0 | | | | | | | | | | | |
| | Lo PR | 127 | 129 | 132 | 137.5 | 135 | 137 | 140 | 145.1 | 142 | 143 | 146 | 151.8 | 147 | 149 | 152 | 157.4 | 153 | 154 | 158 | 162.9 | 160 | 161 | 165 | 169.8 | | | | | | | | | | | | |
| | 1400 | MBh | 41.8 | 42.4 | 43.6 | 45.5 | 41.5 | 42.1 | 43.3 | 45.1 | 40.4 | 41.0 | 42.2 | 44.1 | 38.6 | 39.2 | 40.4 | 42.2 | 36.4 | 36.9 | 38.1 | 40.0 | 34.3 | 34.9 | 36.1 | 38.0 | | | | | | | | | | | |
| | | S/T | 1.00 | 0.89 | 0.75 | 0.6 | 1.00 | 0.89 | 0.75 | 0.6 | 1.00 | 0.92 | 0.78 | 0.6 | 1.00 | 1.00 | 0.80 | 0.7 | 1.00 | 1.00 | 0.82 | 0.7 | 1.00 | 1.00 | 0.87 | 0.7 | | | | | | | | | | | |
| | | ΔT | 28.01 | 26.05 | 22.39 | 18.6 | 27.96 | 26.00 | 22.34 | 18.6 | 28.23 | 26.27 | 22.62 | 18.8 | 27.94 | 25.98 | 22.32 | 18.5 | 27.68 | 25.72 | 22.06 | 18.3 | 28.90 | 26.94 | 23.29 | 19.5 | | | | | | | | | | | |
| | | kW | 2.73 | 2.73 | 2.73 | 2.8 | 3.06 | 3.06 | 3.05 | 3.1 | 3.43 | 3.42 | 3.42 | 3.4 | 3.82 | 3.82 | 3.81 | 3.8 | 4.26 | 4.26 | 4.25 | 4.3 | 4.78 | 4.78 | 4.77 | 4.8 | | | | | | | | | | | |
| | | Amps | 10.48 | 10.47 | 10.44 | 10.6 | 11.98 | 11.96 | 11.94 | 12.1 | 13.64 | 13.63 | 13.61 | 13.7 | 15.45 | 15.44 | 15.41 | 15.5 | 17.47 | 17.45 | 17.43 | 17.5 | 19.83 | 19.82 | 19.80 | 19.9 | | | | | | | | | | | |
| Hi PR | | 276 | 278 | 279 | 284.2 | 319 | 320 | 322 | 327.1 | 364 | 365 | 367 | 372.1 | 413 | 414 | 416 | 420.5 | 465 | 466 | 468 | 472.7 | 521 | 522 | 524 | 528.4 | | | | | | | | | | | | |
| Lo PR | 129 | 130 | 133 | 138.7 | 136 | 138 | 141 | 146.3 | 143 | 144 | 148 | 153.0 | 149 | 150 | 153 | 158.6 | 154 | 156 | 159 | 164.1 | 161 | 163 | 166 | 171.1 | | | | | | | | | | | | | |
| 1575 | MBh | 42.6 | 43.2 | 44.4 | 46.3 | 42.3 | 42.8 | 44.1 | 45.9 | 41.2 | 41.8 | 43.0 | 44.8 | 39.4 | 39.9 | 41.2 | 43.0 | 37.1 | 37.7 | 38.9 | 40.8 | 35.1 | 35.7 | 36.9 | 38.7 | | | | | | | | | | | | |
| | S/T | 1.00 | 0.91 | 0.77 | 0.6 | 1.00 | 0.91 | 0.77 | 0.6 | 1.00 | 1.00 | 0.80 | 0.7 | 1.00 | 1.00 | 0.82 | 0.7 | 1.00 | 1.00 | 0.84 | 0.7 | 1.00 | 1.00 | 0.87 | 0.7 | | | | | | | | | | | | |
| | ΔT | 27.02 | 25.07 | 21.41 | 17.6 | 26.97 | 25.01 | 21.35 | 17.6 | 27.25 | 25.29 | 21.63 | 17.8 | 26.95 | 24.99 | 21.33 | 17.5 | 26.69 | 24.73 | 21.07 | 17.3 | 27.92 | 25.96 | 22.30 | 18.5 | | | | | | | | | | | | |
| | kW | 2.75 | 2.75 | 2.74 | 2.8 | 3.08 | 3.07 | 3.07 | 3.1 | 3.44 | 3.44 | 3.43 | 3.5 | 3.83 | 3.83 | 3.83 | 3.8 | 4.27 | 4.27 | 4.27 | 4.3 | 4.79 | 4.79 | 4.78 | 4.8 | | | | | | | | | | | | |
| | Amps | 10.55 | 10.53 | 10.51 | 10.6 | 12.04 | 12.03 | 12.00 | 12.1 | 13.71 | 13.70 | 13.67 | 13.8 | 15.51 | 15.50 | 15.48 | 15.6 | 17.53 | 17.52 | 17.49 | 17.6 | 19.90 | 19.89 | 19.86 | 20.0 | | | | | | | | | | | | |
| | Hi PR | 279 | 280 | 282 | 286.7 | 322 | 323 | 325 | 329.6 | 367 | 368 | 370 | 374.5 | 415 | 416 | 418 | 423.0 | 467 | 468 | 470 | 475.1 | 523 | 524 | 526 | 530.8 | | | | | | | | | | | | |
| Lo PR | 131 | 133 | 136 | 141.1 | 139 | 140 | 143 | 148.7 | 145 | 147 | 150 | 155.4 | 151 | 152 | 156 | 161.0 | 156 | 158 | 161 | 166.5 | 163 | 165 | 168 | 173.5 | | | | | | | | | | | | | |

| | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| 85 | 1300 | MBh | 42.2 | 42.7 | 43.9 | 45.8 | 41.8 | 42.4 | 43.6 | 45.4 | 40.7 | 41.3 | 42.5 | 44.4 | 38.9 | 39.5 | 40.7 | 42.5 | 36.7 | 37.2 | 38.5 | 40.3 | 34.6 | 35.2 | 36.4 | 38.3 |
| | | S/T | 1.00 | 0.96 | 0.83 | 0.7 | 1.00 | 1.00 | 0.83 | 0.7 | 1.00 | 1.00 | 0.86 | 0.7 | 1.00 | 1.00 | 0.88 | 0.7 | 1.00 | 1.00 | 0.80 | 0.8 | 1.00 | 1.00 | 0.85 | 0.8 |
| | | ΔT | 32.49 | 30.53 | 26.87 | 23.1 | 32.43 | 30.47 | 26.82 | 23.0 | 32.71 | 30.75 | 27.09 | 23.3 | 32.41 | 30.45 | 26.80 | 23.0 | 32.15 | 30.19 | 26.53 | 22.7 | 33.38 | 31.42 | 27.76 | 24.0 |
| | | kW | 2.73 | 2.73 | 2.72 | 2.7 | 3.06 | 3.06 | 3.05 | 3.1 | 3.42 | 3.42 | 3.41 | 3.4 | 3.82 | 3.81 | 3.81 | 3.8 | 4.26 | 4.26 | 4.25 | 4.3 | 4.78 | 4.77 | 4.77 | 4.8 |
| | | Amps | 10.47 | 10.46 | 10.43 | 10.5 | 11.96 | 11.95 | 11.93 | 12.0 | 13.63 | 13.62 | 13.59 | 13.7 | 15.44 | 15.43 | 15.40 | 15.5 | 17.45 | 17.44 | 17.42 | 17.5 | 19.82 | 19.81 | 19.78 | 19.9 |
| | | Hi PR | 276 | 277 | 279 | 284.1 | 319 | 320 | 322 | 327.0 | 364 | 365 | 367 | 372.0 | 413 | 414 | 416 | 420.4 | 465 | 466 | 468 | 472.6 | 520 | 522 | 524 | 528.3 |
| | Lo PR | 129 | 131 | 134 | 139.4 | 137 | 138 | 142 | 147.0 | 144 | 145 | 148 | 153.6 | 149 | 151 | 154 | 159.3 | 155 | 156 | 159 | 164.8 | 162 | 163 | 166 | 171.7 | |
| | 1400 | MBh | 42.5 | 43.1 | 44.3 | 46.2 | 42.2 | 42.7 | 44.0 | 45.8 | 41.1 | 41.7 | 42.9 | 44.8 | 39.3 | 39.9 | 41.1 | 42.9 | 37.0 | 37.6 | 38.8 | 40.7 | 35.0 | 35.6 | 36.8 | 38.6 |
| | | S/T | 1.00 | 0.99 | 0.85 | 0.7 | 1.00 | 1.00 | 0.86 | 0.7 | 1.00 | 1.00 | 0.88 | 0.7 | 1.00 | 1.00 | 0.90 | 0.8 | 1.00 | 1.00 | 0.80 | 0.8 | 1.00 | 1.00 | 0.85 | 0.8 |
| | | ΔT | 31.86 | 29.90 | 26.24 | 22.5 | 31.80 | 29.84 | 26.19 | 22.4 | 32.08 | 30.12 | 26.46 | 22.7 | 31.78 | 29.82 | 26.17 | 22.4 | 31.52 | 29.56 | 25.90 | 22.1 | 32.75 | 30.79 | 27.13 | 23.3 |
| | | kW | 2.74 | 2.74 | 2.73 | 2.8 | 3.07 | 3.06 | 3.06 | 3.1 | 3.43 | 3.43 | 3.42 | 3.4 | 3.83 | 3.82 | 3.82 | 3.8 | 4.27 | 4.26 | 4.26 | 4.3 | 4.78 | 4.78 | 4.78 | 4.8 |
| | | Amps | 10.51 | 10.50 | 10.47 | 10.6 | 12.00 | 11.99 | 11.97 | 12.1 | 13.67 | 13.66 | 13.64 | 13.7 | 15.48 | 15.47 | 15.44 | 15.6 | 17.49 | 17.48 | 17.46 | 17.6 | 19.86 | 19.85 | 19.82 | 19.9 |
| Hi PR | | 278 | 279 | 281 | 285.5 | 321 | 322 | 324 | 328.4 | 366 | 367 | 369 | 373.4 | 414 | 415 | 417 | 421.8 | 466 | 467 | 469 | 474.0 | 522 | 523 | 525 | 529.7 | |
| Lo PR | 131 | 132 | 135 | 140.6 | 138 | 140 | 143 | 148.2 | 145 | 146 | 150 | 154.9 | 150 | 152 | 155 | 160.5 | 156 | 158 | 161 | 166.0 | 163 | 164 | 168 | 172.9 | | |
| 1575 | MBh | 43.3 | 43.9 | 45.1 | 47.0 | 42.9 | 43.5 | 44.7 | 46.6 | 41.9 | 42.5 | 43.7 | 45.5 | 40.1 | 40.6 | 41.8 | 43.7 | 37.8 | 38.4 | 39.6 | 41.5 | 35.8 | 36.4 | 37.6 | 39.4 | |
| | S/T | 1.00 | 1.00 | 0.87 | 0.7 | 1.00 | 1.00 | 0.88 | 0.7 | 1.00 | 1.00 | 0.90 | 0.8 | 1.00 | 1.00 | 0.92 | 0.8 | 1.00 | 1.00 | 0.80 | 0.8 | 1.00 | 1.00 | 0.85 | 0.9 | |
| | ΔT | 30.87 | 28.91 | 25.25 | 21.5 | 30.82 | 28.86 | 25.20 | 21.4 | 31.09 | 29.13 | 25.48 | 21.7 | 30.80 | 28.84 | 25.18 | 21.4 | 30.53 | 28.58 | 24.92 | 21.1 | 31.76 | 29.80 | 26.14 | 22.4 | |
| | kW | 2.76 | 2.75 | 2.75 | 2.8 | 3.08 | 3.08 | 3.07 | 3.1 | 3.45 | 3.44 | 3.44 | 3.5 | 3.84 | 3.84 | 3.83 | 3.9 | 4.28 | 4.28 | 4.27 | 4.3 | 4.80 | 4.80 | 4.79 | 4.8 | |
| | Amps | 10.57 | 10.56 | 10.54 | 10.7 | 12.07 | 12.06 | 12.03 | 12.1 | 13.74 | 13.73 | 13.70 | 13.8 | 15.54 | 15.53 | 15.50 | 15.6 | 17.56 | 17.55 | 17.52 | 17.6 | 19.93 | 19.91 | 19.89 | 20.0 | |
| | Hi PR | 280 | 281 | 283 | 287.9 | 323 | 324 | 326 | 330.9 | 368 | 369 | 371 | 375.8 | 416 | 418 | 419 | 424.2 | 469 | 470 | 472 | 476.4 | 524 | 525 | 527 | 532.1 | |
| Lo PR | 133 | 134 | 138 | 143.0 | 141 | 142 | 145 | 150.6 | 147 | 149 | 152 | 157.2 | 153 | 154 | 158 | 162.9 | 158 | 160 | 163 | 168.4 | 165 | 167 | 170 | 175.3 | | |

IDB: Entering Indoor Dry Bulb Temperature
 High and low pressures are measured at the liquid and suction access fittings.
 Shaded area reflects AHRI (TVA) conditions.
 Amps: Unit amps (comp.+ evaporator + condenser fan motors)
 kW = Total system power

| IDB | Airflow | Outdoor Ambient Temperature | | | | | | | | | | | | | | | | | | | | | | | | |
|-------------|-------------|-----------------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| | | 65 | | | | 75 | | | | 85 | | | | 95 | | | | 105 | | | | 115 | | | | |
| | | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | |
| 70 | 1400 | MBh | 47.3 | 47.9 | 49.3 | - | 46.8 | 47.5 | 48.9 | - | 45.6 | 46.3 | 47.7 | - | 43.5 | 44.2 | 45.6 | - | 40.9 | 41.6 | 43.0 | - | 38.5 | 39.2 | 40.6 | - |
| | | S/T | 0.65 | 0.57 | 0.43 | - | 0.66 | 0.58 | 0.44 | - | 0.68 | 0.60 | 0.46 | - | 1.00 | 0.62 | 0.48 | - | 1.00 | 0.65 | 0.51 | - | 1.00 | 0.70 | 0.56 | - |
| | | ΔT | 19.64 | 17.79 | 14.33 | - | 19.59 | 17.74 | 14.28 | - | 19.85 | 18.00 | 14.54 | - | 19.57 | 17.72 | 14.26 | - | 19.33 | 17.47 | 14.01 | - | 20.49 | 18.63 | 15.17 | - |
| | | kW | 3.21 | 3.21 | 3.20 | - | 3.57 | 3.56 | 3.56 | - | 3.96 | 3.96 | 3.95 | - | 4.39 | 4.39 | 4.38 | - | 4.87 | 4.87 | 4.86 | - | 5.44 | 5.43 | 5.43 | - |
| | | Amps | 11.41 | 11.40 | 11.37 | - | 13.04 | 13.03 | 13.00 | - | 14.85 | 14.84 | 14.81 | - | 16.82 | 16.81 | 16.78 | - | 19.02 | 19.00 | 18.97 | - | 21.59 | 21.58 | 21.55 | - |
| | 1525 | Hi PR | 265 | 266 | 268 | - | 307 | 308 | 310 | - | 351 | 352 | 354 | - | 398 | 399 | 401 | - | 449 | 450 | 452 | - | 503 | 504 | 506 | - |
| | | Lo PR | 126 | 128 | 131 | - | 134 | 136 | 139 | - | 141 | 142 | 146 | - | 146 | 148 | 151 | - | 152 | 154 | 157 | - | 159 | 161 | 164 | - |
| | | MBh | 47.7 | 48.3 | 49.7 | - | 47.3 | 47.9 | 49.3 | - | 46.0 | 46.7 | 48.1 | - | 43.9 | 44.6 | 46.0 | - | 41.3 | 42.0 | 43.4 | - | 39.0 | 39.6 | 41.0 | - |
| | | S/T | 0.69 | 0.61 | 0.47 | - | 0.69 | 0.61 | 0.47 | - | 0.72 | 0.64 | 0.50 | - | 1.00 | 0.66 | 0.52 | - | 1.00 | 0.68 | 0.54 | - | 1.00 | 0.74 | 0.60 | - |
| | | ΔT | 18.93 | 17.08 | 13.62 | - | 18.88 | 17.03 | 13.57 | - | 19.14 | 17.29 | 13.83 | - | 18.87 | 17.01 | 13.55 | - | 18.62 | 16.76 | 13.30 | - | 19.78 | 17.92 | 14.46 | - |
| 1800 | kW | 3.22 | 3.22 | 3.21 | - | 3.58 | 3.58 | 3.57 | - | 3.98 | 3.97 | 3.97 | - | 4.40 | 4.40 | 4.40 | - | 4.88 | 4.88 | 4.88 | - | 5.45 | 5.44 | 5.44 | - | |
| | Amps | 11.46 | 11.45 | 11.42 | - | 13.09 | 13.08 | 13.05 | - | 14.91 | 14.90 | 14.87 | - | 16.87 | 16.86 | 16.83 | - | 19.07 | 19.06 | 19.03 | - | 21.64 | 21.63 | 21.60 | - | |
| | Hi PR | 267 | 268 | 270 | - | 309 | 310 | 312 | - | 352 | 353 | 355 | - | 399 | 401 | 402 | - | 450 | 451 | 453 | - | 504 | 505 | 507 | - | |
| | Lo PR | 128 | 129 | 132 | - | 135 | 137 | 140 | - | 142 | 144 | 147 | - | 148 | 149 | 152 | - | 153 | 155 | 158 | - | 160 | 162 | 165 | - | |
| | MBh | 48.8 | 49.5 | 50.9 | - | 48.4 | 49.0 | 50.4 | - | 47.1 | 47.8 | 49.2 | - | 45.0 | 45.7 | 47.1 | - | 42.4 | 43.1 | 44.5 | - | 40.1 | 40.7 | 42.2 | - | |
| 75 | 1400 | S/T | 0.73 | 0.65 | 0.51 | - | 0.74 | 0.66 | 0.52 | - | 1.00 | 0.68 | 0.54 | - | 1.00 | 0.70 | 0.56 | - | 1.00 | 0.73 | 0.59 | - | 1.00 | 1.00 | 0.64 | - |
| | | ΔT | 17.61 | 15.76 | 12.29 | - | 17.56 | 15.71 | 12.24 | - | 17.82 | 15.97 | 12.50 | - | 17.54 | 15.69 | 12.22 | - | 17.29 | 15.44 | 11.98 | - | 18.46 | 16.60 | 13.14 | - |
| | | kW | 3.24 | 3.24 | 3.24 | - | 3.60 | 3.60 | 3.59 | - | 4.00 | 3.99 | 3.99 | - | 4.43 | 4.42 | 4.42 | - | 4.91 | 4.90 | 4.90 | - | 5.47 | 5.47 | 5.46 | - |
| | | Amps | 11.56 | 11.55 | 11.52 | - | 13.19 | 13.18 | 13.15 | - | 15.01 | 14.99 | 14.97 | - | 16.97 | 16.96 | 16.93 | - | 19.17 | 19.16 | 19.13 | - | 21.74 | 21.73 | 21.70 | - |
| | | Hi PR | 270 | 271 | 273 | - | 312 | 313 | 315 | - | 355 | 357 | 358 | - | 403 | 404 | 406 | - | 453 | 454 | 456 | - | 507 | 509 | 510 | - |
| | 1525 | Lo PR | 131 | 132 | 135 | - | 138 | 140 | 143 | - | 145 | 147 | 150 | - | 151 | 152 | 155 | - | 156 | 158 | 161 | - | 163 | 165 | 168 | - |
| | | MBh | 47.3 | 47.9 | 49.4 | 51.5 | 46.9 | 47.5 | 48.9 | 51.1 | 45.6 | 46.3 | 47.7 | 49.8 | 43.5 | 44.2 | 45.6 | 47.7 | 40.9 | 41.6 | 43.0 | 45.2 | 38.6 | 39.2 | 40.6 | 42.8 |
| | | S/T | 0.78 | 0.70 | 0.56 | 0.4 | 1.00 | 0.71 | 0.57 | 0.4 | 1.00 | 0.74 | 0.60 | 0.4 | 1.00 | 0.76 | 0.62 | 0.5 | 1.00 | 0.78 | 0.64 | 0.5 | 1.00 | 1.00 | 0.69 | 0.5 |
| | | ΔT | 23.72 | 21.87 | 18.40 | 14.8 | 23.67 | 21.82 | 18.35 | 14.8 | 23.93 | 22.08 | 18.61 | 15.0 | 23.65 | 21.80 | 18.33 | 14.7 | 23.40 | 21.55 | 18.09 | 14.5 | 24.57 | 22.71 | 19.25 | 15.7 |
| | | kW | 3.21 | 3.21 | 3.20 | 3.2 | 3.56 | 3.56 | 3.56 | 3.6 | 3.96 | 3.96 | 3.95 | 4.0 | 4.39 | 4.39 | 4.38 | 4.4 | 4.87 | 4.87 | 4.86 | 4.9 | 5.43 | 5.43 | 5.42 | 5.5 |
| 1800 | Amps | 11.40 | 11.39 | 11.36 | 11.5 | 13.03 | 13.02 | 12.99 | 13.1 | 14.84 | 14.83 | 14.80 | 14.9 | 16.81 | 16.80 | 16.77 | 16.9 | 19.00 | 18.99 | 18.96 | 19.1 | 21.58 | 21.57 | 21.54 | 21.7 | |
| | Hi PR | 266 | 267 | 269 | 273.2 | 307 | 308 | 310 | 314.9 | 351 | 352 | 354 | 358.7 | 398 | 399 | 401 | 405.8 | 449 | 450 | 452 | 456.5 | 503 | 504 | 506 | 510.7 | |
| | Lo PR | 126 | 128 | 131 | 136.5 | 134 | 136 | 139 | 144.2 | 141 | 142 | 146 | 150.9 | 146 | 148 | 151 | 156.6 | 152 | 154 | 157 | 162.1 | 159 | 161 | 164 | 169.1 | |
| | MBh | 47.7 | 48.4 | 49.8 | 51.9 | 47.3 | 47.9 | 49.3 | 51.5 | 46.0 | 46.7 | 48.1 | 50.3 | 43.9 | 44.6 | 46.0 | 48.2 | 41.4 | 42.0 | 43.4 | 45.6 | 39.0 | 39.7 | 41.1 | 43.2 | |
| | S/T | 0.82 | 0.74 | 0.60 | 0.5 | 1.00 | 0.75 | 0.61 | 0.5 | 1.00 | 0.77 | 0.63 | 0.5 | 1.00 | 0.79 | 0.65 | 0.5 | 1.00 | 0.80 | 0.68 | 0.5 | 1.00 | 1.00 | 0.73 | 0.6 | |
| 75 | 1400 | ΔT | 23.01 | 21.16 | 17.70 | 14.1 | 22.96 | 21.11 | 17.64 | 14.1 | 23.22 | 21.37 | 17.91 | 14.3 | 22.94 | 21.09 | 17.63 | 14.0 | 22.70 | 20.84 | 17.38 | 13.8 | 23.86 | 22.00 | 18.54 | 15.0 |
| | | kW | 3.22 | 3.22 | 3.21 | 3.2 | 3.58 | 3.57 | 3.57 | 3.6 | 3.97 | 3.97 | 3.96 | 4.0 | 4.40 | 4.40 | 4.39 | 4.4 | 4.88 | 4.88 | 4.87 | 4.9 | 5.44 | 5.44 | 5.44 | 5.5 |
| | | Amps | 11.45 | 11.44 | 11.41 | 11.5 | 13.08 | 13.07 | 13.04 | 13.2 | 14.90 | 14.88 | 14.86 | 15.0 | 16.86 | 16.85 | 16.82 | 16.9 | 19.06 | 19.05 | 19.02 | 19.1 | 21.63 | 21.62 | 21.59 | 21.7 |
| | | Hi PR | 267 | 268 | 270 | 274.6 | 309 | 310 | 312 | 316.4 | 353 | 354 | 356 | 360.1 | 400 | 401 | 403 | 407.2 | 450 | 452 | 453 | 458.0 | 505 | 506 | 508 | 512.2 |
| | | Lo PR | 128 | 129 | 132 | 137.8 | 135 | 137 | 140 | 145.4 | 142 | 144 | 147 | 152.1 | 148 | 149 | 152 | 157.8 | 153 | 155 | 158 | 163.4 | 160 | 162 | 165 | 170.3 |
| | 1525 | MBh | 48.8 | 49.5 | 50.9 | 53.0 | 48.4 | 49.1 | 50.5 | 52.6 | 47.2 | 47.8 | 49.2 | 51.4 | 45.1 | 45.7 | 47.1 | 49.3 | 42.5 | 43.1 | 44.5 | 46.7 | 40.1 | 40.8 | 42.2 | 44.3 |
| | | S/T | 0.86 | 0.78 | 0.64 | 0.5 | 1.00 | 0.79 | 0.65 | 0.5 | 1.00 | 0.82 | 0.68 | 0.5 | 1.00 | 0.84 | 0.70 | 0.5 | 1.00 | 0.86 | 0.72 | 0.6 | 1.00 | 1.00 | 0.77 | 0.6 |
| | | ΔT | 21.69 | 19.83 | 16.37 | 12.8 | 21.64 | 19.78 | 16.32 | 12.7 | 21.90 | 20.04 | 16.58 | 13.0 | 21.62 | 19.76 | 16.30 | 12.7 | 21.37 | 19.52 | 16.05 | 12.5 | 22.53 | 20.68 | 17.22 | 13.6 |
| | | kW | 3.24 | 3.24 | 3.23 | 3.3 | 3.60 | 3.59 | 3.59 | 3.6 | 3.99 | 3.99 | 3.99 | 4.0 | 4.42 | 4.42 | 4.42 | 4.4 | 4.90 | 4.90 | 4.89 | 4.9 | 5.47 | 5.46 | 5.46 | 5.5 |
| | | Amps | 11.55 | 11.54 | 11.51 | 11.6 | 13.18 | 13.17 | 13.14 | 13.3 | 15.00 | 14.98 | 14.96 | 15.1 | 16.96 | 16.95 | 16.92 | 17.0 | 19.16 | 19.14 | 19.12 | 19.2 | 21.73 | 21.72 | 21.69 | 21.8 |
| 1800 | Hi PR | 270 | 271 | 273 | 277.8 | 312 | 313 | 315 | 319.5 | 356 | 357 | 359 | 363.3 | 403 | 404 | 406 | 410.4 | 454 | 455 | 457 | 461.1 | 508 | 509 | 511 | 515.3 | |
| | Lo PR | 131 | 132 | 135 | 140.8 | 138 | 140 | 143 | 148.5 | 145 | 147 | 150 | 155.2 | 151 | 152 | 155 | 160.8 | 156 | 158 | 161 | 166.4 | 163 | 165 | 168 | 173.4 | |
| | MBh | 48.8 | 49.5 | 50.9 | 53.0 | 48.4 | 49.1 | 50.5 | 52.6 | 47.2 | 47.8 | 49.2 | 51.4 | 45.1 | 45.7 | 47.1 | 49.3 | 42.5 | 43.1 | 44.5 | 46.7 | 40.1 | 40.8 | 42.2 | 44.3 | |
| | S/T | 0.86 | 0.78 | 0.64 | 0.5 | 1.00 | 0.79 | 0.65 | 0.5 | 1.00 | 0.82 | 0.68 | 0.5 | 1.00 | 0.84 | 0.70 | 0.5 | 1.00 | 0.86 | 0.72 | 0.6 | 1.00 | 1.00 | 0.77 | 0.6 | |
| | ΔT | 21.69 | 19.83 | 16.37 | 12.8 | 21.64 | 19.78 | 16.32 | 12.7 | 21.90 | 20.04 | 16.58 | 13.0 | 21.62 | 19.76 | 16.30 | 12.7 | 21.37 | 19.52 | 16.05 | 12.5 | 22.53 | 20.68 | 17.22 | 13.6 | |

IDB: Entering Indoor Dry Bulb Temperature
 High and low pressures are measured at the liquid and suction access fittings.
 Shaded area reflects ACCA (TVA) conditions.
 Amps: Unit amps (comp.+ evaporator + condenser fan motors)
 kW = Total system power

| IDB | Airflow | Outdoor Ambient Temperature | | | | | | | | | | | | 105 | | | | | | | | | | | | 115 | | | | | | | | | | | |
|-------|---------|-----------------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|------|--|--|--|--|--|--|--|--|--|--|--|
| | | 65 | | | | 75 | | | | 85 | | | | 95 | | | | 105 | | | | 115 | | | | | | | | | | | | | | | |
| | | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | | | | | | | | | | | | |
| 80 | 1400 | MBh | 47.5 | 48.2 | 49.6 | 51.7 | 47.1 | 47.8 | 49.2 | 51.3 | 45.9 | 46.5 | 47.9 | 50.1 | 43.8 | 44.4 | 45.8 | 48.0 | 41.2 | 41.8 | 43.2 | 45.4 | 38.8 | 39.5 | 40.9 | 43.0 | | | | | | | | | | | |
| | | S/T | 1.00 | 0.83 | 0.69 | 0.5 | 1.00 | 0.84 | 0.70 | 0.6 | 1.00 | 0.87 | 0.73 | 0.6 | 1.00 | 1.00 | 0.75 | 0.6 | 1.00 | 1.00 | 0.77 | 0.6 | 1.00 | 1.00 | 0.82 | 0.7 | | | | | | | | | | | |
| | | ΔT | 27.83 | 25.97 | 22.51 | 18.9 | 27.78 | 25.92 | 22.46 | 18.9 | 28.04 | 26.18 | 22.72 | 19.1 | 27.76 | 25.90 | 22.44 | 18.9 | 27.51 | 25.66 | 22.19 | 18.6 | 28.67 | 26.82 | 23.35 | 19.8 | | | | | | | | | | | |
| | | kW | 3.21 | 3.21 | 3.20 | 3.2 | 3.57 | 3.56 | 3.56 | 3.6 | 3.96 | 3.96 | 3.95 | 4.0 | 4.39 | 4.39 | 4.38 | 4.4 | 4.87 | 4.87 | 4.86 | 4.9 | 5.44 | 5.43 | 5.43 | 5.5 | | | | | | | | | | | |
| | | Amps | 11.41 | 11.40 | 11.37 | 11.5 | 13.04 | 13.02 | 13.00 | 13.1 | 14.85 | 14.84 | 14.81 | 14.9 | 16.82 | 16.80 | 16.78 | 16.9 | 19.07 | 19.05 | 18.97 | 19.1 | 21.59 | 21.58 | 21.55 | 21.7 | | | | | | | | | | | |
| | Hi PR | 266 | 267 | 269 | 273.7 | 308 | 309 | 311 | 315.4 | 352 | 353 | 355 | 359.2 | 399 | 400 | 402 | 406.2 | 449 | 451 | 452 | 457.0 | 504 | 505 | 507 | 511.2 | | | | | | | | | | | | |
| | Lo PR | 127 | 129 | 132 | 137.1 | 135 | 136 | 139 | 144.8 | 141 | 143 | 146 | 151.5 | 147 | 149 | 152 | 157.1 | 153 | 154 | 157 | 162.7 | 160 | 161 | 164 | 169.6 | | | | | | | | | | | | |
| | 1525 | MBh | 47.9 | 48.6 | 50.0 | 52.2 | 47.5 | 48.2 | 49.6 | 51.7 | 46.3 | 47.0 | 48.4 | 50.5 | 44.2 | 44.8 | 46.2 | 48.4 | 41.6 | 42.3 | 43.7 | 45.8 | 39.2 | 39.9 | 41.3 | 43.5 | | | | | | | | | | | |
| | | S/T | 1.00 | 0.87 | 0.73 | 0.6 | 1.00 | 0.88 | 0.74 | 0.6 | 1.00 | 0.90 | 0.76 | 0.6 | 1.00 | 1.00 | 0.78 | 0.6 | 1.00 | 1.00 | 0.81 | 0.7 | 1.00 | 1.00 | 0.86 | 0.7 | | | | | | | | | | | |
| | | ΔT | 27.12 | 25.26 | 21.80 | 18.2 | 27.07 | 25.21 | 21.75 | 18.2 | 27.33 | 25.47 | 22.01 | 18.4 | 27.05 | 25.19 | 21.73 | 18.1 | 26.80 | 24.95 | 21.48 | 17.9 | 27.96 | 26.11 | 22.64 | 19.1 | | | | | | | | | | | |
| kW | | 3.22 | 3.22 | 3.21 | 3.2 | 3.58 | 3.58 | 3.57 | 3.6 | 3.97 | 3.97 | 3.97 | 4.0 | 4.40 | 4.40 | 4.40 | 4.4 | 4.88 | 4.88 | 4.88 | 4.9 | 5.45 | 5.44 | 5.44 | 5.5 | | | | | | | | | | | | |
| Amps | | 11.46 | 11.45 | 11.42 | 11.5 | 13.09 | 13.08 | 13.05 | 13.2 | 14.91 | 14.89 | 14.87 | 15.0 | 16.87 | 16.86 | 16.83 | 17.0 | 19.07 | 19.05 | 18.93 | 19.2 | 21.64 | 21.63 | 21.60 | 21.7 | | | | | | | | | | | | |
| Hi PR | 268 | 269 | 271 | 275.1 | 309 | 310 | 312 | 316.9 | 353 | 354 | 356 | 360.6 | 400 | 401 | 403 | 407.7 | 451 | 452 | 454 | 458.5 | 505 | 506 | 508 | 512.7 | | | | | | | | | | | | | |
| Lo PR | 128 | 130 | 133 | 138.3 | 136 | 137 | 141 | 146.0 | 143 | 144 | 147 | 152.7 | 148 | 150 | 153 | 158.4 | 154 | 155 | 159 | 163.9 | 161 | 162 | 166 | 170.9 | | | | | | | | | | | | | |
| 1800 | MBh | 49.1 | 49.7 | 51.1 | 53.3 | 48.6 | 49.3 | 50.7 | 52.9 | 47.4 | 48.1 | 49.5 | 51.6 | 45.3 | 46.0 | 47.4 | 49.5 | 42.7 | 43.4 | 44.8 | 46.9 | 40.4 | 41.0 | 42.4 | 44.6 | | | | | | | | | | | | |
| | S/T | 1.00 | 0.91 | 0.77 | 0.6 | 1.00 | 0.92 | 0.78 | 0.6 | 1.00 | 1.00 | 0.81 | 0.7 | 1.00 | 1.00 | 0.83 | 0.7 | 1.00 | 1.00 | 0.85 | 0.7 | 1.00 | 1.00 | 1.00 | 0.8 | | | | | | | | | | | | |
| | ΔT | 25.80 | 23.94 | 20.48 | 16.9 | 25.74 | 23.89 | 20.43 | 16.8 | 26.01 | 24.15 | 20.69 | 17.1 | 25.73 | 23.87 | 20.41 | 16.8 | 25.48 | 23.62 | 20.16 | 16.6 | 26.64 | 24.78 | 21.32 | 17.7 | | | | | | | | | | | | |
| | kW | 3.24 | 3.24 | 3.24 | 3.3 | 3.60 | 3.60 | 3.59 | 3.6 | 4.00 | 3.99 | 3.99 | 4.0 | 4.43 | 4.42 | 4.42 | 4.4 | 4.91 | 4.90 | 4.90 | 4.9 | 5.47 | 5.47 | 5.46 | 5.5 | | | | | | | | | | | | |
| | Amps | 11.56 | 11.55 | 11.52 | 11.6 | 13.19 | 13.18 | 13.15 | 13.3 | 15.00 | 14.99 | 14.96 | 15.1 | 16.97 | 16.96 | 16.93 | 17.1 | 19.17 | 19.15 | 19.13 | 19.2 | 21.74 | 21.73 | 21.70 | 21.8 | | | | | | | | | | | | |
| Hi PR | 271 | 272 | 274 | 278.3 | 312 | 314 | 315 | 320.0 | 356 | 357 | 359 | 363.8 | 403 | 404 | 406 | 410.9 | 454 | 455 | 457 | 461.6 | 508 | 509 | 511 | 515.8 | | | | | | | | | | | | | |
| Lo PR | 131 | 133 | 136 | 141.4 | 139 | 140 | 144 | 149.0 | 146 | 147 | 150 | 155.7 | 151 | 153 | 156 | 161.4 | 157 | 158 | 162 | 167.0 | 164 | 165 | 169 | 173.9 | | | | | | | | | | | | | |

| | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|------|
| 85 | 1400 | MBh | 48.3 | 49.0 | 50.4 | 52.5 | 47.9 | 48.6 | 50.0 | 52.1 | 46.7 | 47.3 | 48.7 | 50.9 | 44.6 | 45.2 | 46.6 | 48.8 | 42.0 | 42.6 | 44.0 | 46.2 | 39.6 | 40.3 | 41.7 | 43.8 |
| | | S/T | 1.00 | 0.94 | 0.80 | 0.7 | 1.00 | 1.00 | 0.80 | 0.7 | 1.00 | 1.00 | 0.83 | 0.7 | 1.00 | 1.00 | 0.85 | 0.7 | 1.00 | 1.00 | 1.00 | 0.7 | 1.00 | 1.00 | 1.00 | 0.8 |
| | | ΔT | 31.47 | 29.61 | 26.15 | 22.6 | 31.42 | 29.56 | 26.10 | 22.5 | 31.68 | 29.82 | 26.36 | 22.8 | 31.40 | 29.54 | 26.08 | 22.5 | 31.15 | 29.30 | 25.83 | 22.2 | 32.31 | 30.46 | 26.99 | 23.4 |
| | | kW | 3.22 | 3.21 | 3.21 | 3.2 | 3.57 | 3.57 | 3.56 | 3.6 | 3.97 | 3.97 | 3.96 | 4.0 | 4.40 | 4.40 | 4.39 | 4.4 | 4.88 | 4.88 | 4.87 | 4.9 | 5.44 | 5.44 | 5.43 | 5.5 |
| | | Amps | 11.44 | 11.43 | 11.40 | 11.5 | 13.07 | 13.05 | 13.03 | 13.2 | 14.88 | 14.87 | 14.84 | 15.0 | 16.85 | 16.84 | 16.81 | 16.9 | 19.04 | 19.03 | 19.00 | 19.1 | 21.62 | 21.61 | 21.58 | 21.7 |
| | Hi PR | 267 | 268 | 270 | 274.9 | 309 | 310 | 312 | 316.7 | 353 | 354 | 356 | 360.4 | 400 | 401 | 403 | 407.5 | 451 | 452 | 454 | 458.3 | 505 | 506 | 508 | 512.4 | |
| | Lo PR | 129 | 130 | 134 | 139.0 | 137 | 138 | 141 | 146.6 | 143 | 145 | 148 | 153.3 | 149 | 150 | 154 | 159.0 | 154 | 156 | 159 | 164.6 | 161 | 163 | 166 | 171.5 | |
| | 1525 | MBh | 48.7 | 49.4 | 50.8 | 53.0 | 48.3 | 49.0 | 50.4 | 52.5 | 47.1 | 47.8 | 49.2 | 51.3 | 45.0 | 45.6 | 47.0 | 49.2 | 42.4 | 43.1 | 44.5 | 46.6 | 40.0 | 40.7 | 42.1 | 44.2 |
| | | S/T | 1.00 | 0.97 | 0.83 | 0.7 | 1.00 | 1.00 | 0.84 | 0.7 | 1.00 | 1.00 | 0.87 | 0.7 | 1.00 | 1.00 | 0.89 | 0.7 | 1.00 | 1.00 | 1.00 | 0.8 | 1.00 | 1.00 | 1.00 | 0.8 |
| | | ΔT | 30.76 | 28.91 | 25.44 | 21.9 | 30.71 | 28.85 | 25.39 | 21.8 | 30.97 | 29.12 | 25.65 | 22.1 | 30.69 | 28.84 | 25.37 | 21.8 | 30.44 | 28.59 | 25.12 | 21.5 | 31.60 | 29.75 | 26.29 | 22.7 |
| kW | | 3.23 | 3.23 | 3.22 | 3.2 | 3.58 | 3.58 | 3.58 | 3.6 | 3.98 | 3.98 | 3.97 | 4.0 | 4.41 | 4.41 | 4.40 | 4.4 | 4.89 | 4.89 | 4.88 | 4.9 | 5.45 | 5.45 | 5.44 | 5.5 | |
| Amps | | 11.49 | 11.48 | 11.45 | 11.6 | 13.12 | 13.11 | 13.08 | 13.2 | 14.94 | 14.92 | 14.90 | 15.0 | 16.90 | 16.89 | 16.86 | 17.0 | 19.10 | 19.09 | 19.06 | 19.2 | 21.67 | 21.66 | 21.63 | 21.8 | |
| Hi PR | 269 | 270 | 272 | 276.4 | 311 | 312 | 314 | 318.1 | 354 | 355 | 357 | 361.9 | 401 | 402 | 404 | 408.9 | 452 | 453 | 455 | 459.7 | 506 | 507 | 509 | 513.9 | | |
| Lo PR | 130 | 132 | 135 | 140.2 | 138 | 139 | 143 | 147.9 | 144 | 146 | 149 | 154.6 | 150 | 152 | 155 | 160.2 | 156 | 157 | 160 | 165.8 | 163 | 164 | 167 | 172.8 | | |
| 1800 | MBh | 49.9 | 50.5 | 51.9 | 54.1 | 49.4 | 50.1 | 51.5 | 53.6 | 48.2 | 48.9 | 50.3 | 52.4 | 46.1 | 46.8 | 48.2 | 50.3 | 43.5 | 44.2 | 45.6 | 47.7 | 41.1 | 41.8 | 43.2 | 45.4 | |
| | S/T | 1.00 | 1.00 | 0.88 | 0.7 | 1.00 | 1.00 | 0.88 | 0.7 | 1.00 | 1.00 | 0.91 | 0.8 | 1.00 | 1.00 | 0.93 | 0.8 | 1.00 | 1.00 | 1.00 | 0.8 | 1.00 | 1.00 | 1.00 | 0.9 | |
| | ΔT | 29.44 | 27.58 | 24.12 | 20.5 | 29.39 | 27.53 | 24.07 | 20.5 | 29.65 | 27.79 | 24.33 | 20.7 | 29.37 | 27.51 | 24.05 | 20.5 | 29.12 | 27.26 | 23.80 | 20.2 | 30.28 | 28.43 | 24.96 | 21.4 | |
| | kW | 3.25 | 3.25 | 3.24 | 3.3 | 3.61 | 3.60 | 3.60 | 3.6 | 4.00 | 4.00 | 3.99 | 4.0 | 4.43 | 4.43 | 4.42 | 4.5 | 4.91 | 4.91 | 4.90 | 4.9 | 5.48 | 5.47 | 5.47 | 5.5 | |
| | Amps | 11.59 | 11.58 | 11.55 | 11.7 | 13.22 | 13.21 | 13.18 | 13.3 | 15.04 | 15.02 | 15.00 | 15.1 | 17.00 | 16.99 | 16.96 | 17.1 | 19.20 | 19.18 | 19.16 | 19.3 | 21.77 | 21.76 | 21.73 | 21.9 | |
| Hi PR | 272 | 273 | 275 | 279.5 | 314 | 315 | 317 | 321.3 | 357 | 359 | 360 | 365.0 | 404 | 406 | 407 | 412.1 | 455 | 456 | 458 | 462.9 | 509 | 511 | 512 | 517.1 | | |
| Lo PR | 133 | 135 | 138 | 143.3 | 141 | 142 | 146 | 150.9 | 147 | 149 | 152 | 157.6 | 153 | 155 | 158 | 163.3 | 159 | 160 | 163 | 168.8 | 166 | 167 | 170 | 175.8 | | |

IDB: Entering Indoor Dry Bulb Temperature
 High and low pressures are measured at the liquid and suction access fittings.
 Shaded area reflects AHRI (TVA) conditions.
 Amps: Unit: amps (comp.+ evaporator + condenser fan motors)
 kW = Total system power

| IDB | Airflow | Outdoor Ambient Temperature | | | | | | | | | | | | | | | | | | | | | | | |
|-----------|---------|-----------------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|----|
| | | 65 | | | | 75 | | | | 85 | | | | 95 | | | | 105 | | | | 115 | | | |
| | | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 |
| 70 | MBh | 41.1 | 41.7 | 42.9 | - | 40.7 | 41.3 | 42.5 | - | 39.6 | 40.2 | 41.4 | - | 37.8 | 38.4 | 39.6 | - | 35.5 | 36.1 | 37.3 | - | 33.5 | 34.0 | 35.3 | - |
| | S/T | 0.62 | 0.54 | 0.40 | - | 0.63 | 0.55 | 0.41 | - | 0.65 | 0.57 | 0.43 | - | 1.00 | 0.59 | 0.45 | - | 1.00 | 0.62 | 0.48 | - | 1.00 | 0.67 | 0.53 | - |
| | ΔT | 20.34 | 18.47 | 14.99 | - | 20.29 | 18.42 | 14.94 | - | 20.55 | 18.68 | 15.20 | - | 20.27 | 18.40 | 14.92 | - | 20.02 | 18.15 | 14.67 | - | 21.18 | 19.32 | 15.84 | - |
| | KW | 2.31 | 2.31 | 2.31 | - | 2.57 | 2.57 | 2.57 | - | 2.86 | 2.86 | 2.85 | - | 3.17 | 3.17 | 3.17 | - | 3.52 | 3.52 | 3.52 | - | 3.93 | 3.93 | 3.93 | - |
| | Amps | 7.74 | 7.73 | 7.71 | - | 8.87 | 8.86 | 8.84 | - | 10.12 | 10.12 | 10.10 | - | 11.48 | 11.48 | 11.46 | - | 13.00 | 13.00 | 12.98 | - | 14.79 | 14.78 | 14.76 | - |
| | Hi-PR | 264 | 265 | 267 | - | 306 | 307 | 309 | - | 349 | 351 | 352 | - | 397 | 398 | 400 | - | 447 | 448 | 450 | - | 501 | 503 | 504 | - |
| | Lo-PR | 125 | 126 | 129 | - | 132 | 134 | 137 | - | 139 | 140 | 144 | - | 145 | 146 | 149 | - | 150 | 152 | 155 | - | 157 | 158 | 162 | - |
| | MBh | 41.7 | 42.3 | 43.5 | - | 41.3 | 41.9 | 43.1 | - | 40.2 | 40.8 | 42.1 | - | 38.4 | 39.0 | 40.2 | - | 36.1 | 36.7 | 37.9 | - | 34.1 | 34.7 | 35.9 | - |
| | S/T | 0.69 | 0.61 | 0.47 | - | 0.70 | 0.62 | 0.48 | - | 0.73 | 0.65 | 0.51 | - | 1.00 | 0.67 | 0.53 | - | 1.00 | 0.69 | 0.55 | - | 1.00 | 0.74 | 0.60 | - |
| | ΔT | 19.03 | 17.16 | 13.68 | - | 18.98 | 17.11 | 13.63 | - | 19.24 | 17.38 | 13.90 | - | 18.96 | 17.09 | 13.61 | - | 18.71 | 16.85 | 13.37 | - | 19.88 | 18.01 | 14.53 | - |
| KW | 2.33 | 2.33 | 2.32 | - | 2.59 | 2.59 | 2.58 | - | 2.88 | 2.87 | 2.87 | - | 3.19 | 3.19 | 3.18 | - | 3.54 | 3.54 | 3.53 | - | 3.95 | 3.95 | 3.94 | - | |
| Amps | 7.81 | 7.80 | 7.78 | - | 8.93 | 8.93 | 8.91 | - | 10.19 | 10.18 | 10.16 | - | 11.55 | 11.54 | 11.52 | - | 13.07 | 13.06 | 13.04 | - | 14.86 | 14.85 | 14.83 | - | |
| Hi-PR | 267 | 268 | 270 | - | 308 | 310 | 311 | - | 352 | 353 | 355 | - | 399 | 400 | 402 | - | 450 | 451 | 453 | - | 504 | 505 | 507 | - | |
| Lo-PR | 127 | 128 | 131 | - | 134 | 136 | 139 | - | 141 | 143 | 146 | - | 147 | 148 | 151 | - | 152 | 154 | 157 | - | 159 | 161 | 164 | - | |
| MBh | 42.3 | 42.9 | 44.1 | - | 41.9 | 42.5 | 43.7 | - | 40.8 | 41.4 | 42.6 | - | 39.0 | 39.6 | 40.8 | - | 36.7 | 37.3 | 38.5 | - | 34.7 | 35.2 | 36.5 | - | |
| S/T | 0.73 | 0.65 | 0.51 | - | 0.73 | 0.65 | 0.51 | - | 0.76 | 0.68 | 0.54 | - | 1.00 | 0.70 | 0.56 | - | 1.00 | 0.72 | 0.58 | - | 1.00 | 0.78 | 0.64 | - | |
| ΔT | 18.16 | 16.29 | 12.81 | - | 18.11 | 16.24 | 12.76 | - | 18.37 | 16.50 | 13.02 | - | 18.09 | 16.22 | 12.74 | - | 17.84 | 15.97 | 12.49 | - | 19.01 | 17.14 | 13.66 | - | |
| KW | 2.84 | 2.84 | 2.83 | - | 2.60 | 2.60 | 2.59 | - | 2.89 | 2.88 | 2.88 | - | 3.20 | 3.20 | 3.19 | - | 3.55 | 3.55 | 3.54 | - | 3.96 | 3.96 | 3.95 | - | |
| Amps | 7.85 | 7.84 | 7.83 | - | 8.98 | 8.97 | 8.95 | - | 10.24 | 10.23 | 10.21 | - | 11.60 | 11.59 | 11.57 | - | 13.12 | 13.11 | 13.09 | - | 14.90 | 14.89 | 14.87 | - | |
| Hi-PR | 269 | 270 | 272 | - | 310 | 311 | 313 | - | 354 | 355 | 357 | - | 401 | 402 | 404 | - | 452 | 453 | 455 | - | 506 | 507 | 509 | - | |
| Lo-PR | 129 | 130 | 133 | - | 136 | 138 | 141 | - | 143 | 144 | 148 | - | 148 | 150 | 153 | - | 154 | 156 | 159 | - | 161 | 162 | 166 | - | |

| | | | | | | | | | | | | | | | | | | | | | | | | | |
|-----------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| 75 | MBh | 41.1 | 41.7 | 42.9 | 44.8 | 40.7 | 41.3 | 42.5 | 44.4 | 39.7 | 40.2 | 41.5 | 43.3 | 37.8 | 38.4 | 39.6 | 41.5 | 35.6 | 36.1 | 37.4 | 39.2 | 33.5 | 34.1 | 35.3 | 37.2 |
| | S/T | 0.75 | 0.67 | 0.53 | 0.38 | 0.76 | 0.68 | 0.54 | 0.39 | 1.00 | 0.71 | 0.57 | 0.42 | 1.00 | 0.73 | 0.59 | 0.44 | 1.00 | 0.75 | 0.61 | 0.46 | 1.00 | 1.00 | 0.66 | 0.51 |
| | ΔT | 24.43 | 22.57 | 19.09 | 15.48 | 24.38 | 22.52 | 19.04 | 15.43 | 24.65 | 22.78 | 19.30 | 15.70 | 24.36 | 22.50 | 19.02 | 15.41 | 24.12 | 22.25 | 18.77 | 15.17 | 25.28 | 23.42 | 19.94 | 16.33 |
| | KW | 2.31 | 2.31 | 2.30 | 2.32 | 2.57 | 2.57 | 2.56 | 2.58 | 2.86 | 2.86 | 2.85 | 2.87 | 3.17 | 3.17 | 3.17 | 3.19 | 3.52 | 3.52 | 3.52 | 3.53 | 3.93 | 3.93 | 3.93 | 3.95 |
| | Amps | 7.73 | 7.72 | 7.71 | 7.79 | 8.86 | 8.85 | 8.83 | 8.92 | 10.12 | 10.11 | 10.09 | 10.17 | 11.48 | 11.47 | 11.45 | 11.54 | 13.00 | 12.99 | 12.97 | 13.06 | 14.78 | 14.77 | 14.75 | 14.84 |
| | Hi-PR | 264 | 265 | 267 | 272 | 306 | 307 | 309 | 314 | 350 | 351 | 353 | 357 | 397 | 398 | 400 | 404 | 448 | 449 | 451 | 455 | 502 | 503 | 505 | 509 |
| | Lo-PR | 125 | 126 | 129 | 135 | 132 | 134 | 137 | 142 | 139 | 140 | 144 | 149 | 145 | 146 | 149 | 155 | 150 | 152 | 155 | 160 | 157 | 159 | 162 | 167 |
| | MBh | 41.7 | 42.3 | 43.5 | 45.4 | 41.3 | 41.9 | 43.2 | 45.0 | 40.3 | 40.8 | 42.1 | 44.0 | 38.4 | 39.0 | 40.2 | 42.1 | 36.2 | 36.7 | 38.0 | 39.8 | 34.1 | 34.7 | 35.9 | 37.8 |
| | S/T | 0.83 | 0.75 | 0.61 | 0.46 | 1.00 | 0.76 | 0.61 | 0.47 | 1.00 | 0.78 | 0.64 | 0.49 | 1.00 | 0.80 | 0.66 | 0.51 | 1.00 | 0.82 | 0.68 | 0.53 | 1.00 | 1.00 | 0.74 | 0.59 |
| | ΔT | 23.13 | 21.26 | 17.78 | 14.18 | 23.08 | 21.21 | 17.73 | 14.13 | 23.34 | 21.47 | 17.99 | 14.39 | 23.06 | 21.19 | 17.71 | 14.11 | 22.81 | 20.94 | 17.46 | 13.86 | 23.98 | 22.11 | 18.63 | 15.03 |
| KW | 2.33 | 2.32 | 2.32 | 2.34 | 2.59 | 2.58 | 2.58 | 2.60 | 2.87 | 2.87 | 2.87 | 2.89 | 3.19 | 3.19 | 3.18 | 3.20 | 3.54 | 3.54 | 3.53 | 3.55 | 3.95 | 3.95 | 3.94 | 3.96 | |
| Amps | 7.80 | 7.79 | 7.77 | 7.86 | 8.93 | 8.92 | 8.90 | 8.99 | 10.18 | 10.18 | 10.16 | 10.24 | 11.55 | 11.54 | 11.52 | 11.60 | 13.07 | 13.06 | 13.04 | 13.12 | 14.85 | 14.84 | 14.82 | 14.91 | |
| Hi-PR | 267 | 268 | 270 | 274 | 309 | 310 | 312 | 316 | 352 | 353 | 355 | 360 | 399 | 401 | 402 | 407 | 450 | 451 | 453 | 458 | 504 | 505 | 507 | 512 | |
| Lo-PR | 127 | 128 | 131 | 137 | 134 | 136 | 139 | 144 | 141 | 143 | 146 | 151 | 147 | 148 | 151 | 157 | 152 | 154 | 157 | 162 | 159 | 161 | 164 | 169 | |
| MBh | 42.3 | 42.9 | 44.1 | 46.0 | 41.9 | 42.5 | 43.7 | 45.6 | 40.9 | 41.4 | 42.7 | 44.5 | 39.0 | 39.6 | 40.8 | 42.7 | 36.7 | 37.3 | 38.6 | 40.4 | 34.7 | 35.3 | 36.5 | 38.4 | |
| S/T | 0.86 | 0.78 | 0.64 | 0.49 | 1.00 | 0.79 | 0.65 | 0.50 | 1.00 | 0.81 | 0.67 | 0.52 | 1.00 | 0.83 | 0.69 | 0.54 | 1.00 | 1.00 | 0.72 | 0.57 | 1.00 | 1.00 | 0.77 | 0.62 | |
| ΔT | 22.26 | 20.39 | 16.91 | 13.31 | 22.20 | 20.34 | 16.86 | 13.25 | 22.47 | 20.60 | 17.12 | 13.52 | 22.19 | 20.32 | 16.84 | 13.24 | 21.94 | 20.07 | 16.59 | 12.99 | 23.10 | 21.24 | 17.76 | 14.15 | |
| KW | 2.34 | 2.33 | 2.33 | 2.35 | 2.60 | 2.59 | 2.59 | 2.61 | 2.88 | 2.88 | 2.88 | 2.90 | 3.20 | 3.20 | 3.19 | 3.21 | 3.55 | 3.55 | 3.54 | 3.56 | 3.96 | 3.96 | 3.95 | 3.97 | |
| Amps | 7.85 | 7.84 | 7.82 | 7.90 | 8.97 | 8.96 | 8.94 | 9.03 | 10.23 | 10.22 | 10.20 | 10.29 | 11.59 | 11.58 | 11.56 | 11.65 | 13.11 | 13.10 | 13.08 | 13.17 | 14.89 | 14.88 | 14.87 | 14.95 | |
| Hi-PR | 269 | 270 | 272 | 276 | 311 | 312 | 314 | 318 | 354 | 355 | 357 | 362 | 401 | 403 | 404 | 409 | 452 | 453 | 455 | 460 | 506 | 507 | 509 | 514 | |
| Lo-PR | 129 | 130 | 133 | 139 | 136 | 138 | 141 | 146 | 143 | 144 | 148 | 153 | 148 | 150 | 153 | 159 | 154 | 156 | 159 | 164 | 161 | 162 | 166 | 171 | |

IDB: Entering Indoor Dry Bulb Temperature
 High and low pressures are measured at the liquid and suction access fittings.
 Shaded area reflects ACCA (TVA) conditions.
 Amps: Unit amps (comp. + evaporator + condenser fan motors)
 kW = Total system power

| IDB | Airflow | Outdoor Ambient Temperature | | | | | | | | | | | | | | | | | | | | | | | |
|-----------|---------|-----------------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|--------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| | | 65 | | | | 75 | | | | 85 | | | | 105 | | | | 115 | | | | | | | |
| | | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | | | | |
| 80 | MBh | 41.3 | 41.9 | 43.1 | 45.0 | 40.9 | 41.5 | 42.8 | 44.6 | 39.9 | 40.5 | 41.7 | 43.6 | 38.0 | 38.6 | 39.8 | 41.7 | 35.8 | 36.3 | 37.6 | 39.5 | 33.7 | 34.3 | 35.5 | 37.4 |
| | S/T | 1.00 | 0.81 | 0.66 | 0.52 | 1.00 | 0.81 | 0.67 | 0.52 | 1.00 | 0.84 | 0.70 | 0.55 | 1.00 | 1.00 | 0.72 | 0.57 | 1.00 | 1.00 | 0.74 | 0.59 | 1.00 | 1.00 | 0.79 | 0.64 |
| | ΔT | 28.56 | 26.70 | 23.22 | 19.61 | 28.51 | 26.65 | 23.17 | 19.56 | 28.77 | 26.91 | 23.43 | 19.82 | 28.49 | 26.63 | 23.15 | 19.54 | 28.24 | 26.38 | 22.90 | 19.29 | 29.41 | 27.54 | 24.06 | 20.46 |
| | KW | 2.31 | 2.31 | 2.31 | 2.33 | 2.57 | 2.57 | 2.56 | 2.58 | 2.86 | 2.86 | 2.85 | 2.87 | 3.17 | 3.17 | 3.17 | 3.19 | 3.52 | 3.52 | 3.52 | 3.54 | 3.93 | 3.93 | 3.93 | 3.95 |
| | Amps | 7.74 | 7.73 | 7.71 | 7.80 | 8.87 | 8.86 | 8.84 | 8.92 | 10.12 | 10.11 | 10.09 | 10.18 | 11.48 | 11.47 | 11.46 | 11.54 | 13.00 | 12.99 | 12.98 | 13.06 | 14.79 | 14.78 | 14.76 | 14.84 |
| | Hi-PR | 265 | 266 | 268 | 272 | 306 | 308 | 310 | 314 | 350 | 351 | 353 | 358 | 397 | 398 | 400 | 405 | 448 | 449 | 451 | 456 | 502 | 503 | 505 | 510 |
| | Lo-PR | 125 | 127 | 130 | 135 | 133 | 134 | 138 | 143 | 139 | 141 | 144 | 150 | 145 | 147 | 150 | 155 | 151 | 152 | 155 | 161 | 158 | 159 | 162 | 168 |
| | MBh | 41.9 | 42.5 | 43.7 | 45.6 | 41.6 | 42.1 | 43.4 | 45.2 | 40.5 | 41.1 | 42.3 | 44.2 | 38.6 | 39.2 | 40.4 | 42.3 | 36.4 | 37.0 | 38.2 | 40.1 | 34.3 | 34.9 | 36.1 | 38.0 |
| | S/T | 1.00 | 0.88 | 0.74 | 0.59 | 1.00 | 0.89 | 0.74 | 0.60 | 1.00 | 0.91 | 0.77 | 0.62 | 1.00 | 1.00 | 0.79 | 0.64 | 1.00 | 1.00 | 0.81 | 0.67 | 1.00 | 1.00 | 0.87 | 0.72 |
| | ΔT | 27.25 | 25.39 | 21.91 | 18.30 | 27.20 | 25.34 | 21.86 | 18.25 | 27.46 | 25.60 | 22.12 | 18.51 | 27.18 | 25.32 | 21.84 | 18.23 | 26.93 | 25.07 | 21.59 | 17.98 | 28.10 | 26.24 | 22.76 | 19.15 |
| KW | 2.33 | 2.33 | 2.32 | 2.34 | 2.59 | 2.58 | 2.58 | 2.60 | 2.88 | 2.87 | 2.87 | 2.89 | 3.19 | 3.19 | 3.18 | 3.20 | 3.54 | 3.54 | 3.53 | 3.55 | 3.95 | 3.95 | 3.94 | 3.96 | |
| Amps | 7.81 | 7.80 | 7.78 | 7.87 | 8.93 | 8.92 | 8.91 | 8.99 | 10.19 | 10.18 | 10.16 | 10.25 | 11.55 | 11.54 | 11.52 | 11.61 | 13.07 | 13.06 | 13.04 | 13.13 | 14.85 | 14.85 | 14.83 | 14.91 | |
| Hi-PR | 267 | 269 | 270 | 275 | 309 | 310 | 312 | 317 | 353 | 354 | 356 | 360 | 400 | 401 | 403 | 407 | 451 | 452 | 454 | 458 | 505 | 506 | 508 | 512 | |
| Lo-PR | 127 | 129 | 132 | 137 | 135 | 136 | 140 | 145 | 142 | 143 | 146 | 152 | 147 | 149 | 152 | 157 | 153 | 154 | 157 | 163 | 160 | 161 | 164 | 170 | |
| MBh | 42.5 | 43.1 | 44.3 | 46.2 | 42.1 | 42.7 | 44.0 | 45.8 | 41.1 | 41.7 | 42.9 | 44.8 | 39.2 | 39.8 | 41.0 | 42.9 | 37.0 | 37.5 | 38.8 | 40.7 | 34.9 | 35.5 | 36.7 | 38.6 | |
| S/T | 1.00 | 0.91 | 0.77 | 0.62 | 1.00 | 0.92 | 0.78 | 0.63 | 1.00 | 0.95 | 0.80 | 0.66 | 1.00 | 1.00 | 0.82 | 0.68 | 1.00 | 1.00 | 0.85 | 0.70 | 1.00 | 1.00 | 0.90 | 0.75 | |
| ΔT | 26.38 | 24.52 | 21.04 | 17.43 | 26.33 | 24.47 | 20.99 | 17.38 | 26.59 | 24.73 | 21.25 | 17.64 | 26.31 | 24.45 | 20.97 | 17.36 | 26.06 | 24.20 | 20.72 | 17.11 | 27.23 | 25.37 | 21.89 | 18.28 | |
| KW | 2.34 | 2.34 | 2.33 | 2.35 | 2.60 | 2.60 | 2.59 | 2.61 | 2.89 | 2.88 | 2.88 | 2.90 | 3.20 | 3.20 | 3.19 | 3.21 | 3.55 | 3.55 | 3.54 | 3.56 | 3.96 | 3.96 | 3.95 | 3.97 | |
| Amps | 7.85 | 7.84 | 7.82 | 7.91 | 8.98 | 8.97 | 8.95 | 9.04 | 10.24 | 10.23 | 10.21 | 10.29 | 11.60 | 11.59 | 11.57 | 11.65 | 13.12 | 13.11 | 13.09 | 13.17 | 14.90 | 14.89 | 14.87 | 14.96 | |
| Hi-PR | 269 | 270 | 272 | 277 | 311 | 312 | 314 | 319 | 355 | 356 | 358 | 362 | 402 | 403 | 405 | 409 | 453 | 454 | 456 | 460 | 507 | 508 | 510 | 514 | |
| Lo-PR | 129 | 131 | 134 | 139 | 137 | 138 | 141 | 147 | 143 | 145 | 148 | 153 | 149 | 151 | 154 | 159 | 155 | 156 | 159 | 165 | 161 | 163 | 166 | 172 | |

| | | | | | | | | | | | | | | | | | | | | | | | | | |
|-----------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| 85 | MBh | 42.0 | 42.6 | 43.8 | 45.7 | 41.6 | 42.2 | 43.4 | 45.3 | 40.6 | 41.1 | 42.4 | 44.3 | 38.7 | 39.3 | 40.5 | 42.4 | 36.5 | 37.0 | 38.3 | 40.1 | 34.4 | 35.0 | 36.2 | 38.1 |
| | S/T | 1.00 | 0.91 | 0.77 | 0.62 | 1.00 | 1.00 | 0.78 | 0.63 | 1.00 | 1.00 | 0.80 | 0.65 | 1.00 | 1.00 | 0.82 | 0.67 | 1.00 | 1.00 | 0.85 | 0.70 | 1.00 | 1.00 | 0.90 | 0.75 |
| | ΔT | 32.22 | 30.36 | 26.88 | 23.27 | 32.17 | 30.31 | 26.83 | 23.22 | 32.43 | 30.57 | 27.09 | 23.48 | 32.15 | 30.29 | 26.81 | 23.20 | 31.90 | 30.04 | 26.56 | 22.95 | 33.07 | 31.20 | 27.72 | 24.12 |
| | KW | 2.32 | 2.32 | 2.31 | 2.33 | 2.58 | 2.57 | 2.57 | 2.59 | 2.87 | 2.86 | 2.86 | 2.88 | 3.18 | 3.18 | 3.17 | 3.19 | 3.53 | 3.53 | 3.52 | 3.54 | 3.94 | 3.94 | 3.93 | 3.95 |
| | Amps | 7.76 | 7.75 | 7.73 | 7.82 | 8.89 | 8.88 | 8.86 | 8.95 | 10.14 | 10.14 | 10.12 | 10.20 | 11.50 | 11.50 | 11.48 | 11.56 | 13.02 | 13.02 | 13.00 | 13.08 | 14.81 | 14.80 | 14.78 | 14.87 |
| | Hi-PR | 266 | 267 | 269 | 274 | 308 | 309 | 311 | 315 | 351 | 353 | 354 | 359 | 399 | 400 | 402 | 406 | 449 | 450 | 452 | 457 | 503 | 505 | 506 | 511 |
| | Lo-PR | 127 | 129 | 132 | 137 | 135 | 136 | 139 | 145 | 141 | 143 | 146 | 151 | 147 | 149 | 152 | 157 | 152 | 154 | 157 | 163 | 159 | 161 | 164 | 169 |
| | MBh | 42.6 | 43.2 | 44.4 | 46.3 | 42.2 | 42.8 | 44.1 | 45.9 | 41.2 | 41.8 | 43.0 | 44.9 | 39.3 | 39.9 | 41.1 | 43.0 | 37.1 | 37.6 | 38.9 | 40.8 | 35.0 | 35.6 | 36.8 | 38.7 |
| | S/T | 1.00 | 0.98 | 0.84 | 0.69 | 1.00 | 1.00 | 0.85 | 0.70 | 1.00 | 1.00 | 0.88 | 0.73 | 1.00 | 1.00 | 0.90 | 0.75 | 1.00 | 1.00 | 0.90 | 0.75 | 1.00 | 1.00 | 0.90 | 0.82 |
| | ΔT | 30.91 | 29.05 | 25.57 | 21.96 | 30.86 | 29.00 | 25.52 | 21.91 | 31.12 | 29.26 | 25.78 | 22.17 | 30.84 | 28.98 | 25.50 | 21.89 | 30.59 | 28.73 | 25.25 | 21.64 | 31.76 | 29.90 | 26.42 | 22.81 |
| KW | 2.33 | 2.33 | 2.33 | 2.35 | 2.59 | 2.59 | 2.59 | 2.61 | 2.88 | 2.88 | 2.87 | 2.89 | 3.19 | 3.19 | 3.19 | 3.21 | 3.54 | 3.54 | 3.54 | 3.56 | 3.95 | 3.95 | 3.95 | 3.97 | |
| Amps | 7.83 | 7.82 | 7.80 | 7.89 | 8.95 | 8.95 | 8.93 | 9.01 | 10.21 | 10.20 | 10.18 | 10.27 | 11.57 | 11.56 | 11.54 | 11.63 | 13.09 | 13.08 | 13.06 | 13.15 | 14.88 | 14.87 | 14.85 | 14.93 | |
| Hi-PR | 269 | 270 | 272 | 276 | 310 | 311 | 313 | 318 | 354 | 355 | 357 | 362 | 401 | 402 | 404 | 409 | 452 | 453 | 455 | 459 | 506 | 507 | 509 | 514 | |
| Lo-PR | 129 | 131 | 134 | 139 | 137 | 138 | 142 | 147 | 143 | 145 | 148 | 153 | 149 | 151 | 154 | 159 | 155 | 156 | 159 | 165 | 161 | 163 | 166 | 172 | |
| MBh | 43.2 | 43.8 | 45.0 | 46.9 | 42.8 | 43.4 | 44.6 | 46.5 | 41.8 | 42.3 | 43.6 | 45.5 | 39.9 | 40.5 | 41.7 | 43.6 | 37.7 | 38.2 | 39.5 | 41.3 | 35.6 | 36.2 | 37.4 | 39.3 | |
| S/T | 1.00 | 1.00 | 0.88 | 0.73 | 1.00 | 1.00 | 0.88 | 0.73 | 1.00 | 1.00 | 0.91 | 0.76 | 1.00 | 1.00 | 0.93 | 0.78 | 1.00 | 1.00 | 0.93 | 0.78 | 1.00 | 1.00 | 0.93 | 0.86 | |
| ΔT | 30.04 | 28.18 | 24.70 | 21.09 | 29.99 | 28.13 | 24.65 | 21.04 | 30.25 | 28.39 | 24.91 | 21.30 | 29.97 | 28.11 | 24.63 | 21.02 | 29.72 | 27.86 | 24.38 | 20.77 | 30.89 | 29.03 | 25.54 | 21.94 | |
| KW | 2.34 | 2.34 | 2.34 | 2.36 | 2.60 | 2.60 | 2.60 | 2.62 | 2.89 | 2.89 | 2.88 | 2.90 | 3.20 | 3.20 | 3.20 | 3.22 | 3.55 | 3.55 | 3.55 | 3.57 | 3.96 | 3.96 | 3.96 | 3.98 | |
| Amps | 7.87 | 7.86 | 7.85 | 7.93 | 9.00 | 8.99 | 8.97 | 9.06 | 10.26 | 10.25 | 10.23 | 10.32 | 11.62 | 11.61 | 11.59 | 11.68 | 13.14 | 13.13 | 13.11 | 13.20 | 14.92 | 14.91 | 14.89 | 14.98 | |
| Hi-PR | 271 | 272 | 274 | 278 | 312 | 313 | 315 | 320 | 356 | 357 | 359 | 364 | 403 | 404 | 406 | 411 | 454 | 455 | 457 | 461 | 508 | 509 | 511 | 516 | |
| Lo-PR | 131 | 133 | 136 | 141 | 139 | 140 | 143 | 149 | 145 | 147 | 150 | 155 | 151 | 152 | 156 | 161 | 156 | 158 | 161 | 166 | 163 | 165 | 168 | 173 | |

IDB: Entering Indoor Dry Bulb Temperature
 High and low pressures are measured at the liquid and suction access fittings.
 Shaded area reflects AHRl (TVA) conditions.
 Amps: Unit amps (comp. + evaporator + condenser fan motors)
 kW = Total system power

| IDB | Airflow | Outdoor Ambient Temperature | | | | | | | | | | | | | | | | | | | | | | | |
|-----------|---------|-----------------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|----|
| | | 65 | | | | 75 | | | | 85 | | | | 95 | | | | 105 | | | | 115 | | | |
| | | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 |
| 70 | MBh | 57.1 | 57.9 | 59.6 | - | 56.6 | 57.4 | 59.1 | - | 55.1 | 55.9 | 57.6 | - | 52.6 | 53.4 | 55.1 | - | 49.4 | 50.2 | 51.9 | - | 46.5 | 47.4 | 49.1 | - |
| | S/T | 0.60 | 0.53 | 0.39 | - | 0.61 | 0.53 | 0.39 | - | 0.64 | 0.56 | 0.42 | - | 0.65 | 0.58 | 0.44 | - | 1.00 | 0.60 | 0.46 | - | 1.00 | 0.65 | 0.51 | - |
| | ΔT | 21.07 | 19.14 | 15.54 | - | 21.02 | 19.09 | 15.48 | - | 21.29 | 19.36 | 15.75 | - | 21.00 | 19.07 | 15.46 | - | 20.74 | 18.81 | 15.21 | - | 21.95 | 20.02 | 16.41 | - |
| | KW | 3.68 | 3.67 | 3.67 | - | 4.09 | 4.09 | 4.08 | - | 4.55 | 4.54 | 4.54 | - | 5.05 | 5.04 | 5.04 | - | 5.60 | 5.60 | 5.59 | - | 6.25 | 6.25 | 6.24 | - |
| | Amps | 12.31 | 12.29 | 12.26 | - | 14.10 | 14.08 | 14.05 | - | 16.10 | 16.08 | 16.05 | - | 18.26 | 18.24 | 18.21 | - | 20.68 | 20.66 | 20.63 | - | 23.51 | 23.50 | 23.47 | - |
| | Hi-PR | 276 | 277 | 279 | - | 320 | 321 | 323 | - | 366 | 367 | 369 | - | 415 | 416 | 418 | - | 468 | 469 | 471 | - | 525 | 526 | 528 | - |
| | Lo-PR | 121 | 123 | 126 | - | 129 | 130 | 133 | - | 135 | 137 | 140 | - | 141 | 142 | 145 | - | 146 | 147 | 151 | - | 153 | 154 | 157 | - |
| | MBh | 58.0 | 58.8 | 60.5 | - | 57.5 | 58.3 | 60.0 | - | 56.0 | 56.8 | 58.5 | - | 53.4 | 54.2 | 55.9 | - | 50.3 | 51.1 | 52.8 | - | 47.4 | 48.2 | 49.9 | - |
| | S/T | 0.68 | 0.60 | 0.46 | - | 0.68 | 0.60 | 0.47 | - | 0.71 | 0.63 | 0.49 | - | 0.73 | 0.65 | 0.51 | - | 1.00 | 0.67 | 0.53 | - | 1.00 | 0.72 | 0.59 | - |
| | ΔT | 19.72 | 17.79 | 14.18 | - | 19.67 | 17.73 | 14.13 | - | 19.94 | 18.01 | 14.40 | - | 19.65 | 17.71 | 14.11 | - | 19.39 | 17.46 | 13.85 | - | 20.60 | 18.67 | 15.06 | - |
| KW | 3.70 | 3.70 | 3.69 | - | 4.11 | 4.11 | 4.10 | - | 4.57 | 4.57 | 4.56 | - | 5.07 | 5.07 | 5.06 | - | 5.63 | 5.62 | 5.62 | - | 6.28 | 6.28 | 6.27 | - | |
| Amps | 12.41 | 12.40 | 12.37 | - | 14.20 | 14.19 | 14.16 | - | 16.20 | 16.19 | 16.16 | - | 18.37 | 18.35 | 18.32 | - | 20.78 | 20.77 | 20.74 | - | 23.62 | 23.60 | 23.57 | - | |
| Hi-PR | 279 | 280 | 282 | - | 323 | 324 | 326 | - | 368 | 369 | 371 | - | 418 | 419 | 421 | - | 471 | 472 | 474 | - | 527 | 528 | 530 | - | |
| Lo-PR | 123 | 125 | 128 | - | 131 | 132 | 135 | - | 137 | 139 | 142 | - | 143 | 144 | 147 | - | 148 | 149 | 153 | - | 155 | 156 | 159 | - | |
| MBh | 58.8 | 59.6 | 61.3 | - | 58.3 | 59.1 | 60.8 | - | 56.8 | 57.6 | 59.3 | - | 54.2 | 55.0 | 56.7 | - | 51.1 | 51.9 | 53.6 | - | 48.2 | 49.0 | 50.7 | - | |
| S/T | 0.71 | 0.63 | 0.49 | - | 0.71 | 0.64 | 0.50 | - | 0.74 | 0.66 | 0.52 | - | 1.00 | 0.68 | 0.54 | - | 1.00 | 0.70 | 0.57 | - | 1.00 | 0.76 | 0.62 | - | |
| ΔT | 18.82 | 16.88 | 13.28 | - | 18.76 | 16.83 | 13.22 | - | 19.03 | 17.10 | 13.50 | - | 18.74 | 16.81 | 13.21 | - | 18.49 | 16.55 | 12.95 | - | 19.69 | 17.76 | 14.16 | - | |
| KW | 3.72 | 3.71 | 3.71 | - | 4.13 | 4.13 | 4.12 | - | 4.59 | 4.59 | 4.58 | - | 5.09 | 5.08 | 5.08 | - | 5.64 | 5.64 | 5.63 | - | 6.29 | 6.29 | 6.28 | - | |
| Amps | 12.49 | 12.47 | 12.44 | - | 14.28 | 14.26 | 14.23 | - | 16.28 | 16.26 | 16.23 | - | 18.44 | 18.42 | 18.39 | - | 20.85 | 20.84 | 20.81 | - | 23.69 | 23.68 | 23.65 | - | |
| Hi-PR | 281 | 282 | 284 | - | 325 | 326 | 328 | - | 370 | 372 | 373 | - | 420 | 421 | 423 | - | 473 | 474 | 476 | - | 529 | 531 | 532 | - | |
| Lo-PR | 125 | 127 | 130 | - | 132 | 134 | 137 | - | 139 | 140 | 144 | - | 144 | 146 | 149 | - | 150 | 151 | 154 | - | 157 | 158 | 161 | - | |

| | | | | | | | | | | | | | | | | | | | | | | | | | |
|-----------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|--------------|--------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| 75 | MBh | 57.2 | 58.0 | 59.7 | 62.3 | 56.7 | 57.5 | 59.2 | 61.8 | 55.2 | 56.0 | 57.7 | 60.3 | 52.6 | 53.4 | 55.1 | 57.7 | 49.4 | 50.3 | 52.0 | 54.6 | 46.6 | 47.4 | 49.1 | 51.7 |
| | S/T | 0.73 | 0.66 | 0.52 | 0.37 | 0.74 | 0.66 | 0.53 | 0.38 | 1.00 | 0.69 | 0.55 | 0.41 | 1.00 | 0.71 | 0.57 | 0.43 | 1.00 | 0.73 | 0.59 | 0.45 | 1.00 | 0.78 | 0.65 | 0.50 |
| | ΔT | 25.32 | 23.39 | 19.78 | 16.05 | 25.27 | 23.34 | 19.73 | 15.99 | 25.54 | 23.61 | 20.00 | 16.26 | 25.25 | 23.32 | 19.71 | 15.97 | 24.99 | 23.06 | 19.45 | 15.72 | 26.20 | 24.27 | 20.66 | 16.92 |
| | KW | 3.67 | 3.67 | 3.66 | 3.69 | 4.09 | 4.08 | 4.08 | 4.11 | 4.55 | 4.54 | 4.54 | 4.57 | 5.04 | 5.04 | 5.03 | 5.06 | 5.60 | 5.60 | 5.59 | 5.62 | 6.25 | 6.25 | 6.24 | 6.27 |
| | Amps | 12.29 | 12.28 | 12.25 | 12.39 | 14.09 | 14.07 | 14.04 | 14.18 | 16.08 | 16.07 | 16.04 | 16.18 | 18.25 | 18.23 | 18.20 | 18.34 | 20.66 | 20.65 | 20.62 | 20.76 | 23.50 | 23.48 | 23.45 | 23.59 |
| | Hi-PR | 276 | 278 | 280 | 284 | 320 | 321 | 323 | 328 | 366 | 367 | 369 | 374 | 415 | 416 | 418 | 423 | 468 | 469 | 471 | 476 | 525 | 526 | 528 | 533 |
| | Lo-PR | 121 | 123 | 126 | 131 | 129 | 130 | 133 | 138 | 135 | 137 | 140 | 145 | 141 | 142 | 145 | 150 | 146 | 147 | 151 | 156 | 153 | 154 | 157 | 162 |
| | MBh | 58.0 | 58.8 | 60.5 | 63.1 | 57.5 | 58.3 | 60.0 | 62.6 | 56.0 | 56.8 | 58.5 | 61.1 | 53.4 | 54.2 | 56.0 | 58.6 | 50.3 | 51.1 | 52.8 | 55.4 | 47.4 | 48.2 | 49.9 | 52.6 |
| | S/T | 0.81 | 0.73 | 0.59 | 0.45 | 0.81 | 0.74 | 0.60 | 0.45 | 1.00 | 0.76 | 0.62 | 0.48 | 1.00 | 0.78 | 0.64 | 0.50 | 1.00 | 0.80 | 0.67 | 0.52 | 1.00 | 1.00 | 0.72 | 0.57 |
| | ΔT | 23.97 | 22.03 | 18.43 | 14.69 | 23.91 | 21.98 | 18.38 | 14.64 | 24.18 | 22.25 | 18.65 | 14.91 | 23.89 | 21.96 | 18.36 | 14.62 | 23.64 | 21.70 | 18.10 | 14.36 | 24.84 | 22.91 | 19.31 | 15.57 |
| KW | 3.70 | 3.70 | 3.69 | 3.72 | 4.11 | 4.11 | 4.10 | 4.13 | 4.57 | 4.57 | 4.56 | 4.59 | 5.07 | 5.06 | 5.06 | 5.09 | 5.62 | 5.62 | 5.61 | 5.64 | 6.28 | 6.27 | 6.27 | 6.30 | |
| Amps | 12.40 | 12.39 | 12.36 | 12.49 | 14.19 | 14.18 | 14.15 | 14.29 | 16.19 | 16.18 | 16.15 | 16.28 | 18.35 | 18.34 | 18.31 | 18.45 | 20.77 | 20.76 | 20.73 | 20.86 | 23.61 | 23.59 | 23.56 | 23.70 | |
| Hi-PR | 279 | 280 | 282 | 287 | 323 | 324 | 326 | 331 | 369 | 370 | 372 | 376 | 418 | 419 | 421 | 426 | 471 | 472 | 474 | 479 | 527 | 529 | 531 | 535 | |
| Lo-PR | 123 | 125 | 128 | 133 | 131 | 132 | 135 | 140 | 137 | 139 | 142 | 147 | 143 | 144 | 147 | 152 | 148 | 150 | 153 | 158 | 155 | 156 | 159 | 165 | |
| MBh | 58.8 | 59.6 | 61.3 | 64.0 | 58.3 | 59.1 | 60.8 | 63.4 | 56.8 | 57.6 | 59.3 | 62.0 | 54.3 | 55.1 | 56.8 | 59.4 | 51.1 | 51.9 | 53.6 | 56.2 | 48.2 | 49.1 | 50.8 | 53.4 | |
| S/T | 0.84 | 0.76 | 0.62 | 0.48 | 0.84 | 0.77 | 0.63 | 0.49 | 1.00 | 0.79 | 0.66 | 0.51 | 1.00 | 0.81 | 0.68 | 0.53 | 1.00 | 0.84 | 0.70 | 0.55 | 1.00 | 1.00 | 0.75 | 0.61 | |
| ΔT | 23.06 | 21.13 | 17.52 | 13.79 | 23.01 | 21.08 | 17.47 | 13.74 | 23.28 | 21.35 | 17.74 | 14.01 | 22.99 | 21.06 | 17.45 | 13.72 | 22.73 | 20.80 | 17.19 | 13.46 | 23.94 | 22.01 | 18.40 | 14.67 | |
| KW | 3.72 | 3.71 | 3.70 | 3.74 | 4.13 | 4.12 | 4.12 | 4.15 | 4.59 | 4.58 | 4.58 | 4.61 | 5.08 | 5.08 | 5.07 | 5.11 | 5.64 | 5.64 | 5.63 | 5.66 | 6.29 | 6.29 | 6.28 | 6.31 | |
| Amps | 12.47 | 12.46 | 12.43 | 12.57 | 14.26 | 14.25 | 14.22 | 14.36 | 16.26 | 16.25 | 16.22 | 16.36 | 18.43 | 18.41 | 18.38 | 18.52 | 20.84 | 20.83 | 20.80 | 20.94 | 23.68 | 23.66 | 23.63 | 23.77 | |
| Hi-PR | 281 | 282 | 284 | 289 | 325 | 326 | 328 | 333 | 371 | 372 | 374 | 379 | 420 | 421 | 423 | 428 | 473 | 474 | 476 | 481 | 530 | 531 | 533 | 538 | |
| Lo-PR | 125 | 127 | 130 | 135 | 132 | 134 | 137 | 142 | 139 | 140 | 144 | 149 | 144 | 146 | 149 | 154 | 150 | 151 | 154 | 160 | 157 | 158 | 161 | 166 | |

IDB: Entering Indoor Dry Bulb Temperature
 High and low pressures are measured at the liquid and suction access fittings.
 Shaded area reflects ACCA (TVA) conditions.
 Amps: Unit amps (comp. + evaporator + condenser fan motors)
 kW = Total system power

| IDB | Airflow | Outdoor Ambient Temperature | | | | | | | | | | | | | | | | | | | | | | | | |
|-------------|-------------|-----------------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|--------------|--------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|------|
| | | 65 | | | | 75 | | | | 85 | | | | 95 | | | | 105 | | | | 115 | | | | |
| | | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | |
| 80 | MBh | 57.5 | 58.3 | 60.0 | 62.6 | 56.9 | 57.8 | 59.5 | 62.1 | 55.5 | 56.3 | 58.0 | 60.6 | 52.9 | 53.7 | 55.4 | 58.0 | 49.7 | 50.5 | 52.3 | 54.9 | 46.9 | 47.7 | 49.4 | 52.0 | |
| | S/T | 0.86 | 0.78 | 0.65 | 0.50 | 1.00 | 0.79 | 0.65 | 0.51 | 1.00 | 0.82 | 0.68 | 0.53 | 1.00 | 0.84 | 0.70 | 0.55 | 1.00 | 1.00 | 0.72 | 0.58 | 1.00 | 1.00 | 0.77 | 0.63 | |
| | ΔT | 29.60 | 27.67 | 24.06 | 20.32 | 29.54 | 27.61 | 24.01 | 20.27 | 29.82 | 27.88 | 24.28 | 20.54 | 29.52 | 27.59 | 23.99 | 20.25 | 29.27 | 27.33 | 23.73 | 19.99 | 30.48 | 28.54 | 24.94 | 21.20 | |
| | 1500 | KW | 3.68 | 3.67 | 3.67 | 3.70 | 4.09 | 4.08 | 4.08 | 4.11 | 4.55 | 4.54 | 4.54 | 4.57 | 5.04 | 5.04 | 5.03 | 5.07 | 5.60 | 5.60 | 5.59 | 5.62 | 6.25 | 6.25 | 6.24 | 6.27 |
| | Amps | 12.30 | 12.29 | 12.26 | 12.40 | 14.09 | 14.08 | 14.05 | 14.19 | 16.09 | 16.08 | 16.05 | 16.19 | 18.26 | 18.24 | 18.21 | 18.35 | 20.67 | 20.66 | 20.63 | 20.77 | 23.51 | 23.49 | 23.46 | 23.60 | |
| | Hi-PR | 277 | 278 | 280 | 285 | 321 | 322 | 324 | 329 | 366 | 368 | 369 | 374 | 416 | 417 | 419 | 424 | 469 | 470 | 472 | 477 | 525 | 526 | 528 | 533 | |
| | Lo-PR | 122 | 123 | 126 | 132 | 129 | 131 | 134 | 139 | 136 | 137 | 140 | 145 | 141 | 143 | 146 | 151 | 147 | 148 | 151 | 156 | 153 | 155 | 158 | 163 | |
| | MBh | 58.3 | 59.1 | 60.8 | 63.4 | 57.8 | 58.6 | 60.3 | 62.9 | 56.3 | 57.1 | 58.8 | 61.4 | 53.7 | 54.5 | 56.2 | 58.9 | 50.6 | 51.4 | 53.1 | 55.7 | 47.7 | 48.5 | 50.2 | 52.9 | |
| | S/T | 1.00 | 0.86 | 0.72 | 0.57 | 1.00 | 0.86 | 0.73 | 0.58 | 1.00 | 0.89 | 0.75 | 0.61 | 1.00 | 0.91 | 0.77 | 0.63 | 1.00 | 1.00 | 0.79 | 0.65 | 1.00 | 1.00 | 0.84 | 0.70 | |
| | ΔT | 28.24 | 26.31 | 22.70 | 18.97 | 28.19 | 26.26 | 22.65 | 18.91 | 28.46 | 26.53 | 22.92 | 19.19 | 28.17 | 26.24 | 22.63 | 18.89 | 27.91 | 25.98 | 22.37 | 18.64 | 29.12 | 27.19 | 23.58 | 19.85 | |
| 1750 | KW | 3.70 | 3.70 | 3.69 | 3.72 | 4.11 | 4.11 | 4.10 | 4.13 | 4.57 | 4.57 | 4.56 | 4.59 | 5.07 | 5.07 | 5.06 | 5.09 | 5.63 | 5.62 | 5.62 | 5.65 | 6.28 | 6.27 | 6.27 | 6.30 | |
| Amps | 12.41 | 12.40 | 12.37 | 12.50 | 14.20 | 14.19 | 14.16 | 14.29 | 16.20 | 16.19 | 16.16 | 16.29 | 18.36 | 18.35 | 18.32 | 18.46 | 20.78 | 20.77 | 20.74 | 20.87 | 23.62 | 23.60 | 23.57 | 23.71 | | |
| Hi-PR | 280 | 281 | 283 | 288 | 323 | 325 | 326 | 331 | 369 | 370 | 372 | 377 | 418 | 419 | 421 | 426 | 471 | 473 | 474 | 479 | 528 | 529 | 531 | 536 | | |
| Lo-PR | 124 | 125 | 128 | 134 | 131 | 133 | 136 | 141 | 138 | 139 | 142 | 147 | 143 | 145 | 148 | 153 | 149 | 150 | 153 | 158 | 155 | 157 | 160 | 165 | | |
| MBh | 59.1 | 59.9 | 61.6 | 64.3 | 58.6 | 59.4 | 61.1 | 63.7 | 57.1 | 57.9 | 59.6 | 62.3 | 54.6 | 55.4 | 57.1 | 59.7 | 51.4 | 52.2 | 53.9 | 56.5 | 48.5 | 49.3 | 51.1 | 53.7 | | |
| S/T | 1.00 | 0.89 | 0.75 | 0.61 | 1.00 | 0.89 | 0.76 | 0.61 | 1.00 | 0.92 | 0.78 | 0.64 | 1.00 | 1.00 | 0.80 | 0.66 | 1.00 | 1.00 | 0.83 | 0.68 | 1.00 | 1.00 | 0.88 | 0.73 | | |
| ΔT | 27.34 | 25.41 | 21.80 | 18.06 | 27.29 | 25.35 | 21.75 | 18.01 | 27.56 | 25.63 | 22.02 | 18.28 | 27.27 | 25.33 | 21.73 | 17.99 | 27.01 | 25.08 | 21.47 | 17.73 | 28.22 | 26.29 | 22.68 | 18.94 | | |
| 1950 | KW | 3.72 | 3.71 | 3.71 | 3.74 | 4.13 | 4.13 | 4.12 | 4.15 | 4.59 | 4.59 | 4.58 | 4.61 | 5.09 | 5.08 | 5.08 | 5.11 | 5.64 | 5.64 | 5.63 | 5.66 | 6.29 | 6.29 | 6.28 | 6.32 | |
| Amps | 12.48 | 12.47 | 12.44 | 12.58 | 14.27 | 14.26 | 14.23 | 14.37 | 16.27 | 16.26 | 16.23 | 16.37 | 18.44 | 18.42 | 18.39 | 18.53 | 20.85 | 20.84 | 20.81 | 20.94 | 23.69 | 23.67 | 23.64 | 23.78 | | |
| Hi-PR | 282 | 283 | 285 | 290 | 325 | 327 | 329 | 333 | 371 | 372 | 374 | 379 | 420 | 422 | 423 | 428 | 473 | 475 | 477 | 481 | 530 | 531 | 533 | 538 | | |
| Lo-PR | 126 | 127 | 130 | 135 | 133 | 135 | 138 | 143 | 140 | 141 | 144 | 149 | 145 | 146 | 150 | 155 | 150 | 152 | 155 | 160 | 157 | 159 | 162 | 167 | | |

| | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------------|-------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|------|
| 85 | MBh | 58.4 | 59.2 | 60.9 | 63.6 | 57.9 | 58.7 | 60.4 | 63.0 | 56.4 | 57.2 | 58.9 | 61.5 | 53.8 | 54.7 | 56.4 | 59.0 | 50.7 | 51.5 | 53.2 | 55.8 | 47.8 | 48.6 | 50.4 | 53.0 | |
| | S/T | 1.00 | 0.89 | 0.75 | 0.60 | 1.00 | 0.89 | 0.76 | 0.61 | 1.00 | 1.00 | 0.78 | 0.64 | 1.00 | 1.00 | 0.80 | 0.66 | 1.00 | 1.00 | 0.82 | 0.68 | 1.00 | 1.00 | 1.00 | 0.73 | |
| | ΔT | 33.39 | 31.46 | 27.85 | 24.11 | 33.34 | 31.40 | 27.80 | 24.06 | 33.61 | 31.68 | 28.07 | 24.33 | 33.32 | 31.38 | 27.78 | 24.04 | 33.06 | 31.13 | 27.52 | 23.78 | 34.27 | 32.34 | 28.73 | 24.99 | |
| | 1500 | KW | 3.68 | 3.68 | 3.67 | 3.71 | 4.10 | 4.09 | 4.09 | 4.12 | 4.56 | 4.55 | 4.55 | 4.58 | 5.05 | 5.05 | 5.04 | 5.07 | 5.61 | 5.61 | 5.60 | 5.63 | 6.26 | 6.26 | 6.25 | 6.28 |
| | Amps | 12.34 | 12.32 | 12.29 | 12.43 | 14.13 | 14.11 | 14.08 | 14.22 | 16.13 | 16.11 | 16.08 | 16.22 | 18.29 | 18.28 | 18.25 | 18.38 | 20.71 | 20.69 | 20.66 | 20.80 | 23.54 | 23.53 | 23.50 | 23.63 | |
| | Hi-PR | 278 | 279 | 281 | 286 | 322 | 323 | 325 | 330 | 368 | 369 | 371 | 376 | 417 | 418 | 420 | 425 | 470 | 471 | 473 | 478 | 527 | 528 | 530 | 535 | |
| | Lo-PR | 124 | 125 | 128 | 133 | 131 | 133 | 136 | 141 | 137 | 139 | 142 | 147 | 143 | 144 | 148 | 153 | 148 | 150 | 153 | 158 | 155 | 157 | 160 | 165 | |
| | MBh | 59.3 | 60.1 | 61.8 | 64.4 | 58.8 | 59.6 | 61.3 | 63.9 | 57.3 | 58.1 | 59.8 | 62.4 | 54.7 | 55.5 | 57.2 | 59.8 | 51.6 | 52.4 | 54.1 | 56.7 | 48.7 | 49.5 | 51.2 | 53.8 | |
| | S/T | 1.00 | 0.96 | 0.82 | 0.68 | 1.00 | 0.97 | 0.83 | 0.68 | 1.00 | 1.00 | 0.85 | 0.71 | 1.00 | 1.00 | 0.87 | 0.73 | 1.00 | 1.00 | 0.90 | 0.75 | 1.00 | 1.00 | 1.00 | 0.80 | |
| | ΔT | 32.03 | 30.10 | 26.50 | 22.76 | 31.98 | 30.05 | 26.44 | 22.71 | 32.25 | 30.32 | 26.71 | 22.98 | 31.96 | 30.03 | 26.42 | 22.69 | 31.70 | 29.77 | 26.17 | 22.43 | 32.91 | 30.98 | 27.37 | 23.64 | |
| 1750 | KW | 3.71 | 3.71 | 3.70 | 3.73 | 4.12 | 4.12 | 4.11 | 4.14 | 4.58 | 4.58 | 4.57 | 4.60 | 5.08 | 5.07 | 5.07 | 5.10 | 5.63 | 5.63 | 5.62 | 5.65 | 6.29 | 6.28 | 6.28 | 6.31 | |
| Amps | 12.45 | 12.43 | 12.40 | 12.54 | 14.24 | 14.22 | 14.19 | 14.33 | 16.24 | 16.22 | 16.19 | 16.33 | 18.40 | 18.38 | 18.35 | 18.49 | 20.82 | 20.80 | 20.77 | 20.91 | 23.65 | 23.64 | 23.61 | 23.74 | | |
| Hi-PR | 281 | 282 | 284 | 289 | 325 | 326 | 328 | 333 | 370 | 372 | 373 | 378 | 420 | 421 | 423 | 428 | 473 | 474 | 476 | 481 | 529 | 530 | 532 | 537 | | |
| Lo-PR | 126 | 127 | 130 | 135 | 133 | 135 | 138 | 143 | 140 | 141 | 144 | 149 | 145 | 147 | 150 | 155 | 150 | 152 | 155 | 160 | 157 | 159 | 162 | 167 | | |
| MBh | 60.1 | 60.9 | 62.6 | 65.2 | 59.6 | 60.4 | 62.1 | 64.7 | 58.1 | 58.9 | 60.6 | 63.2 | 55.5 | 56.3 | 58.0 | 60.6 | 52.4 | 53.2 | 54.9 | 57.5 | 49.5 | 50.3 | 52.0 | 54.6 | | |
| S/T | 1.00 | 0.99 | 0.85 | 0.71 | 1.00 | 1.00 | 0.86 | 0.72 | 1.00 | 1.00 | 0.89 | 0.74 | 1.00 | 1.00 | 0.91 | 0.76 | 1.00 | 1.00 | 0.93 | 0.78 | 1.00 | 1.00 | 1.00 | 0.83 | | |
| ΔT | 31.13 | 29.20 | 25.59 | 21.86 | 31.08 | 29.15 | 25.54 | 21.80 | 31.35 | 29.42 | 25.81 | 22.07 | 31.06 | 29.13 | 25.52 | 21.78 | 30.80 | 28.87 | 25.26 | 21.53 | 32.01 | 30.08 | 26.47 | 22.73 | | |
| 1950 | KW | 3.73 | 3.72 | 3.71 | 3.75 | 4.14 | 4.13 | 4.13 | 4.16 | 4.60 | 4.59 | 4.59 | 4.62 | 5.09 | 5.09 | 5.08 | 5.12 | 5.65 | 5.65 | 5.64 | 5.67 | 6.30 | 6.30 | 6.29 | 6.32 | |
| Amps | 12.52 | 12.50 | 12.47 | 12.61 | 14.31 | 14.29 | 14.26 | 14.40 | 16.31 | 16.29 | 16.26 | 16.40 | 18.47 | 18.46 | 18.43 | 18.56 | 20.89 | 20.87 | 20.84 | 20.98 | 23.72 | 23.71 | 23.68 | 23.81 | | |
| Hi-PR | 283 | 284 | 286 | 291 | 327 | 328 | 330 | 335 | 372 | 374 | 376 | 380 | 422 | 423 | 425 | 430 | 475 | 476 | 478 | 483 | 531 | 533 | 535 | 539 | | |
| Lo-PR | 127 | 129 | 132 | 137 | 135 | 136 | 139 | 145 | 141 | 143 | 146 | 151 | 147 | 148 | 151 | 157 | 152 | 154 | 157 | 162 | 159 | 160 | 163 | 169 | | |

IDB: Entering Indoor Dry Bulb Temperature
 High and low pressures are measured at the liquid and suction access fittings.
 Shaded area reflects AHR1 (TVA) conditions.
 Amps: Unit amps (comp. + evaporator + condenser fan motors)
 kW = Total system power

DP3UM2404041 - RISE RANGE: 20° - 50°

| E.S.P. | T1 FAN ONLY SPEED | | T2 HEATING SPEED | | | T3 HEATING SPEED | | | T4 COOLING SPEED | | T5 COOLING SPEED | |
|--------|-------------------|-------|------------------|-------|------|------------------|-------|------|------------------|-------|------------------|-------|
| | CFM | WATTS | CFM | WATTS | RISE | CFM | WATTS | RISE | CFM | WATTS | CFM | WATTS |
| 0.1 | 700 | 76 | 1080 | 197 | 42 | 733 | 65 | 34 | 1020 | 153 | 1119 | 208 |
| 0.2 | 665 | 84 | 1032 | 204 | 44 | 703 | 74 | 36 | 985 | 160 | 1110 | 216 |
| 0.3 | 614 | 91 | 988 | 212 | 46 | 664 | 83 | 38 | 946 | 168 | 1083 | 222 |
| 0.4 | 561 | 98 | 948 | 220 | 47 | 604 | 91 | 41 | 905 | 175 | 1052 | 229 |
| 0.5 | 505 | 105 | 902 | 225 | 50 | 536 | 98 | 44 | 863 | 183 | 1017 | 237 |
| 0.6 | 438 | 114 | 859 | 231 | 52 | 483 | 105 | 49 | 813 | 190 | 979 | 243 |
| 0.7 | 374 | 119 | 813 | 238 | 55 | 430 | 111 | x | 759 | 199 | 934 | 250 |
| 0.8 | 318 | 125 | 770 | 245 | 58 | 381 | 119 | x | 701 | 206 | 879 | 259 |

DP3UM3006041 - RISE RANGE: 30° - 60°

| E.S.P. | T1 FAN ONLY SPEED | | T2 HEATING SPEED | | | T3 HEATING SPEED | | | T4 COOLING SPEED | | T5 COOLING SPEED | |
|--------|-------------------|-------|------------------|-------|------|------------------|-------|------|------------------|-------|------------------|-------|
| | CFM | WATTS | CFM | WATTS | RISE | CFM | WATTS | RISE | CFM | WATTS | CFM | WATTS |
| 0.1 | 891 | 113 | 1196 | 190 | 34 | 891 | 113 | 44 | 1202 | 246 | 1285 | 278 |
| 0.2 | 831 | 119 | 1147 | 197 | 36 | 831 | 119 | 46 | 1173 | 251 | 1238 | 284 |
| 0.3 | 780 | 127 | 1102 | 204 | 37 | 780 | 127 | 47 | 1143 | 258 | 1189 | 293 |
| 0.4 | 714 | 135 | 1054 | 212 | 38 | 714 | 135 | 50 | 1110 | 265 | 1146 | 300 |
| 0.5 | 639 | 146 | 1009 | 221 | 39 | 639 | 146 | 54 | 1073 | 272 | 1105 | 306 |
| 0.6 | 555 | 153 | 955 | 230 | 40 | 555 | 153 | 60 | 1035 | 278 | 1058 | 314 |
| 0.7 | 502 | 159 | 897 | 238 | 41 | 502 | 159 | X | 994 | 285 | 1011 | 324 |
| 0.8 | 444 | 165 | 828 | 245 | 42 | 444 | 165 | X | 947 | 293 | 948 | 329 |

DP3UM3606041 - RISE RANGE: 30° - 60°

| E.S.P. | T1 FAN ONLY SPEED | | T2 HEATING SPEED | | | T3 HEATING SPEED | | | T4 COOLING SPEED | | T5 COOLING SPEED | |
|--------|-------------------|-------|------------------|-------|------|------------------|-------|------|------------------|-------|------------------|-------|
| | CFM | WATTS | CFM | WATTS | RISE | CFM | WATTS | RISE | CFM | WATTS | CFM | WATTS |
| 0.1 | 870 | 107 | 1216 | 228 | 31 | 870 | 107 | 42 | 1448 | 342 | 1533 | 408 |
| 0.2 | 792 | 118 | 1149 | 234 | 32 | 792 | 118 | 44 | 1403 | 343 | 1470 | 419 |
| 0.3 | 685 | 130 | 1083 | 246 | 33 | 685 | 130 | 48 | 1358 | 354 | 1416 | 428 |
| 0.4 | 623 | 138 | 1014 | 252 | 34 | 623 | 138 | 51 | 1319 | 361 | 1360 | 434 |
| 0.5 | 549 | 143 | 919 | 265 | 38 | 549 | 143 | 54 | 1277 | 366 | 1307 | 446 |
| 0.6 | 479 | 144 | 850 | 272 | 41 | 479 | 144 | 55 | 1232 | 376 | 1247 | 455 |
| 0.7 | 411 | 155 | 781 | 280 | 43 | 411 | 155 | 58 | 1176 | 386 | 1177 | 468 |
| 0.8 | 343 | 161 | 717 | 285 | 44 | 343 | 161 | X | 1120 | 395 | 1104 | 478 |

X = Not recommend for heat application

NOTE: The shaded area indicates ranges in excess of maximum external static pressure allowable when heating. For satisfactory operation, external static pressure should not exceed 0.8" w.c.

DP3UM4208041 - RISE RANGE: 30° - 60°

| E.S.P. | T1 FAN ONLY SPEED | | T2 HEATING SPEED | | | T3 HEATING SPEED | | | T4 COOLING SPEED | | T5 COOLING SPEED | |
|--------|-------------------|-------|------------------|-------|------|------------------|-------|------|------------------|-------|------------------|-------|
| | CFM | WATTS | CFM | WATTS | RISE | CFM | WATTS | RISE | CFM | WATTS | CFM | WATTS |
| 0.1 | 1090 | 146 | 1363 | 249 | 40 | 1304 | 221 | 43 | 1542 | 392 | 1637 | 444 |
| 0.2 | 1024 | 156 | 1305 | 256 | 42 | 1242 | 230 | 45 | 1494 | 403 | 1593 | 454 |
| 0.3 | 960 | 165 | 1247 | 269 | 45 | 1185 | 241 | 46 | 1437 | 409 | 1541 | 459 |
| 0.4 | 867 | 173 | 1189 | 276 | 46 | 1126 | 249 | 49 | 1392 | 419 | 1497 | 473 |
| 0.5 | 791 | 183 | 1130 | 285 | 48 | 1054 | 258 | 52 | 1342 | 430 | 1450 | 478 |
| 0.6 | 710 | 191 | 1048 | 294 | 50 | 967 | 270 | 54 | 1295 | 440 | 1407 | 485 |
| 0.7 | 644 | 196 | 966 | 305 | 52 | 899 | 278 | 56 | 1238 | 447 | 1357 | 493 |
| 0.8 | 587 | 206 | 901 | 315 | 54 | 832 | 285 | 59 | 1183 | 454 | 1304 | 502 |

DP3UM4808041 - RISE RANGE: 30° - 60°


| E.S.P. | T1 FAN ONLY SPEED | | T2 HEATING SPEED | | | T3 HEATING SPEED | | | T4 COOLING SPEED | | T5 COOLING SPEED | |
|--------|-------------------|-------|------------------|-------|------|------------------|-------|------|------------------|-------|------------------|-------|
| | CFM | WATTS | CFM | WATTS | RISE | CFM | WATTS | RISE | CFM | WATTS | CFM | WATTS |
| 0.1 | 1090 | 146 | 1363 | 249 | 40 | 1304 | 221 | 43 | 1851 | 679 | 1928 | 626 |
| 0.2 | 1024 | 156 | 1305 | 256 | 42 | 1242 | 230 | 45 | 1803 | 688 | 1874 | 639 |
| 0.3 | 960 | 165 | 1247 | 269 | 45 | 1185 | 241 | 46 | 1754 | 696 | 1836 | 647 |
| 0.4 | 867 | 173 | 1189 | 276 | 46 | 1126 | 249 | 49 | 1706 | 702 | 1780 | 658 |
| 0.5 | 791 | 183 | 1130 | 285 | 48 | 1054 | 258 | 52 | 1665 | 710 | 1735 | 671 |
| 0.6 | 710 | 191 | 1048 | 294 | 50 | 967 | 270 | 54 | 1619 | 719 | 1683 | 677 |
| 0.7 | 644 | 196 | 966 | 305 | 52 | 899 | 278 | 56 | 1573 | 727 | 1629 | 686 |
| 0.8 | 587 | 206 | 901 | 315 | 54 | 832 | 285 | 59 | 1528 | 739 | 1578 | 693 |


DP3UM6108041 - RISE RANGE: 30° - 60°

| E.S.P. | T1 FAN ONLY SPEED | | T2 HEATING SPEED | | | T3 LOW STAGE COOLING SPEED | | T4 HIGH STAGE COOLING SPEED | | T5 COOLING SPEED | |
|--------|-------------------|-------|------------------|-------|------|----------------------------|-------|-----------------------------|-------|------------------|-------|
| | CFM | WATTS | CFM | WATTS | RISE | CFM | WATTS | CFM | WATTS | CFM | WATTS |
| 0.1 | 1156 | 158 | 1283 | 200 | 42 | 1420 | 284 | 2044 | 757 | 2107 | 602 |
| 0.2 | 1077 | 163 | 1224 | 210 | 44 | 1371 | 294 | 1996 | 770 | 2060 | 616 |
| 0.3 | 1015 | 172 | 1152 | 216 | 46 | 1318 | 302 | 1955 | 779 | 2015 | 622 |
| 0.4 | 930 | 179 | 1098 | 228 | 49 | 1268 | 313 | 1913 | 785 | 1972 | 644 |
| 0.5 | 839 | 193 | 1025 | 236 | 51 | 1217 | 326 | 1871 | 796 | 1930 | 649 |
| 0.6 | 759 | 200 | 945 | 249 | 53 | 1163 | 341 | 1828 | 803 | 1888 | 660 |
| 0.7 | 697 | 206 | 867 | 264 | 56 | 1101 | 347 | 1788 | 809 | 1850 | 664 |
| 0.8 | 632 | 216 | 806 | 271 | 61 | 1041 | 358 | 1742 | 822 | 1805 | 676 |


X = Not recommend for heat application

NOTE: The shaded area indicates ranges in excess of maximum external static pressure allowable when heating. For satisfactory operation, external static pressure should not exceed 0.8" w.c.

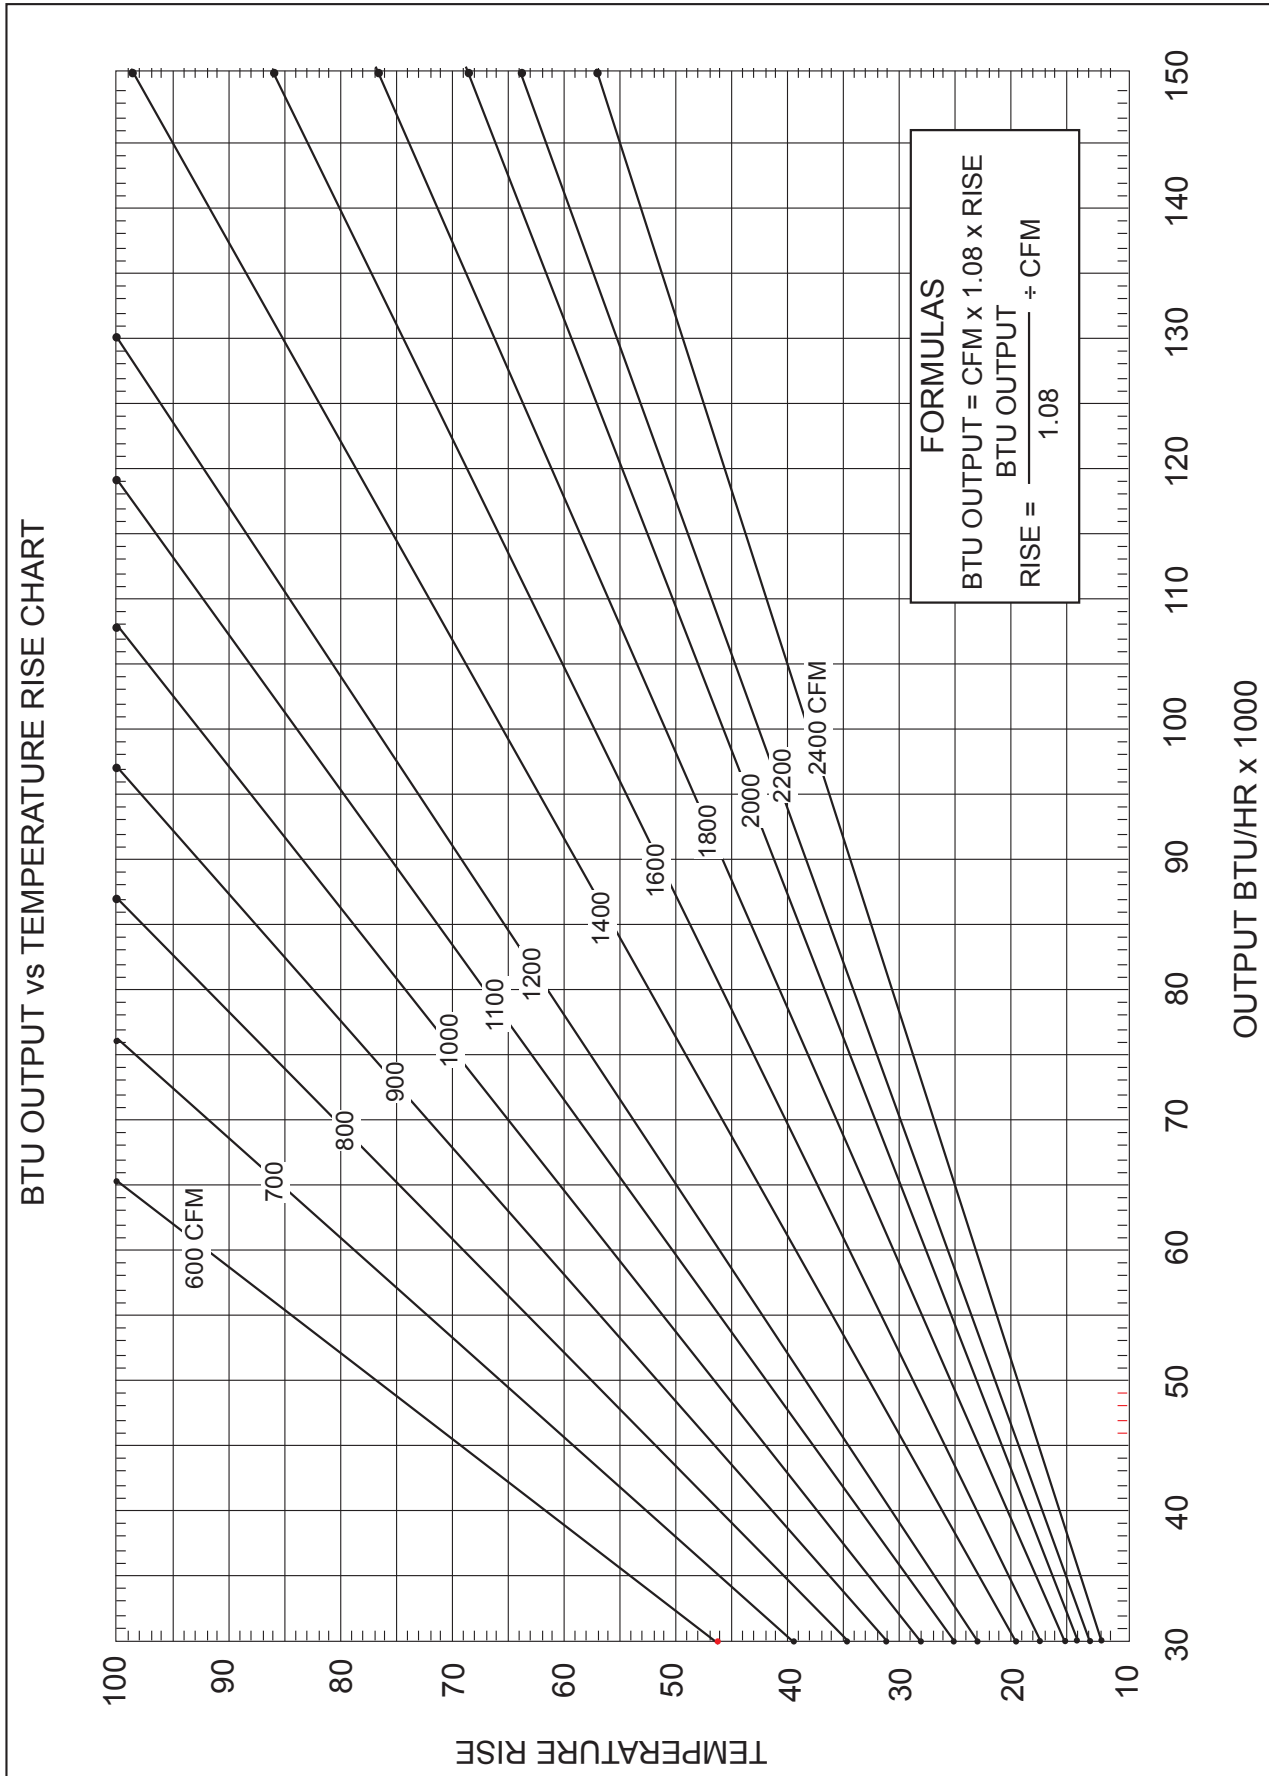


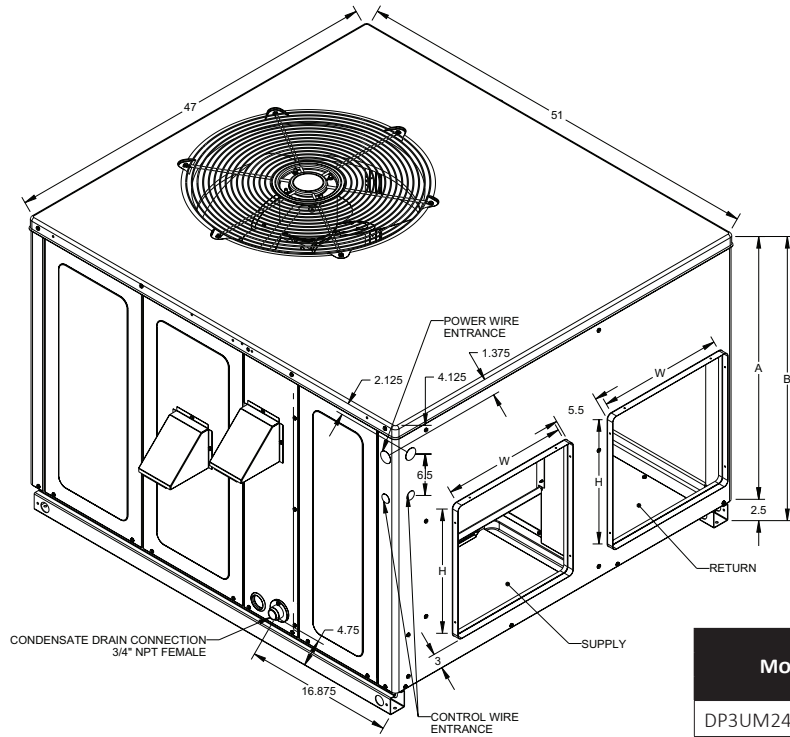

| MODEL | UNIT DIMENSIONS (INCHES) | | | | CHASSIS SIZE |
|--------------|--------------------------|----|--------|-----|--------------|
| | W | D | HEIGHT | | |
| DP3UM2404041 | 47 | 51 | 32 | 34½ | Medium |
| DP3UM3006041 | 47 | 51 | 32 | 34½ | Medium |
| DP3UM3606041 | 47 | 51 | 32 | 34½ | Medium |
| DP3UM4208041 | 47 | 51 | 40 | 42½ | Large |
| DP3UM4808041 | 47 | 51 | 40 | 42½ | Large |
| DP3UM6108041 | 47 | 51 | 40 | 42½ | Large |

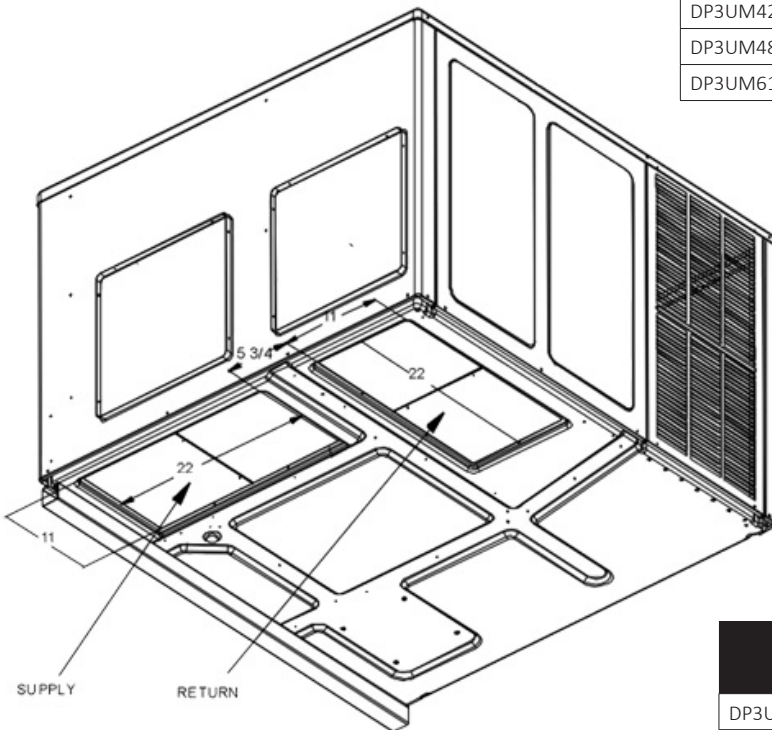


| MODEL | DUCT OPENINGS | | | |
|--------------|---------------|----|--------|----|
| | SUPPLY | | RETURN | |
| | W | H | W | H |
| DP3UM2404041 | 16 | 16 | 16 | 16 |
| DP3UM3006041 | 16 | 16 | 16 | 16 |
| DP3UM3606041 | 16 | 16 | 16 | 16 |
| DP3UM4208041 | 16 | 18 | 16 | 18 |
| DP3UM4808041 | 16 | 18 | 16 | 18 |
| DP3UM6108041 | 16 | 18 | 16 | 18 |

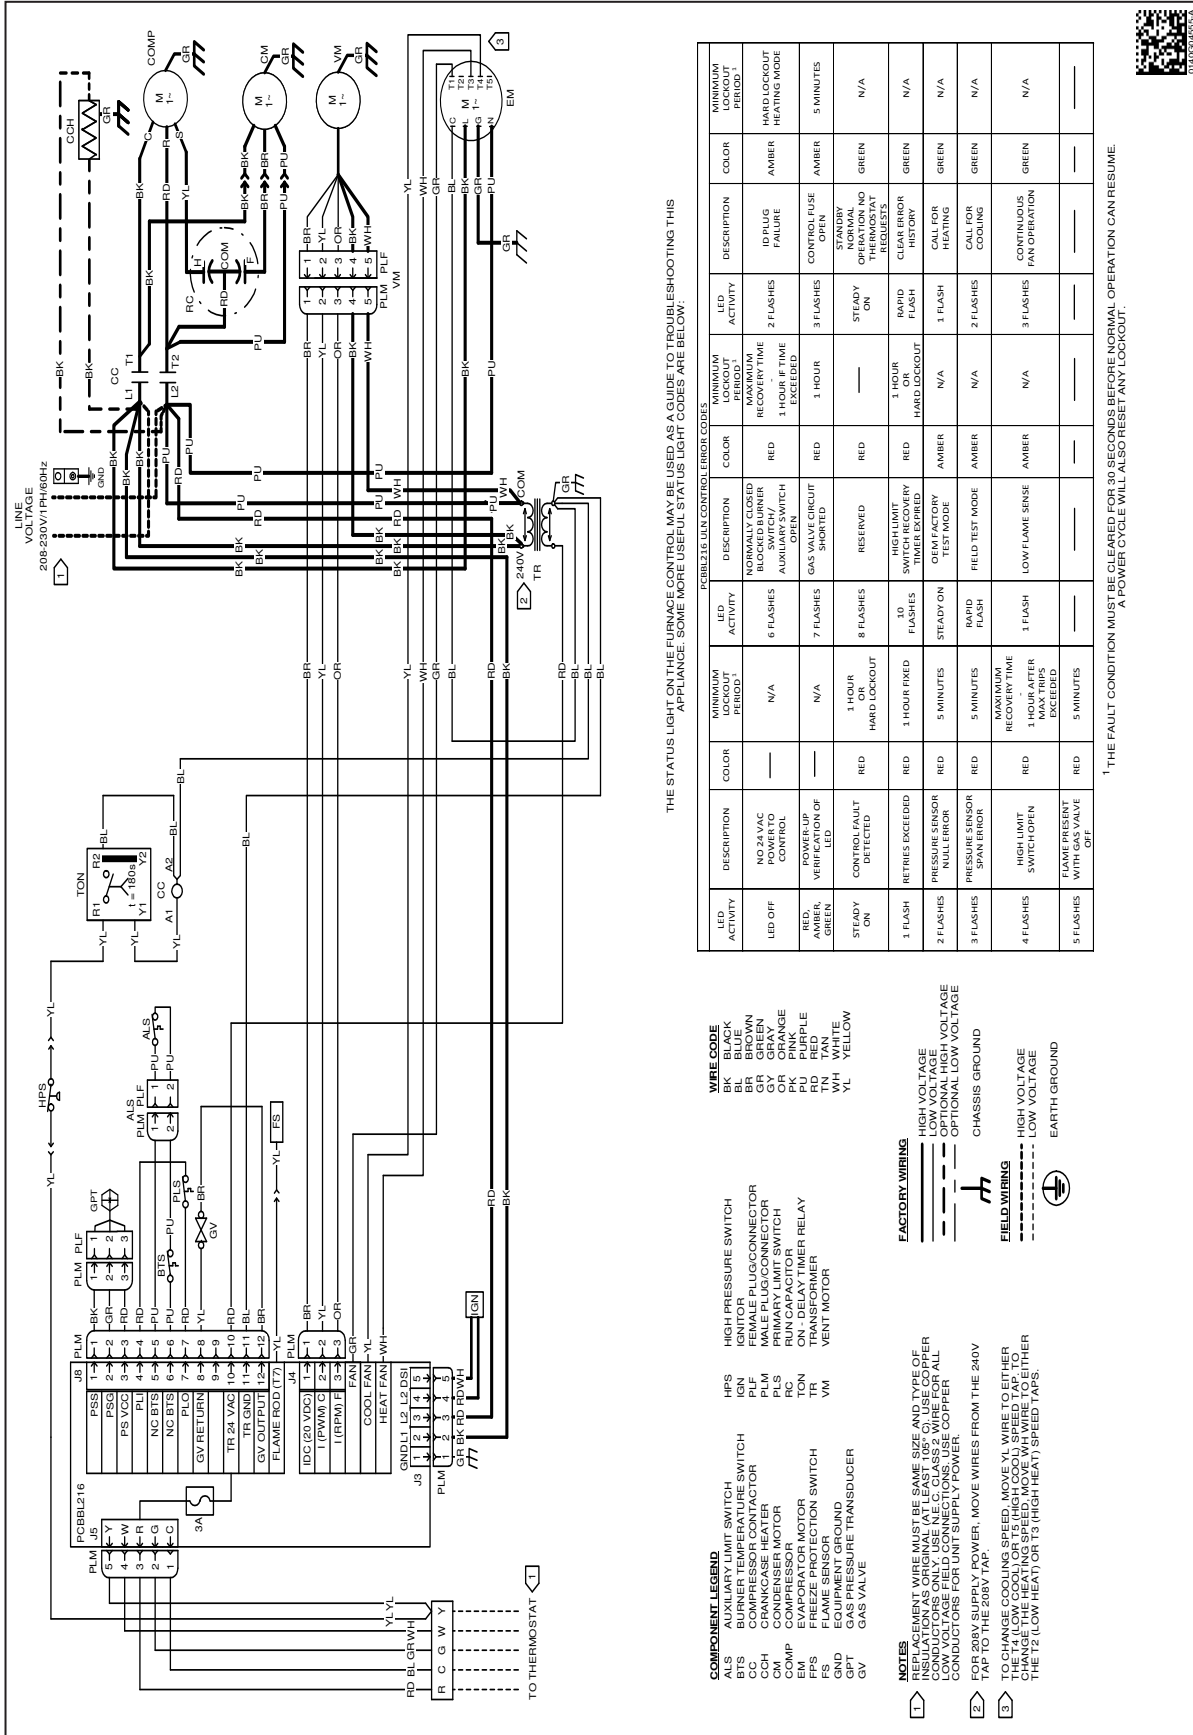

WARNING

High Voltage: Disconnect all power before servicing or installing this unit. Multiple power sources may be present. Failure to do so may cause property damage, personal injury, or death.

1. THE FAULT CONDITION MUST BE CLEARED FOR 30 SECONDS BEFORE NORMAL OPERATION CAN RESUME. A POWER CYCLE WILL ALSO RESET ANY LOCKOUT.

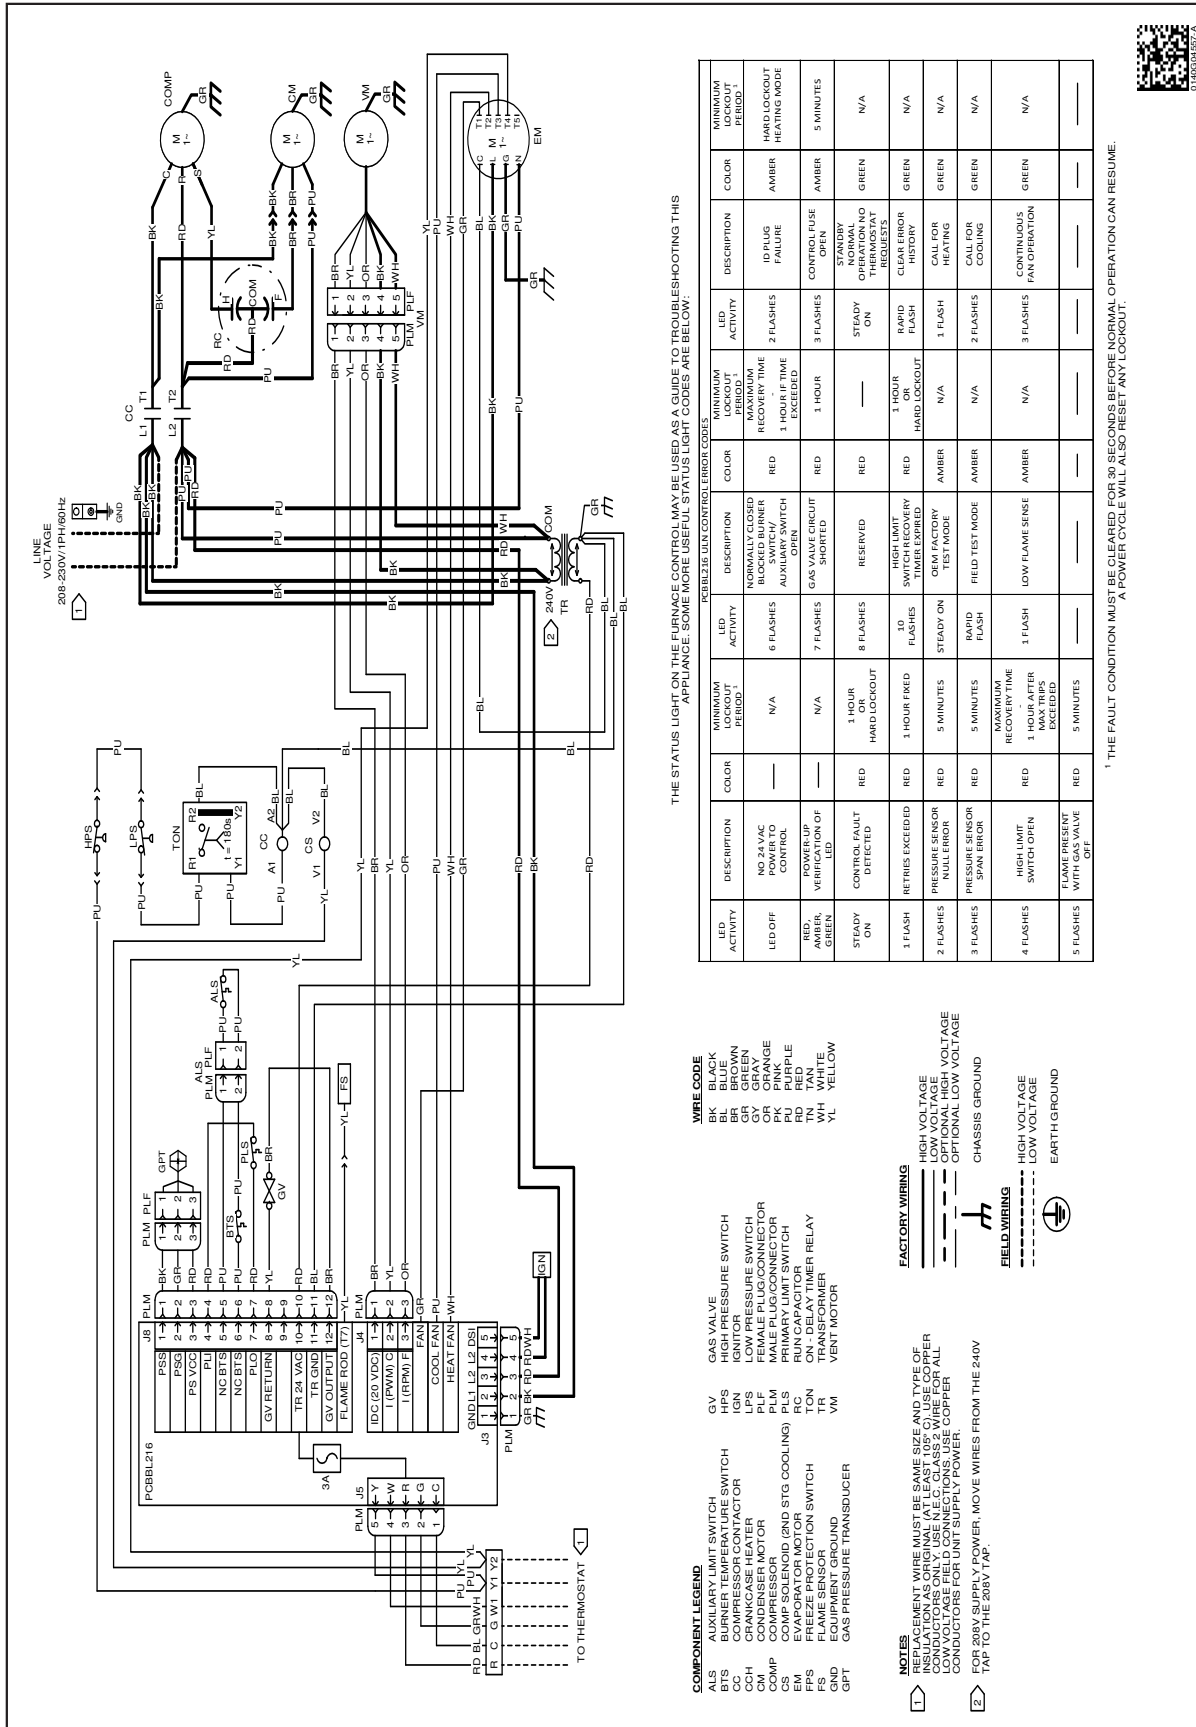

THE STATUS LIGHT ON THE FURNACE CONTROL MAY BE USED AS A GUIDE TO TROUBLESHOOTING THIS APPLIANCE. SOME MORE USEFUL STATUS LIGHT CODES ARE LISTED BELOW:

| LED ACTIVITY | DESCRIPTION | COLOR | MINIMUM RECOVERY PERIOD ¹ | LED ACTIVITY | DESCRIPTION | COLOR | MINIMUM RECOVERY PERIOD ¹ |
|-----------------|--------------------------------------|-------|---|--------------|---|-------|--------------------------------------|
| LED OFF | NO 24V AC POWER TO CONTROL | — | N/A | 6 FLASHES | NORMALLY CLOSED RELEASING SWIMMING AUXILIARY SWITCH | RED | 1 HOUR IF TIME EXCEEDED |
| RED AMBER GREEN | POWER UP VERIFICATION OF CONTROL LED | — | N/A | 7 FLASHES | GAS VALVE CIRCUIT SHORTED | RED | 1 HOUR |
| STEADY ON | CONTROL FAULT DETECTED | RED | 1 HOUR OR HARD LOCKOUT | 8 FLASHES | RESERVED | RED | — |
| 1 FLASH | RETRIS EXCEEDED | RED | 1 HOUR | 10 FLASHES | HIGH LIMIT SWITCH ANY UNRESPONDED | RED | 1 HOUR HARD LOCKOUT |
| 2 FLASHES | PRESSURE SENSOR NULL ERROR | RED | 5 MINUTES | STEADY ON | HEAT FACTORY TEST MODE | AMBER | N/A |
| 3 FLASHES | PRESSURE SENSOR SPAN ERROR | RED | 5 MINUTES | RAPID FLASH | FIELD TEST MODE | AMBER | N/A |
| 4 FLASHES | HIGH LIMIT SWITCH OPEN | RED | RECOVERY TIME 1 HOUR AFTER MAX TRIPS EXCEEDED | 1 FLASH | LOW FLAME SENSE | AMBER | N/A |
| 5 FLASHES | FLAME PRESENCE WITH GAS VALVE OFF | RED | 5 MINUTES | — | — | — | — |

¹ THE FAULT CONDITION MUST BE CLEARED FOR 30 SECONDS BEFORE NORMAL OPERATION CAN RESUME. A POWER CYCLE WILL ALSO RESET ANY LOCKOUT.

WIRE CODE

- BK BLACK
- BR BROWN
- GR GREEN
- OR ORANGE
- PK PURPLE
- RD RED
- TR WHITE
- WH WHITE
- YL YELLOW

COMPONENT LEGEND

- ALS AIR FLOW SWITCH
- ALS ALTERNATE SWITCH
- CC COMPRESSOR CONTACTOR
- CCH CRANKCASE HEATER
- CM COMPRESSOR MOTOR
- CM COMPRESSOR MOTOR
- CS COMP SOLENOID (GND STG COOLING)
- EM EVAPORATOR MOTOR
- FS FREEZE SENSATION SWITCH
- GND EQUIPMENT GROUND
- GND GAS PRESSURE TRANSDUCER
- GPT GAS VALVE
- GV HIGH PRESSURE SWITCH
- IGN IGNITOR
- LFS LOW PRESSURE SWITCH
- PLM FEMALE PLUG-IN CONNECTOR
- PLM MALE PLUG-IN SWITCH
- PLM PRIMARY LIMIT SWITCH
- RC RUN CAPACITOR
- TR ON-BOARD THERMISTOR
- TR ON-BOARD THERMISTOR
- VM VENT MOTOR

FACTORY WIRING

- HIGH VOLTAGE
- LOW VOLTAGE
- OPTIONAL HIGH VOLTAGE
- OPTIONAL LOW VOLTAGE
- CHASSIS GROUND

FIELD WIRING

- HIGH VOLTAGE
- LOW VOLTAGE
- EARTH GROUND

NOTES

- REPLACEMENT WIRE MUST BE SAME SIZE AND TYPE OF INSULATION AS ORIGINAL (AT LEAST 100% USE COPPER CONDUCTORS FOR UNIT SUPPLY POWER).
- FOR 208V SUPPLY POWER, MOVE WIRES FROM THE 240V TAP TO THE 208V TAP.



High Voltage: Disconnect all power before servicing or installing this unit. Multiple power sources may be present. Failure to do so may cause property damage, personal injury, or death.



Wiring is subject to change. Always refer to the wiring diagram on the unit for the most up-to-date wiring.

