

HVRF PKFY-WL-VLM-E / VKM-E

Wall Mounted
Indoor Unit

CITY MULTI

An elegant design combined with compact dimensions and quiet operation make the **PKFY-WL** an ideal indoor unit choice. Noise levels are significantly reduced compared to the previous models.



Key Features & Benefits:


- Compact flat panel design - only 773mm wide (sizes 10-25)
- Widened vane control for improved air distribution and comfort
- Reduced noise levels of 22dB(A) (sizes 10-25)





INDOOR UNITS		PKFY-WL10VLM-E	PKFY-WL15VLM-E	PKFY-WL20VLM-E	PKFY-WL25VLM-E	PKFY-WL32VLM-E	PKFY-WL40VLM-E	PKFY-WL50VKM-E	PKFY-WL63VKM-E	
CAPACITY (kW)	Heating (nominal)	1.4	1.9	2.5	3.2	4.0	5.0	6.3	8.0	
	Cooling (nominal)	1.2	1.7	2.2	2.8	3.6	4.5	5.6	7.1	
	UK Heating	1.4	1.9	2.5	3.2	4.0	5.0	6.3	8.0	
	UK Total Cooling - Hi (Sensible)	1.10 (0.9)	1.5 (1.10)	2.00 (1.50)	2.5 (1.90)	3.2 (2.4)	4.00 (3.0)	5.00 (4.10)	6.4 (5.0)	
	UK Total Cooling - Mi2	1.08	1.45	1.92	2.38	3.09	3.82	4.88	6.05	
POWER INPUT (kW)	UK Total Cooling - Mi1	1.05	1.38	1.78	2.13	2.90	3.53			
	UK Total Cooling - Lo	1.00	1.30	1.61	1.82	2.65	3.12			
POWER INPUT (kW)	Heating (nominal)	0.01	0.01	0.02	0.03	0.03	0.04	0.04	0.05	
	Cooling (nominal)	0.02	0.02	0.03	0.04	0.03	0.05	0.04	0.05	
AIRFLOW (l/s)	Lo-Mi1-Mi2-Hi	55-63-68-75	55-63-72-82	67-83-100-117	67-90-117-140	105-127-150-173	107-137-167-198	300-333	300-367	
SOUND PRESSURE LEVEL (dBA)	Lo-Mi1-Mi2-Hi	22-26-28-30	22-26-29-32	22-28-33-36	22-30-36-41	29-34-38-41	30-36-41-45	39-42	39-45	
WEIGHT (kg)		11	11	11	11	13	20	20	20	
	DIMENSIONS (mm)	Width	773	773	773	773	898	898	1170	1170
		Depth	237	237	237	237	237	237	295	295
Height		299	299	299	299	299	299	365	365	
ELECTRICAL SUPPLY		220-240v, 50/60Hz	220-240v, 50/60Hz	220-240v, 50/60Hz	220-240v, 50/60Hz	220-240v, 50/60Hz	220-240v, 50/60Hz	220-240v, 50/60Hz	220-240v, 50/60Hz	
PHASE		Single	Single	Single	Single	Single	Single	Single	Single	
RUNNING CURRENT (A)	Heating / Cooling	0.15 / 0.20	0.15 / 0.20	0.20 / 0.25	0.30 / 0.35	0.30 / 0.35	0.40 / 0.45	0.40 / 0.46	0.50 / 0.56	
FUSE RATING (BS88) - HRC (A)		6	6	6	6	6	6	6	6	
MAINS CABLE No. Cores		3	3	3	3	3	3	3	3	
WATER PIPE CONNECTION		3/4" BSP SCREW	3/4" BSP SCREW	3/4" BSP SCREW	3/4" BSP SCREW	3/4" BSP SCREW	3/4" BSP SCREW	3/4" BSP SCREW	3/4" BSP SCREW	

Notes: HVRF indoor units can only be configured with the CMB-WM HBC (HVRF) and PURY-(E)M YNW-A1 or PQRY-P YLM-A1 outdoor units.

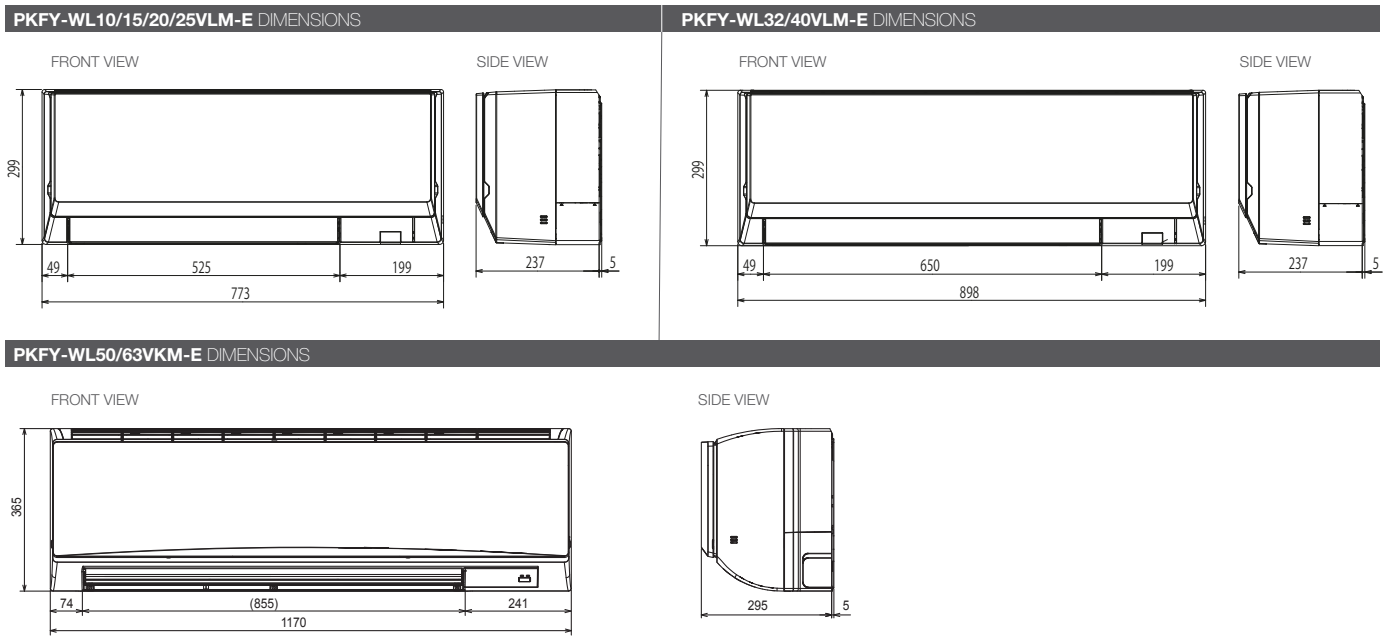

Telephone: 01707 282880
email: air.conditioning@meuk.mee.com
les.mitsubishielectric.co.uk



UNITED KINGDOM Mitsubishi Electric Europe Living Environment Systems Division, Travellers Lane, Hatfield, Hertfordshire, AL10 8XB, England. Telephone: 01707 282880 Fax: 01707 278881
IRELAND Mitsubishi Electric Europe, Westgate Business Park, Ballymount, Dublin 24, Ireland. Telephone: (01) 419 8800 Fax: (01) 419 8890 International code: (003531)

Country of origin: United Kingdom - Japan - Thailand - Malaysia. ©Mitsubishi Electric Europe 2021. Mitsubishi and Mitsubishi Electric are trademarks of Mitsubishi Electric Europe B.V. The company reserves the right to make any variation in technical specification to the equipment described, or to withdraw or replace products without prior notification or public announcement. Mitsubishi Electric is constantly developing and improving its products. All descriptions, illustrations, drawings and specifications in this publication present only general particulars and shall not form part of any contract. All goods are supplied subject to the Company's General Conditions of Sale, a copy of which is available on request. Third-party product and brand names may be trademarks or registered trademarks of their respective owners.

Note: The fuse rating is for guidance only. Please refer to the relevant databook for detailed specification. It is the responsibility of a qualified electrician/electrical engineer to select the correct cable size and fuse rating based on current regulation and site specific conditions. Mitsubishi Electric's air conditioning equipment and heat pump systems contain a fluorinated greenhouse gas, R410A (GWP:2088), R32 (GWP:675), R407C (GWP:1774), R134a (GWP:1430), R513A (GWP:631), R454B (GWP:466), R1234ze (GWP:7) or R1234yf (GWP:4). *These GWP values are based on Regulation (EU) No 517/2014 from IPCC 4th edition. In case of Regulation (EU) No.626/2011 from IPCC 3rd edition, these are as follows. R410A (GWP:1975), R32 (GWP:550), R407C (GWP:1650) or R134a (GWP:1300).

Effective as of May 2021

