

HIGH EFFICIENCY UP TO 19 SEER VARIABLE-SPEED AIR CONDITIONER WITH OBSERVER® COMMUNICATING CONTROL SYSTEM 2 THRU 5 TONS SPLIT SYSTEM

208–230 Volt, 1–phase, 60 Hz

REFRIGERATION CIRCUIT

- Variable speed compressor operates at 5 stages with capacity range from as wide as 25 – 100%
- High pressure switch
- Suction pressure transducer
- Pressure equalizer valve for easy starting
- Compressor discharge temperature sensor
- Coil temperature sensor
- Copper tube/aluminum fin coil

PERFORMANCE

- Up to 13.0 EER
- Integrated inverter control enables 5–stage operation with complete Observer communicating system including Observer control
 - Observer Wall Control with version 5.0 or newer software required
 - Also capable of 2–stage operation with 2–stage thermostat
- Self–configuring installation with Observer Communicating Wall Control
- Compact ECM fan motor driven by integrated inverter control
- Outdoor temperature sensor factory installed
- High–performance compressor sound shield standard
- Isolation compressor grommets
- Enhanced dehumidification

EASY TO INSTALL AND SERVICE

- Text based diagnostics with Observer Communicating Wall Control
- Only 2 control wires required from communicating indoor unit to condenser
- External high and low refrigerant service ports
- Factory charged with R–410A refrigerant
- Adjustments for min and max staging with Observer Wall Control

BUILT TO LAST

- High gloss, baked–on powder coat finish over galvanized steel
- Post–painted (black) coil fins
- Coated inlet grille with 3/8" (10mm) spacing for extra protection (hail guard)
- Corner posts for extra strength and style

WARRANTY*

- 10 year No Hassle Replacement™ limited warranty
- 5 year parts limited warranty (including compressor and coil)
 - With timely registration, an additional 5 year parts limited warranty (including compressor and coil)

* For residential applications only. See Warranty certificate for complete details and restrictions, including warranty coverage for other applications.



TSTAT0201CW
(Sold Separately)



smartsense
TECHNOLOGY



Qualifying models only

This product has been designed and manufactured to meet ENERGY STAR criteria for energy efficiency when matched with appropriate coil components. However, proper refrigerant charge and proper air flow are critical to achieve rated capacity and efficiency. Installation of this product should follow the manufacturer's refrigerant charging and air flow instructions. Failure to confirm proper charge and airflow may reduce energy efficiency and shorten equipment life.



Use of the AHRI Certified TM Mark indicates a manufacturer's participation in the program. For verification of certification for individual products, go to www.ahridirectory.org.

Model Number	Size (tons)	Nominal Btu/hr	Min. Circuit Ampacity	Max. Fuse or Breaker	Operating Dimensions height x length/width (sq.) in. (mm)	Operating/Ship Weight lbs. (kg)
TVA924GKA	2	24,000	13.5	20	31–13/16 x 23–1/8 (807 x 587)	128/150(58/68)
TVA925GKA ‡	2	24,000	23.6	40	38–1/2 x 23–1/8 (980 x 587)	152/177 (69/80)
TVA936GKA	3	36,000	24.2	40		152/177 (69/80)
TVA937GKA ‡	3	36,000	26.0	40	38–15/16 x 31–3/16 (989 x 792)	205/242 (93/110)
TVA948GKA	4	48,000	27.3	40		205/242 (93/110)
TVA949GKA ‡	4	48,000	26.0	40	43–11/16 x 35 (1111 x 889)	249/285 (113/129)
TVA960GKA	5	60,000	40.0	60	42–5/16 x 31–3/16 (1075 x 792)	229/268(104/121)

‡ = Meets Energy Star criteria when matched with appropriate coil

OUTDOOR UNIT MODEL NUMBER IDENTIFICATION GUIDE (single phase)											
Digit Position:	1	2	3	4	5, 6	7	8	9	10	11	12
Example Part Number:	T	V	A	9	24	G	K	A	1	0	0
T = Tempstar Mainline BRANDING											
V = Variable Speed KEY CHARACTERISTIC											
A = Air Conditioner H = Heat Pump TYPE											
6 = 16 SEER 7 = 17 SEER 8 = 18 SEER 9 = 19 SEER NOMINAL EFFICIENCY											
24 = 24,000 BTUH = 2 tons 25 = 24,000 BTUH = 2 tons 36 = 36,000 BTUH = 3 tons 37 = 36,000 BTUH = 3 tons 48 = 48,000 BTUH = 4 tons 60 = 60,000 BTUH = 5 tons NOMINAL CAPACITY											
G = Coil Guard Grille FEATURES											
K = 208/230-1-60 VOLTAGE											
Sales Code											
Engineering Revision											
Extra Digit											
Extra Digit											

ACCESSORIES PART NUMBER IDENTIFICATION GUIDE									
Digit Position:	1	2	3	4	5	6, 7	8, 9	10, 11	
Example Part Number:	N	A	S	A	0	01	01	CH	
N = Non-Branded									
A = Accessory PRODUCT GROUP									
S = Split System (AC & HP) KIT USAGE									
A = Original B = 2nd Generation MAJOR SERIES									
0 = Generic or Not Applicable 2 = R-22 4 = R-410A REFRIGERANT									
Product Identifier Number									
Package Quantity									
Type of Kit (Example: CH = Crankcase Heater)									

PHYSICAL DATA

UNIT SIZE SERIES	24	25	36	37	48	49	60
Compressor Type	Variable Speed Rotary						
REFRIGERANT	R-410A						
Control	TXV (R-410A Hard Shutoff)						
Charge lb (kg)	4.80 (2.18)	5.5 (2.50)	6.0 (2.72)	7.5 (3.40)	7.5 (3.40)	9.6 (4.35)	8.30 (3.76)
COND FAN	Forward Swept Propeller Type, Direct Drive						
Air Discharge	Vertical						
Air Qty (CFM)	2500	2500	2500	4500	4500	4800	4500
Motor HP	1/5	1/3	1/3	1/3	1/3	1/3	1/3
Motor RPM	825	1050	1050	850	850	850	900
COND COIL							
Face Area (Sq ft)	11.12	13.90	13.90	21.50	21.50	27.53	23.65
Fins per In.	20	20	20	20	20	25	20
Rows	1	1	1	1	1	1	1
Circuits	5	6	6	8	8	8	8
VALVE CONNECT. (In. ID)							
Vapor	5/8	3/4	3/4	7/8	7/8	7/8	7/8
Liquid	3/8						
REFRIGERANT TUBES (In. OD)							
Rated Vapor*	3/4	7/8	7/8	1-1/8	1-1/8	1-1/8	1-1/8
Max Liquid Line	3/8						

* Units are rated with 25 ft (7.6 m) of lineset length. See Vapor Line Sizing and Cooling Capacity Loss table when using other sizes and lengths of lineset.

Note: See unit Installation Instruction for proper installation.

REFRIGERANT PIPING LENGTH LIMITATIONS

Maximum Line Lengths:

The maximum allowable total equivalent length for air conditioners can vary depending on the vertical separation. See the tables below for allowable lengths depending on whether the outdoor unit is on the same level, above or below the outdoor unit.

Maximum Line Lengths for Air Conditioner Applications

	MAXIMUM ACTUAL LENGTH ft (m)	MAXIMUM EQUIVALENT LENGTH† ft (m)	MAXIMUM VERTICAL SEPARATION ft (m)
Units on equal level	100 (30.5)	100 (30.5)	N/A
Outdoor unit ABOVE indoor unit	100 (30.5)	100 (30.5)	100 (30.5)
Outdoor unit BELOW indoor unit	See Table 'Maximum Total Equivalent Length: Outdoor Unit BELOW Indoor Unit'		

† Total equivalent length accounts for losses due to elbows or fitting. See the Long Line Guideline for details.

Maximum Total Equivalent Length† – Outdoor Unit BELOW Indoor Unit

Size	Liquid Line Diameter w/ TXV	AC with R-410A Refrigerant – Maximum Total Equivalent Length† Vertical Separation ft (m) Outdoor unit BELOW indoor unit;						
		0-20 (0 - 6.1)	21-30 (6.4 - 9.1)	31-40 (9.4 - 12.2)	41-50 (12.5 - 15.2)	51-60 (15.5 - 18.3)	61-70 (18.6 - 21.3)	71-80 (21.6 - 24.4)
2-Ton	3/8	100*	100*	100*	100*	100*	100*	100*
3-Ton	3/8	100*	100*	100*	100*	100*	100*	100*
4-Ton	3/8	100*	100*	100*	100*	100	100	--
5-Ton	3/8	100*	100*	100*	100*	100	100	--

* Maximum actual length not to exceed 100 ft (30.5 m)

† Total equivalent length accounts for losses due to elbows or fitting.

-- = outside acceptable range

LONG LINE APPLICATIONS

Unit is approved for up to 100 ft (30.5 m) equivalent length and vertical separations shown above with no additional accessories. Longer line set applications are not permitted.

COOLING CAPACITY LOSS TABLE

Nominal Size (Btuh)	Line OD (in.)	TVA9 Cooling Capacity Loss (%)				
		Total Equivalent Line Length (ft)				
		25	50	75	80	100
24	5/8	0.5	1.2	1.8	1.9	2.4
	3/4	0.1	0.4	0.6	0.7	0.8
25	5/8	0.5	1.2	1.8	1.9	2.4
	3/4	0.1	0.4	0.6	0.7	0.8
	7/8	0.0	0.1	0.3	0.3	0.4
36	5/8	1.1	2.4	3.7	4.0	5.0
	3/4	0.3	0.8	1.3	1.4	1.8
37	7/8	0.0	0.3	0.5	0.6	0.8
48	3/4	0.7	1.6	2.4	2.6	3.2
	7/8	0.3	0.7	1.1	1.2	1.6
49	1 1/8	0.0	0.1	0.2	0.3	0.4
60	3/4	1.0	2.3	3.5	3.8	4.8
	7/8	0.4	1.0	1.7	1.8	2.3
	1 1/8	0.0	0.1	0.3	0.4	0.5

Rating Line Size in **BOLD**

MIN/MAX AIRFLOW TABLES

The indoor airflow delivered by this system varies significantly based on outdoor temperature, indoor unit combination, and system demand. The airflows on these tables are for duct design considerations. Duct systems capable of these ranges will ensure the system will deliver full capacity at all outdoor temperatures.

Minimum and maximum airflows can be adjusted from these numbers in the Observer® Control Setup screen.

Cooling – Comfort Mode			Minimum Cooling (Dehum or Zoning)
Size	Max Stage 5 Airflow	Max Stage 1 Airflow	
2–Ton	739	300	300
3–Ton	990	300	300
4–Ton	1389	542	457
5–Ton	1600	700	600

Cooling – Efficiency Mode		
Size	Max Stage 5 Airflow	Max Stage 1 Airflow
2–Ton	825	585
3–Ton	1050	600
4–Ton	1400	875
5–Ton	1800	975

Cooling Max Mode		
Size	Max Stage 5 Airflow	Max Stage 1 Airflow
2–Ton (24)	850	585
2–Ton (25) (550 cfm/ delivered ton)*	1350	510
3–Ton	1200	600
4–Ton	1600	875
4–Ton–49	1450	875
5–Ton	2000	975

LEGEND::

Max Capacity Airflow – Stage 5 airflow varies depending on conditions. This is the highest airflow the system will attempt to deliver in this particular mode. Ductwork for non–zoned systems should be sized for this airflow to ensure the system can deliver full capacity when needed. Improper duct design may result in excessive airflow noise and/or cutback occurrences at max airflow conditions.

Highest Min. Capacity Airflow – Stage 1 airflow also varies depending on conditions. In zoned systems, each zone must be capable of delivering this airflow for the system to deliver full capacity into the zone. Otherwise, airflow may be diverted to other zones or cutback may occur.

Min Cooling (Dehum or Zoning) – Lowest airflow the system will deliver. May operate down to this airflow in dehumidification mode or in zoning applications where ductwork restrictions have caused the blower to cut–back.

ELECTRICAL DATA

UNIT SIZE–VOLTAGE, SERIES	V/PH	OPER VOLTS*		COMPR		FAN	MCA	MAX FUSE ** or CKT BRK AMPS
		MAX	MIN	LRA	RLA	FLA		
24	208/230 –1–60	253	197	N/A	10.3	0.58	13.5	20
25				N/A	17.7	1.20	23.6	40
36				N/A	18.4	1.20	24.2	40
37				N/A	19.6	1.20	26.0	40
48				N/A	20.9	1.20	27.3	40
49				N/A	19.6	1.40	26.0	40
60				N/A	30.9	1.40	40.0	60

* Permissible limits of the voltage range at which the unit will operate satisfactorily

** Time–Delay fuse.

FLA – Full Load Amps

LRA – Locked Rotor Amps

MCA – Minimum Circuit Amps

RLA – Rated Load Amps

NOTE: Control circuit is 24–V on all units and requires external power source. Copper wire must be used from service disconnect to unit.

All motors/compressors contain internal overload protection.

Complies with 2010 requirements of ASHRAE Standards 90.1

CHARGING SUBCOOLING (TXV-TYPE EXPANSION DEVICE)

UNIT SIZE-VOLTAGE, SERIES	Subcooling recommendation displayed in Charging Mode the subcooling chart shown on the charging label must be followed
24	
25	
36	
37	
48	
49	
60	

RPM-CAPACITY-SOUND (dBA)*

TVA924			
1	1500	35%	56
2	2566	56%	60
3	3150	69%	65
4	3950	87%	66
5	4700	100%	67
TVA925			
1	1200	36%	56
2	1900	58%	61
3	2400	73%	63
4	2600	79%	67
5	3300	100%	69
TVA936			
1	1200	25%	57
2	2400	50%	61
3	3300	69%	65
4	4200	88%	69
5	4800	100%	71
TVA937			
1	1200	40%	57
2	1800	60%	63
3	2200	73%	67
4	2600	87%	67
5	3000	100%	68
TVA948			
1	1500	35%	63
2	2460	57%	65
3	2800	65%	67
4	3650	84%	70
5	4320	100%	72
TVA949			
1	1200	38%	58
2	1840	59%	62
3	2300	74%	66
4	2700	87%	68
5	3120	100%	74
TVA960			
1	1200	32%	58
2	2180	55%	61
3	2850	70%	64
4	3700	90%	70
5	4140	100%	72

*Estimated sound for stages 2, 3, and 4
 For 2-stage operation: Low = Stage 2, High = Stage 5

SOUND POWER LEVEL (dBA)

Unit Size—Voltage, Series	Typical Octave Band Spectrum (without tone adjustment)	Min Speed Cooling	Max Speed Cooling
24	Freq (Hz)	1500 RPM	4700 RPM
	125	40.5	44.0
	250	45.5	49.5
	500	41.5	53.0
	1000	44.0	52.5
	2000	39.0	50.5
	4000	34.5	53.0
	8000	31.0	45.0
	Sound Rating (dBA)	56	67
25	Freq (Hz)	1200 RPM	3300 RPM
	125	40.4	45.4
	250	44.4	57.9
	500	46.3	61.3
	1000	45.0	58.0
	2000	37.2	54.7
	4000	31.0	52.0
	8000	28.4	41.9
	Sound Rating (dBA)	56	69
36	Freq (Hz)	1200 RPM	4800 RPM
	125	40.4	43.9
	250	44.4	53.9
	500	46.3	61.8
	1000	45.0	59.0
	2000	37.2	56.7
	4000	31.0	60.0
	8000	28.4	45.4
	Sound Rating (dBA)	57	71
37	Freq (Hz)	1200	3000
	125	45.0	54.5
	250	48.5	59.0
	500	50.5	63.0
	1000	50.0	60.5
	2000	44.0	59.5
	4000	37.5	57.5
	8000	44.5	52.0
	Sound Rating (dBA)	57	68
48	Freq (Hz)	1500 RPM	4320 RPM
	125	40.9	42.4
	250	46.4	54.4
	500	47.3	60.3
	1000	56.5	63.5
	2000	39.2	56.7
	4000	35.0	56.0
	8000	31.9	44.9
	Sound Rating (dBA)	63	72
49	Freq (Hz)	1200	3120
	125	44.5	52.0
	250	48.5	63.0
	500	50.5	63.5
	1000	51.5	67.5
	2000	47.5	61.5
	4000	43.5	58.5
	8000	47.5	54.5
	Sound Rating (dBA)	58	74
60	Freq (Hz)	1200 RPM	4140 RPM
	125	39.0	49.5
	250	48.0	59.5
	500	46.5	62.0
	1000	45.5	60.0
	2000	39.5	58.5
	4000	36.5	55.0
	8000	35.5	48.0
	Sound Rating (dBA)	58	72

NOTE: Tested in compliance with AHRI 270–2008 but not listed with AHRI.

DIMENSIONS – ENGLISH


UNIT	SERIES	ELECTRICAL CHARACTERISTICS	A	B	C	D	E	F	G	K	L	M	N	P	OPERATING WEIGHT (lbs)	SHIPPING WEIGHT (lbs)	SHIPPING DIMENSIONS (L x W x H)
*VA9246KA	1	X 0 0	23 1/8"	31 13/16"	3 3/4"	3/4"	4 7/16"	18 1/16"	7 13/16"	2 13/16"	1/2"	11 1/4"	11 1/4"	14 1/2"	128	160	25 1/4" X 25 1/4" X 35 5/8"
*VA9256KA	1	X 0 0	23 1/8"	38 1/2"	3 3/4"	3/4"	4 7/16"	18 1/16"	7 13/16"	2 13/16"	1/2"	10 3/4"	10 3/4"	18 1/4"	152	177	25 1/4" X 25 1/4" X 43 3/8"
*VA9366KA	1	X 0 0	23 1/8"	38 1/2"	3 3/4"	3/4"	4 7/16"	18 1/16"	7 13/16"	2 13/16"	1/2"	10 3/4"	10 3/4"	18 1/4"	152	177	25 1/4" X 25 1/4" X 43 3/8"
*VA9376KA	1	X 0 0	31 3/16"	38 15/16"	3 7/8"	7/8"	6 9/16"	24 11/16"	9 1/8"	2 15/16"	5/8"	14 1/2"	14 5/8"	18 3/4"	205	242	33 3/8" X 33 3/8" X 46 1/8"
*VA9486KA	1	X 0 0	31 3/16"	38 15/16"	3 7/8"	7/8"	6 9/16"	24 11/16"	9 1/8"	2 15/16"	5/8"	14 1/2"	14 5/8"	18 3/4"	205	242	33 3/8" X 33 3/8" X 46 1/8"
*VA9496KA	1	X 0 0	35"	43 11/16"	3 7/8"	7/8"	6 9/16"	28 7/16"	9 1/8"	2 15/16"	5/8"	16 1/4"	16 1/4"	21 1/4"	249	285	36 1/8" X 36 1/8" X 50 3/16"
*VA9606KA	1	X 0 0	31 3/16"	42 5/16"	3 7/8"	7/8"	6 9/16"	24 11/16"	9 1/8"	2 15/16"	5/8"	16 1/2"	15"	20"	229	268	33 3/8" X 33 3/8" X 49 9/16"

UNIT SIZE	"X" MIN GROUND MOUNTING PAD APPLICATION DIMENSIONS	"Y" MIN ROOF-TOP MOUNTING PAD APPLICATION DIMENSIONS
24, 25, 36	23 1/8"	17 3/4"
37, 48, 60	31 3/16"	20 7/16"
49	35"	23"
		26 3/4"

- NOTES:
- ALLOW 30" CLEARANCE TO SERVICE SIDE OF UNIT, 48" ABOVE UNIT, 6" ON ONE SIDE, 12" ON REMAINING SIDE, AND 24" BETWEEN UNITS FOR PROPER AIRFLOW.
 - MINIMUM OUTDOOR OPERATING AMBIENT IN COOLING MODE IS 55°F, MAX. 115°F.
 - SERIES DESIGNATION IS THE 10TH POSITION OF THE UNIT MODEL NUMBER.
 - CENTER OF GRAVITY
 - ALL DIMENSIONS ARE IN "INCHES" UNLESS NOTED.

X = YES
O = NO

208/230-160	230-160	208/230-360	460-360
-------------	---------	-------------	---------

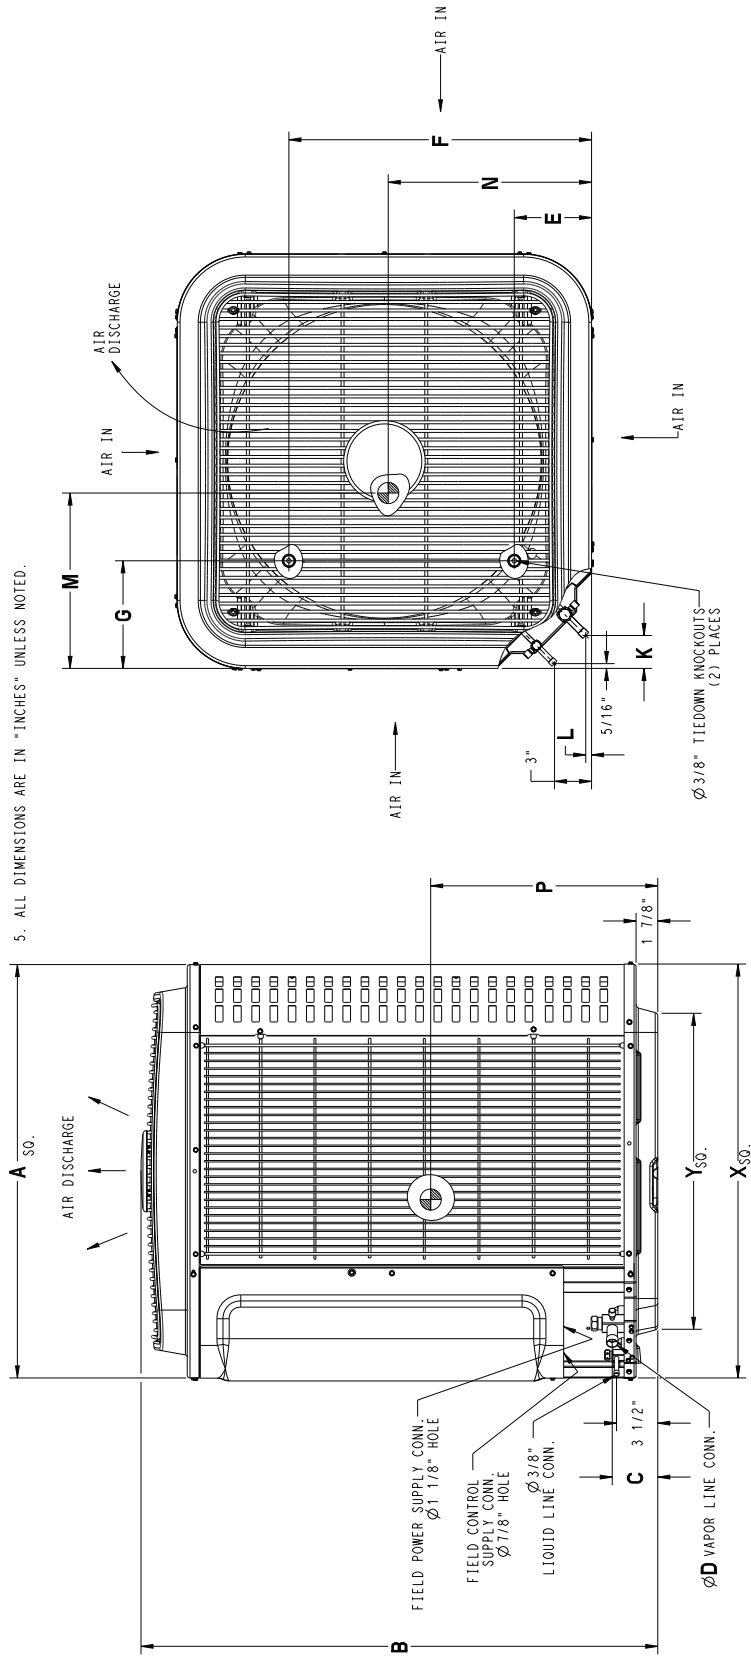

Representative drawing only, some models may vary in appearance.

SD5337-4 REV C

* = C, H, T

8 DIMENSIONS – SI


UNIT	SERIES	ELECTRICAL CHARACTERISTICS	A	B	C	D	E	F	G	K	L	M	N	P	OPERATING WEIGHT (Kgs)	SHIPPING WEIGHT (Kgs)	SHIPPING DIMENSIONS (L x W x H)
YA924GKA	1	X 0 0 0	587.3	807.3	96.1	19.1	112.7	458.8	198.4	71.4	12.7	285.8	285.8	368.3	58	68	641.5 X 641.5 X 905.2
YA925GKA	1	X 0 0 0	587.3	980.1	96.1	19.1	112.7	458.8	198.4	71.4	12.7	273.1	273.1	463.6	69	80	641.5 X 641.5 X 1102.2
YA936GKA	1	X 0 0 0	587.3	980.1	96.1	19.1	112.7	458.8	198.4	71.4	12.7	273.1	273.1	463.6	69	80	641.5 X 641.5 X 1102.2
YA937GKA	1	X 0 0 0	792.2	988.5	98.4	22.2	166.7	627.1	231.8	74.6	15.9	368.3	371.5	476.3	93	110	846.6 X 846.6 X 1172.2
YA948GKA	1	X 0 0 0	792.2	988.5	98.4	22.2	166.7	627.1	231.8	74.6	15.9	368.3	371.5	476.3	93	110	846.6 X 846.6 X 1172.2
YA949GKA	1	X 0 0 0	889.0	1111.0	98.4	22.2	166.7	722.3	231.8	74.6	15.9	412.8	412.8	539.8	113	124	917.7 X 917.7 X 1274.9
YA960GKA	1	X 0 0 0	792.2	1074.9	98.4	22.2	166.7	627.1	231.8	74.6	15.9	419.1	381.0	508.0	104	121	846.6 X 846.6 X 1258.6

UNIT SIZE	X* MN GROUND MOUNTING PAD APPLICATION DIMENSIONS	Y* MN ROOF-TOP MOUNTING PAD APPLICATION DIMENSIONS
24,25,36	587.4	451.3
-	654.0	518.5
37,48,60	792.2	583.2
49	889.0	679.7

- NOTES:
- ALLOW 762.0 CLEARANCE TO SERVICE SIDE OF UNIT, 1219.2 ABOVE UNIT, 152.4 ON ONE SIDE, 304.8 ON REMAINING SIDE, AND 609.6 BETWEEN UNITS FOR PROPER AIRFLOW.
 - MINIMUM OUTDOOR OPERATING AMBIENT IN COOLING MODE IS 13°C, MAX. 46°C.
 - SERIES DESIGNATION IS THE 10TH POSITION OF THE UNIT MODEL NUMBER.
 - CENTER OF GRAVITY
 - ALL DIMENSIONS ARE IN "MM" UNLESS NOTED.

X = YES
O = NO

460-3-60
208/230-3-60
230-1-60
208/230-1-60

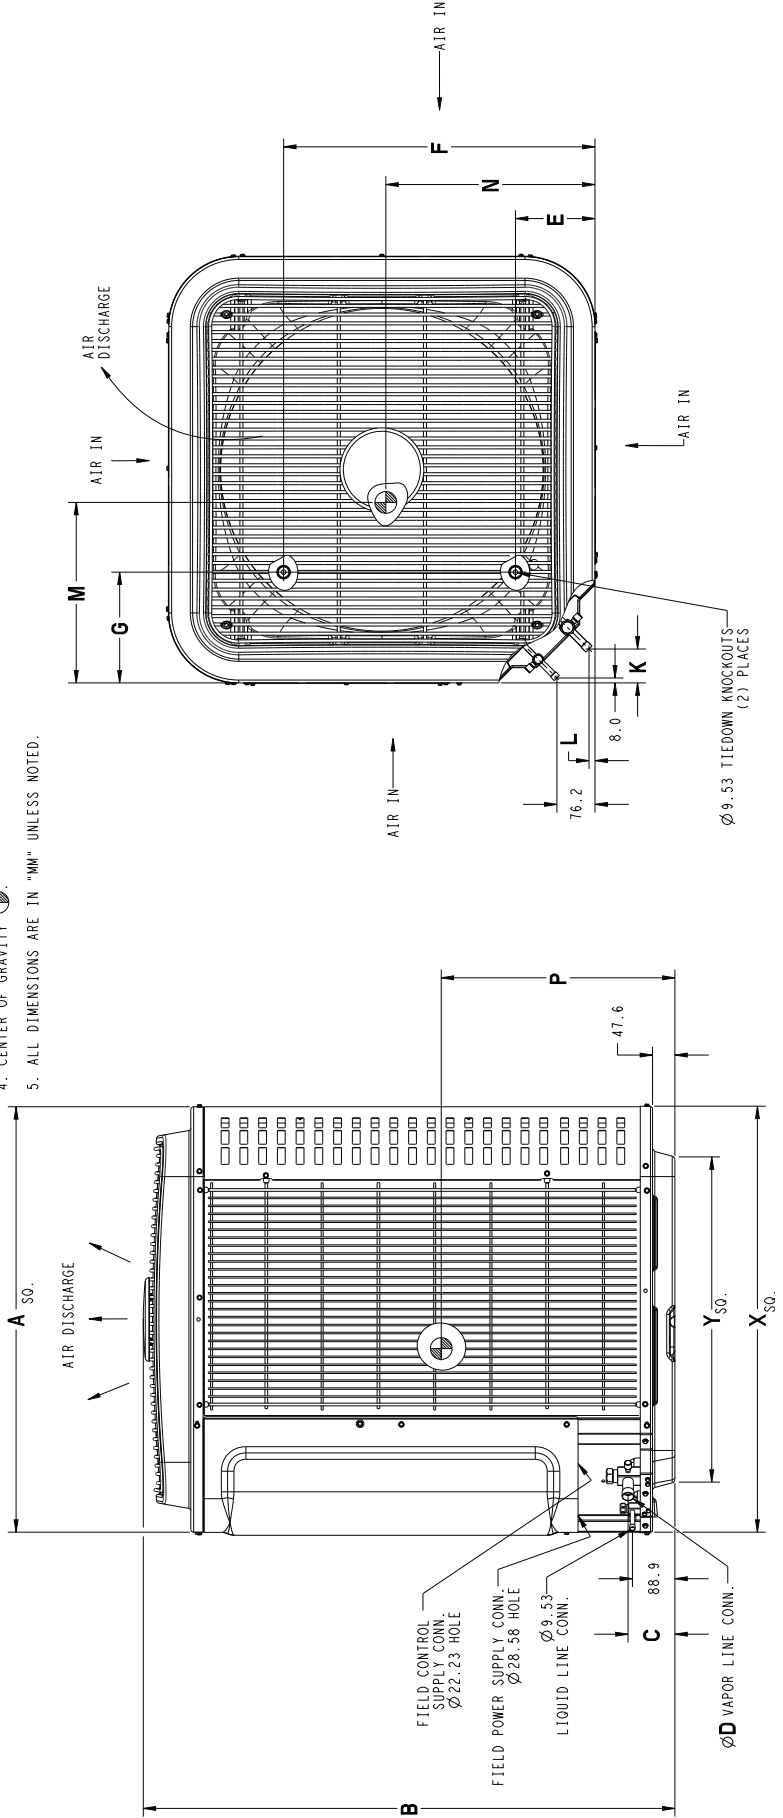

Representative drawing only, some models may vary in appearance.

SD5637-4 REV C

* = C, H, T

TESTED AHRI COMBINATION RATINGS*

NOTE: Ratings contained in this document are subject to change at any time.
 For AHRI ratings certificates, please refer to the AHRI directory. www.ahrirectory.org
 Additional ratings and system combinations can be accessed via the Tempstar database at:
<http://www.icpeep.com/AHRIratings/ratings.aspx?Brand=Tempstar>

Or scan this QR code:



Model Number	Coil Model Number	Furnace Model Number	Stages	Cooling Capacity High	SEER	EER	ID CFM
TVA924GKA101	FCM4X24***L + WALLCON		5	24,000	18.0	11.0	825
TVA924GKA101	FVM4X24***L		2	23,800	16.0	11.0	700
TVA925GKA101	FCM4X48***L + WALLCON		5	24,000	19.0	12.5	825
TVA925GKA101	FVM4X36***L		2	22,600	19.0	12.2	700
TVA936GKA101	FCM4X48***L + WALLCON		5	35,000	18.0	10.5	1050
TVA936GKA101	FVM4X48***L		2	35,000	16.0	10.5	1050
TVA937GKA101	FCM4X60***L + WALLCON		5	33,600	19.0	13.0	1050
TVA948GKA101	FCM4X60***L + WALLCON		5	46,500	19.0	11.0	1400
TVA948GKA101	FVM4X60***L		2	46,000	15.5	11.0	1400
TVA949GKA101	FCM4X60***L + WALLCON		5	45,500	19	12.5	1400
TVA960GKA101	FCM4X60***L + WALLCON		5	57,000	17.0	10.0	1600
TVA960GKA101	FVM4X60***L		2	57,500	15.0	10.0	1750

Ratings with “+ WALLCON” are communicating systems with Observer® Wall Control and 5–stages of operation.
 Ratings without “+ WALLCON” are non–communicating systems with 2–stage operation.

* Ratings are net values reflecting the effects of circulating fan heat. Supplemental electric heat is not included. Ratings are based on:
Cooling Standard: 80°F (27°C) db 67°F (19°C) wb indoor entering air temperature and 95°F (35°C) db air entering outdoor unit.

EER — Energy Efficiency Ratio

SEER — Seasonal Energy Efficiency Ratio

WALLCON — Wall Control

NOTE: Ratings contained in this document are subject to change at any time.

TVA924

DETAILED COOLING CAPACITIES# - EFFICIENCY MODE

EDB °F (°C)	EVAAP AIR	TVA924 / FCMA424***L Efficiency Mode Condenser Entering Air Temperature °F (°C)										TVA924 / FCMA424***L Comfort + Dehumidify Mode Condenser Entering Air Temperature °F (°C)																			
		115 (46.1)					105 (40.5)					95 (35)					85 (29.4)					75 (23.9)					65 (18.3)				
		ID SCFM	Capacity MBtuh	Total Sensit	Total Sys. KW**	ID SCFM	Capacity MBtuh	Total Sensit	Total Sys. KW**	ID SCFM	Capacity MBtuh	Total Sensit	Total Sys. KW**	ID SCFM	Capacity MBtuh	Total Sensit	Total Sys. KW**	ID SCFM	Capacity MBtuh	Total Sensit	Total Sys. KW**	ID SCFM	Capacity MBtuh	Total Sensit	Total Sys. KW**						
75 (23.9)	72(22.2)	23.43	9.90	2.85	25.03	10.49	2.52	11.02	2.20	26.46	11.02	2.20	28.00	11.60	1.91	1.63	29.51	12.16	1.63	1.63	31.01	12.73	1.37	1.37							
	67(19.4)	21.30	13.70	2.81	22.76	14.32	2.49	21.07	17.94	2.17	24.07	14.89	2.18	25.46	15.50	1.90	1.63	26.82	16.10	1.63	1.63	28.19	16.70	1.38							
	63(17.2)	19.74	16.69	2.78	21.07	17.34	2.47	20.78	20.78	2.15	20.78	20.78	2.15	21.79	17.94	1.88	1.63	22.78	22.78	1.63	1.63	24.15	19.82	1.39							
80 (26.7)	72(22.2)	23.36	13.70	2.85	24.96	14.32	2.52	26.39	14.68	2.20	27.93	15.49	1.91	29.44	16.09	1.63	1.63	30.94	16.69	1.37	1.37	32.41	17.27	1.37							
	67(19.4)	21.24	17.45	2.81	22.69	18.11	2.49	24.00	18.72	2.18	25.39	19.36	1.90	26.76	19.99	1.63	1.63	28.12	20.63	1.38	1.38	29.60	21.21	1.38							
	63(17.2)	19.96	19.96	2.78	21.18	20.93	2.47	22.35	21.63	2.17	23.61	22.34	1.89	24.86	23.02	1.63	1.63	26.10	23.70	1.38	1.38	27.58	24.30	1.38							
75 (23.9)	72(22.2)	16.60	7.18	1.72	17.75	7.59	1.53	18.75	7.96	1.31	19.88	8.37	1.12	20.99	8.78	0.94	0.94	22.08	9.18	0.77	0.77	23.27	9.57	0.77							
	67(19.4)	15.01	10.22	1.72	16.06	10.66	1.53	16.99	11.06	1.32	18.00	11.49	1.14	18.99	11.92	0.97	0.97	19.97	12.34	0.81	0.81	20.94	12.73	0.81							
	63(17.2)	13.88	12.59	1.71	14.82	13.06	1.54	15.70	13.48	1.32	16.62	13.94	1.15	17.52	14.38	0.99	0.99	18.40	14.82	0.84	0.84	19.37	15.21	0.84							
80 (26.7)	72(22.2)	16.54	10.24	1.72	17.69	10.68	1.53	18.68	11.07	1.31	19.81	11.51	1.12	20.92	11.94	0.94	0.94	22.01	12.37	0.77	0.77	23.20	12.76	0.77							
	67(19.4)	14.98	13.23	1.72	16.01	13.70	1.53	16.94	14.13	1.32	17.95	14.59	1.14	18.93	15.05	0.97	0.97	19.91	15.50	0.81	0.81	20.88	15.89	0.81							
	63(17.2)	14.42	14.42	1.72	15.24	15.24	1.53	15.99	15.99	1.32	16.77	16.77	1.15	17.61	17.39	0.99	0.99	18.46	17.89	0.83	0.83	19.34	18.23	0.83							
75 (23.9)	72(22.2)	14.01	6.30	1.38	15.00	6.65	1.24	16.00	7.00	1.04	17.00	7.40	0.84	18.00	7.80	0.64	0.64	19.00	8.20	0.48	0.48	20.00	8.60	0.48							
	67(19.4)	12.64	9.35	1.39	13.52	9.73	1.25	14.49	10.16	1.06	15.46	10.63	0.84	16.43	11.10	0.64	0.64	17.40	11.54	0.48	0.48	18.37	11.92	0.48							
	63(17.2)	11.71	11.62	1.39	12.49	12.06	1.26	13.46	12.63	1.06	14.43	13.20	0.84	15.40	13.97	0.64	0.64	16.37	14.64	0.48	0.48	17.34	15.02	0.48							
80 (26.7)	72(22.2)	13.95	9.39	1.38	14.94	9.76	1.24	15.92	10.16	1.04	16.89	10.63	0.84	17.86	11.06	0.64	0.64	18.83	11.54	0.48	0.48	19.80	12.02	0.48							
	67(19.4)	12.66	12.32	1.39	13.52	12.75	1.25	14.49	13.16	1.06	15.46	13.97	0.84	16.43	14.80	0.64	0.64	17.40	15.64	0.48	0.48	18.37	16.02	0.48							
	63(17.2)	12.55	12.55	1.39	13.28	13.28	1.26	14.01	13.28	1.06	14.74	13.28	0.84	15.46	13.28	0.64	0.64	16.89	14.01	0.48	0.48	17.86	14.74	0.48							

Operation in this area is restricted to maintain reliable system operation and customer comfort. The system will default to the next available stage

Stage 1 - Compressor speed limited to stage two at 105 and 115 outdoor.

DETAILED COOLING CAPACITIES# - COMFORT + DEHUMIDIFY MODE

EDB °F (°C)	EVAAP AIR	TVA924 / FCMA424***L Comfort + Dehumidify Mode Condenser Entering Air Temperature °F (°C)										TVA924 / FCMA424***L Efficiency Mode Condenser Entering Air Temperature °F (°C)																			
		115 (46.1)					105 (40.5)					95 (35)					85 (29.4)					75 (23.9)					65 (18.3)				
		ID SCFM	Capacity MBtuh	Total Sensit	Total Sys. KW**	ID SCFM	Capacity MBtuh	Total Sensit	Total Sys. KW**	ID SCFM	Capacity MBtuh	Total Sensit	Total Sys. KW**	ID SCFM	Capacity MBtuh	Total Sensit	Total Sys. KW**	ID SCFM	Capacity MBtuh	Total Sensit	Total Sys. KW**	ID SCFM	Capacity MBtuh	Total Sensit	Total Sys. KW**						
75 (23.9)	72(22.2)	24.23	9.92	2.44	25.33	10.31	2.12	26.93	10.95	1.84	28.54	11.60	1.58	30.28	12.32	1.33	31.97	13.00	1.13	1.13	33.71	13.70	0.92	0.92							
	67(19.4)	22.01	12.96	2.42	23.01	13.22	2.10	24.45	14.00	1.83	25.91	14.82	1.58	27.51	15.77	1.34	29.26	16.49	1.13	1.13	30.94	17.44	0.92	0.92							
	63(17.2)	20.38	15.34	2.39	21.31	15.50	2.08	22.64	16.40	1.82	24.00	17.33	1.57	25.48	18.47	1.35	26.82	19.37	1.13	1.13	28.19	20.34	0.92	0.92							
80 (26.7)	72(22.2)	24.17	12.95	2.44	25.27	13.22	2.12	26.87	14.00	1.84	28.48	14.82	1.58	30.22	15.77	1.33	31.97	16.49	1.13	1.13	33.71	17.19	0.92	0.92							
	67(19.4)	21.96	15.96	2.42	22.96	16.09	2.10	24.40	17.02	1.83	25.86	17.99	1.58	27.45	19.17	1.34	29.12	20.49	1.13	1.13	31.86	21.46	0.92	0.92							
	63(17.2)	20.36	18.31	2.39	21.28	18.35	2.08	22.61	19.39	1.82	23.97	20.49	1.57	25.45	21.85	1.35	27.12	22.54	1.13	1.13	29.12	23.97	0.92	0.92							
75 (23.9)	72(22.2)	16.80	6.88	1.49	17.53	7.13	1.28	18.69	7.60	1.10	19.82	8.06	0.92	21.04	8.55	0.76	22.29	8.94	0.53	0.53	23.54	9.41	0.41	0.41							
	67(19.4)	15.18	8.96	1.50	16.06	9.13	1.28	17.26	9.72	1.11	18.49	10.28	0.95	19.97	10.93	0.79	21.21	11.66	0.53	0.53	22.94	12.54	0.41	0.41							
	63(17.2)	13.98	10.59	1.50	14.60	10.69	1.28	15.56	11.37	1.13	16.64	12.01	0.97	17.72	12.77	0.82	18.87	13.48	0.53	0.53	20.04	14.41	0.41	0.41							
80 (26.7)	72(22.2)	16.75	8.99	1.49	17.48	9.16	1.28	18.64	9.75	1.14	19.97	10.32	0.92	21.21	10.97	0.76	22.46	11.34	0.53	0.53	23.69	12.21	0.41	0.41							
	67(19.4)	15.14	11.05	1.50	16.01	11.13	1.28	17.02	11.84	1.11	18.26	12.51	0.95	19.51	13.31	0.79	20.79	14.54	0.53	0.53	22.29	15.46	0.41	0.41							
	63(17.2)	13.97	12.66	1.50	14.89	12.68	1.28	15.84	13.48	1.13	16.81	14.23	0.97	17.86	15.14	0.82	18.94	16.47	0.53	0.53	20.04	17.41	0.41	0.41							
75 (23.9)	72(22.2)	13.91	5.70	1.21	14.84	6.03	1.04	15.88	6.41	0.84	16.99	6.78	0.64	18.14	7.16	0.48	19.37	7.54	0.32	0.32	20.64	7.91	0.21	0.21							
	67(19.4)	12.50	7.42	1.22	13.48	7.48	1.04	14.56	7.97	0.84	15.72	8.34	0.64	16.99	8.61	0.48	18.40	9.06	0.32	0.32	19.79	9.48	0.21	0.21							
	63(17.2)	11.48	8.77	1.22	12.31	8.85	0.92	13.28	9.34	0.64	14.56	9.71	0.48	16.06	10.04	0.32	17.44	10.41	0.21	0.21	18.61	10.93	0.21	0.21							
80 (26.7)	72(22.2)	13.87	7.46	1.21	14.81	7.81	1.04	15.84	8.18	0.84	16.91	8.55	0.64	18.14	8.92	0.48	19.37	9.30	0.32	0.32	20.64	9.67	0.21	0.21							
	67(19.4)	12.47	9.17	1.22	13.44	9.25	1.04	14.41	9.74	0.84	15.64	10.11	0.64	17.09	10.41	0.32	18.26	10.88	0.21	0.21	19.51	11.79	0.21	0.21							
	63(17.2)	11.48	10.51	1.22	12.31	10.68	0.92	13.28	11.13	0.84	14.41	11.66	0.64	16.06	12.41	0.32	17.44	13.14	0.21	0.21	18.61	14.06	0.21	0.21							

Operation in this area is restricted to maintain reliable system operation and customer comfort. The system will default to the next available stage

Stage 1 - Compressor speed limited to stage two at 105 outdoor.

See additional notes on page 28

TVA925 / FCIMX48***L Comfort + Dehumidify Mode CONTINUED

EDB °F (°C)	EVAP AIR WB/GP °F (°C)	TVA925 / FCIMX48***L Comfort + Dehumidify Mode Condenser Entering Air Temperature °F (°C)										TVA925 / FCIMX48***L Comfort + Dehumidify Mode Condenser Entering Air Temperature °F (°C)										
		105 (40.5)					95 (35)					75 (23.9)					65 (18.3)					
		ID SCFM	Capacity Total	MBH/uh Sensit	Total Sys. KW	Total Sys. KW	ID SCFM	Capacity Total	MBH/uh Sensit	Total Sys. KW	Total Sys. KW	ID SCFM	Capacity Total	MBH/uh Sensit	Total Sys. KW	Total Sys. KW	ID SCFM	Capacity Total	MBH/uh Sensit	Total Sys. KW	Total Sys. KW	
75 (23.9)	72 (22.2)	19.25	8.01	1.62	1.88	25.24	10.26	1.88	1.88	26.68	10.84	1.61	1.61	1.34	1.34	28.11	11.43	1.34	1.34	29.64	12.06	1.07
	67 (19.4)	17.48	10.88	1.63	1.89	22.98	13.18	1.89	1.89	24.31	13.92	1.63	1.63	1.38	1.38	25.64	14.68	1.38	1.38	27.06	15.57	1.13
	63 (17.2)	16.21	13.13	1.64	1.90	21.29	15.45	1.90	1.90	22.54	16.31	1.65	1.65	1.41	1.41	23.79	17.21	1.41	1.41	25.13	18.30	1.17
	57 (13.9)	15.18	15.18	1.65	1.90	19.10	18.78	1.90	1.90	20.23	19.83	1.66	1.66	1.44	1.44	21.37	20.92	1.44	1.44	22.62	22.29	1.21
	72 (22.2)	19.12	10.84	1.61	1.88	25.12	13.12	1.88	1.88	26.55	13.85	1.60	1.60	1.33	1.33	27.98	14.60	1.33	1.33	29.49	15.47	1.07
80 (26.7)	67 (19.4)	17.42	13.69	1.63	1.89	22.91	16.02	1.89	1.89	24.24	16.91	1.63	1.63	1.38	1.38	25.56	17.83	1.38	1.38	26.97	18.96	1.13
	63 (17.2)	16.26	15.91	1.64	1.90	21.26	18.28	1.90	1.90	22.51	19.29	1.65	1.65	1.41	1.41	23.76	20.35	1.41	1.41	25.10	21.68	1.17
	57 (13.9)	16.12	16.12	1.64	1.90	20.08	20.08	1.90	1.90	21.23	21.23	1.66	1.66	1.42	1.42	22.41	22.41	1.42	1.42	23.77	23.77	1.19
	72 (22.2)	15.62	6.37	1.16	1.03	16.33	6.64	1.03	1.03	17.27	7.02	0.91	0.91	0.78	0.78	18.26	7.42	0.78	0.78	19.32	7.87	0.62
	67 (19.4)	14.19	8.25	1.17	1.04	14.88	8.57	1.04	1.04	15.74	9.03	0.94	0.94	0.82	0.82	16.66	9.56	0.82	0.82	17.64	10.18	0.68
75 (23.9)	63 (17.2)	13.12	9.74	1.18	1.05	13.79	10.07	1.05	1.05	14.60	10.61	0.96	0.96	0.85	0.85	15.46	11.23	0.85	0.85	16.38	12.00	0.71
	57 (13.9)	11.80	11.80	1.18	1.06	12.35	12.27	1.06	1.06	13.08	12.91	0.97	0.97	0.88	0.88	13.87	13.68	0.88	0.88	14.74	14.65	0.76
	72 (22.2)	15.55	8.23	1.16	1.02	16.25	8.52	1.02	1.02	17.19	8.98	0.91	0.91	0.78	0.78	18.17	9.50	0.78	0.78	19.23	10.12	0.62
	67 (19.4)	14.14	10.11	1.17	1.04	14.83	10.44	1.04	1.04	15.69	10.99	0.94	0.94	0.82	0.82	16.60	11.63	0.82	0.82	17.57	12.43	0.67
	57 (13.9)	13.11	11.59	1.18	1.05	13.77	11.94	1.05	1.05	14.58	12.56	0.96	0.96	0.85	0.85	15.44	13.30	0.85	0.85	16.36	14.24	0.71
75 (23.9)	72 (22.2)	6.36	2.59	0.47	0.47	9.26	3.75	0.47	0.47	9.75	3.95	0.47	0.47	0.43	0.43	10.23	4.15	0.43	0.43	10.72	4.35	0.36
	67 (19.4)	10.72	6.18	0.76	0.48	8.39	4.68	0.48	0.48	8.84	4.89	0.49	0.49	0.47	0.47	9.27	5.09	0.47	0.47	9.70	5.30	0.40
	63 (17.2)	9.90	7.24	0.76	0.49	7.74	5.40	0.49	0.49	8.15	5.61	0.51	0.51	0.49	0.49	8.56	5.83	0.49	0.49	8.96	6.04	0.44
	57 (13.9)	8.82	8.81	0.77	0.49	6.85	6.46	0.49	0.49	7.22	6.68	0.52	0.52	0.52	0.52	7.59	6.90	0.52	0.52	7.95	7.12	0.48
	72 (22.2)	11.79	6.17	0.75	0.47	9.23	4.68	0.47	0.47	9.72	4.88	0.47	0.47	0.43	0.43	10.20	5.09	0.43	0.43	10.68	5.30	0.36
80 (26.7)	67 (19.4)	10.69	7.53	0.76	0.48	8.37	5.60	0.48	0.48	8.81	5.82	0.49	0.49	0.47	0.47	9.25	6.03	0.47	0.47	9.68	6.24	0.40
	63 (17.2)	9.88	8.60	0.76	0.49	7.72	6.32	0.49	0.49	8.14	6.54	0.51	0.51	0.49	0.49	8.54	6.76	0.49	0.49	8.95	6.98	0.44
	57 (13.9)	9.35	9.35	0.77	0.49	7.09	7.09	0.49	0.49	7.40	7.40	0.52	0.52	0.51	0.51	7.70	7.70	0.51	0.51	8.00	8.00	0.48
	72 (22.2)	3.18	1.29	0.24	0.47	8.99	3.64	0.47	0.47	9.59	3.89	0.48	0.48	0.44	0.44	9.99	4.06	0.44	0.44	10.66	4.33	0.36
	67 (19.4)	10.72	6.18	0.76	0.48	8.13	4.46	0.48	0.48	8.68	4.76	0.50	0.50	0.48	0.48	9.04	4.92	0.48	0.48	9.65	5.25	0.41
75 (23.9)	63 (17.2)	9.90	7.24	0.76	0.49	7.49	5.09	0.49	0.49	8.00	5.44	0.51	0.51	0.50	0.50	8.34	5.58	0.50	0.50	8.91	5.98	0.44
	57 (13.9)	8.82	8.81	0.77	0.49	6.63	6.02	0.49	0.49	7.09	6.43	0.52	0.52	0.52	0.52	7.39	6.56	0.52	0.52	7.90	7.04	0.48
	72 (22.2)	11.79	6.17	0.75	0.47	8.96	4.47	0.47	0.47	9.55	4.76	0.47	0.47	0.44	0.44	9.96	4.92	0.44	0.44	10.62	5.26	0.36
	67 (19.4)	10.69	7.53	0.76	0.48	8.11	5.28	0.48	0.48	8.66	5.63	0.50	0.50	0.48	0.48	9.02	5.78	0.48	0.48	9.63	6.18	0.41
	57 (13.9)	9.88	8.60	0.76	0.49	7.48	5.91	0.49	0.49	7.99	6.31	0.51	0.51	0.50	0.50	8.33	6.44	0.50	0.50	8.89	6.91	0.44
80 (26.7)	72 (22.2)	9.35	9.35	0.77	0.49	6.73	6.73	0.49	0.49	7.19	7.19	0.52	0.52	0.52	0.52	7.40	7.40	0.52	0.52	7.93	7.93	0.48

Operation in this area is restricted to maintain reliable system operation and customer comfort. The system will default to the next available stage

Stage 1 — Compressor speed limited to stage two at 105 outdoor.

See additional notes on page 28

TVA936
DETAILED COOLING CAPACITIES# - EFFICIENCY MODE CONTINUED

EDB °F (°C)	EVA ¹ AIR	TVA936 / FCM4x8*** Efficiency Mode Condenser Entering Air Temperature °F (°C)																							
		115 (46.1)				105 (40.5)				95 (35)				85 (29.4)				75 (23.9)				65 (18.3)			
		ID SCFM	Capacity MBtuh Total	Sens†	Total Sys. KW**	ID SCFM	Capacity MBtuh Total	Sens†	Total Sys. KW**	ID SCFM	Capacity MBtuh Total	Sens†	Total Sys. KW**	ID SCFM	Capacity MBtuh Total	Sens†	Total Sys. KW**	ID SCFM	Capacity MBtuh Total	Sens†	Total Sys. KW**	ID SCFM	Capacity MBtuh Total	Sens†	Total Sys. KW**
STAGE 5																									
75 (23.9)	72 (22.2)	34.24	14.18	4.44	36.41	14.99	3.89	38.29	15.70	3.36	40.30	16.47	2.87	42.28	17.24	2.41	44.18	17.98	1.98	46.07	18.74	1.50	47.91	19.49	1.04
	67 (19.4)	31.38	19.07	4.38	33.35	19.95	3.85	35.13	20.75	3.34	36.99	21.60	2.87	38.79	22.42	2.43	40.52	23.22	2.02	42.41	24.00	1.50	44.18	24.75	1.04
	63 (17.2)	29.21	22.90	4.33	31.07	23.84	3.81	32.74	24.70	3.31	34.48	25.59	2.86	36.17	26.47	2.44	37.79	27.32	2.04	39.57	28.14	1.50	41.23	28.87	1.04
	57 (13.9)	27.05	27.05	4.27	28.50	28.50	3.77	29.85	29.85	3.28	31.20	31.20	2.84	32.65	32.25	2.44	34.08	33.21	2.06	35.87	33.81	1.50	37.66	34.34	1.04
	72 (22.2)	34.04	18.92	4.44	36.21	19.79	3.88	38.09	20.56	3.35	40.10	21.39	2.86	42.08	22.22	2.41	43.98	23.01	1.98	45.87	23.74	1.50	47.74	24.47	1.04
80 (26.7)	67 (19.4)	31.25	23.78	4.38	33.23	24.72	3.84	35.00	25.57	3.33	36.86	26.47	2.86	38.66	27.35	2.42	40.39	28.21	2.02	42.28	28.14	1.50	44.18	28.87	1.04
	63 (17.2)	29.21	27.55	4.33	31.05	28.56	3.81	32.70	29.48	3.31	34.43	30.44	2.86	36.11	31.38	2.43	37.72	32.28	2.04	39.57	32.11	1.50	41.23	32.84	1.04
	57 (13.9)	28.61	28.61	4.32	30.14	30.14	3.80	31.53	31.53	3.30	32.95	32.95	2.85	34.31	34.31	2.44	35.64	35.64	2.05	37.49	35.17	1.50	39.66	35.80	1.04
	72 (22.2)	21.81	9.32	1.96	23.25	9.85	1.83	24.29	10.24	1.67	25.66	10.75	1.50	27.01	11.26	1.31	28.33	11.75	1.10	29.99	12.24	1.00	31.66	12.71	0.71
	67 (19.4)	19.85	13.12	1.96	21.18	13.71	1.84	22.21	14.19	1.68	23.48	14.77	1.52	24.72	15.33	1.35	25.94	15.89	1.15	27.62	16.37	1.00	29.99	16.84	0.71
75 (23.9)	63 (17.2)	18.41	16.08	1.95	19.66	16.73	1.85	20.68	17.29	1.68	21.87	17.91	1.54	23.02	18.53	1.37	24.16	19.14	1.19	25.82	19.67	1.00	28.33	20.14	0.71
	57 (13.9)	17.71	17.71	1.95	18.75	18.75	1.85	19.63	19.63	1.68	20.61	20.61	1.54	21.57	21.57	1.39	22.50	22.50	1.22	24.18	22.50	1.00	26.66	22.82	0.71
	72 (22.2)	21.64	13.06	1.95	23.07	13.65	1.83	24.08	14.08	1.66	25.46	14.65	1.49	26.81	15.21	1.31	28.13	15.76	1.10	30.01	16.37	1.00	32.84	16.84	0.71
	67 (19.4)	19.77	16.83	1.95	21.09	17.48	1.84	22.11	18.01	1.67	23.37	18.64	1.52	24.60	19.26	1.35	25.82	19.87	1.15	27.70	20.40	1.00	30.01	20.87	0.71
	63 (17.2)	18.86	18.86	1.95	19.95	19.95	1.84	20.82	20.82	1.68	21.94	21.67	1.53	23.07	22.38	1.37	24.19	23.06	1.19	26.16	23.69	1.00	28.33	24.14	0.71
80 (26.7)	57 (13.9)	18.83	18.83	1.95	19.91	19.91	1.84	20.79	20.79	1.68	21.82	21.82	1.53	22.82	22.82	1.37	23.80	23.80	1.20	26.01	23.31	1.00	28.13	23.80	0.71
	72 (22.2)	14.74	6.58	0.98	15.80	6.96	1.00	16.82	7.41	0.88	17.79	7.79	0.71	18.74	8.74	0.51	19.69	9.69	0.40	21.57	10.22	0.30	23.41	10.71	0.21
	67 (19.4)	13.36	9.71	0.98	14.34	10.16	1.02	15.37	10.63	0.91	16.34	11.13	0.71	17.31	11.60	0.51	18.26	12.56	0.38	20.14	12.09	0.30	22.22	12.58	0.21
	63 (17.2)	12.47	12.13	0.98	13.37	12.85	1.03	14.37	13.32	0.91	15.34	13.79	0.71	16.31	14.26	0.51	17.26	15.21	0.40	19.07	14.74	0.30	21.14	15.21	0.21
	57 (13.9)	12.37	12.37	0.98	13.18	13.18	1.03	14.18	13.18	0.91	15.18	14.18	0.71	16.18	15.18	0.51	17.18	16.18	0.40	19.07	16.18	0.30	21.14	16.18	0.21
75 (23.9)	72 (22.2)	14.58	9.69	0.97	15.63	10.12	1.00	16.67	10.67	0.88	17.66	11.16	0.71	18.66	11.66	0.51	19.66	12.66	0.38	22.50	13.16	0.30	24.41	13.66	0.21
	67 (19.4)	13.36	12.75	0.98	14.32	13.27	1.02	15.32	13.27	0.91	16.32	14.27	0.71	17.32	14.27	0.51	18.32	15.27	0.40	20.14	15.77	0.30	22.22	16.27	0.21
	63 (17.2)	13.20	13.20	0.98	14.04	14.04	1.02	15.04	14.04	0.91	16.04	14.04	0.71	17.04	14.04	0.51	18.04	15.04	0.40	19.07	15.04	0.30	21.14	15.04	0.21
	57 (13.9)	13.18	13.18	0.98	14.02	14.02	1.02	15.02	14.02	0.91	16.02	14.02	0.71	17.02	14.02	0.51	18.02	15.02	0.40	19.07	15.02	0.30	21.14	15.02	0.21
	72 (22.2)	14.74	6.58	0.98	15.80	6.96	1.00	16.82	7.41	0.88	17.79	7.79	0.71	18.74	8.74	0.51	19.69	9.69	0.40	21.57	10.22	0.30	23.41	10.71	0.21

Operation in this area is restricted to maintain reliable system operation and customer comfort. The system will default to the next available stage
Stage 1 — Compressor speed limited to stage two at 105 and 115 outdoor.

See additional notes on page 28

TVA936
DETAILED COOLING CAPACITIES# - COMFORT + DEHUMIDIFY MODE CONTINUED

EDB °F (°C)	EVAP AIR WB/GP °F (°C)	TVA936 / FCMX48***L Comfort + Dehumidify Mode Condenser Entering Air Temperature °F (°C)																			
		105 (40.5)					95 (35)					75 (23.9)					65 (18.3)				
		ID SCFM	Capacity Total	MBtuh Sensit	Total Sys. KW	Capacity Total	MBtuh Sensit	Total Sys. KW	ID SCFM	Capacity Total	MBtuh Sensit	Total Sys. KW	Capacity Total	MBtuh Sensit	Total Sys. KW	ID SCFM	Capacity Total	MBtuh Sensit	Total Sys. KW	Capacity Total	MBtuh Sensit
75 (23.9)	72 (22.2)	812	35.03	14.21	3.80	36.79	14.91	3.28	38.97	15.79	2.81	41.14	16.67	2.38	948	43.43	17.61	1.97	43.43	17.61	1.97
	67 (19.4)	812	32.03	18.10	3.76	33.69	18.87	3.26	35.70	19.98	2.81	37.69	21.10	2.39	948	39.83	22.39	2.00	39.83	22.39	2.00
	63 (17.2)	812	29.78	21.12	3.72	31.34	21.94	3.23	33.23	23.22	2.80	35.10	24.53	2.40	948	37.11	26.09	2.02	37.11	26.09	2.02
	57 (13.9)	812	26.68	25.51	3.66	28.08	26.39	3.19	29.78	27.92	2.78	31.49	29.50	2.40	948	33.35	31.47	2.04	33.35	31.47	2.04
	72 (22.2)	812	34.90	17.98	3.79	36.65	18.72	3.28	38.82	19.81	2.81	40.98	20.92	2.37	948	43.26	22.19	1.97	43.26	22.19	1.97
80 (26.7)	67 (19.4)	812	31.95	21.83	3.75	33.60	22.64	3.25	35.61	23.95	2.81	37.60	25.30	2.39	948	39.72	26.91	2.00	39.72	26.91	2.00
	63 (17.2)	812	29.73	24.84	3.72	31.29	25.70	3.23	33.16	27.18	2.80	35.04	28.72	2.39	948	37.04	30.61	2.02	37.04	30.61	2.02
	57 (13.9)	812	27.71	27.71	3.68	28.95	28.95	3.20	30.66	30.66	2.78	32.41	32.41	2.40	948	34.42	34.42	2.04	34.42	34.42	2.04
	72 (22.2)	566	21.74	8.83	1.80	22.72	9.22	1.63	24.20	9.82	1.47	25.61	10.39	1.30	664	27.10	11.00	1.09	27.10	11.00	1.09
	67 (19.4)	566	19.76	11.28	1.80	20.72	11.74	1.64	22.09	12.54	1.49	23.39	13.27	1.33	664	24.77	14.10	1.14	24.77	14.10	1.14
75 (23.9)	63 (17.2)	566	18.28	13.20	1.80	19.22	13.70	1.63	20.51	14.65	1.50	21.73	15.51	1.35	664	23.02	16.51	1.18	23.02	16.51	1.18
	57 (13.9)	566	16.37	16.02	1.79	17.25	16.59	1.63	18.42	17.76	1.51	19.53	18.80	1.37	664	20.72	20.04	1.21	20.72	20.04	1.21
	72 (22.2)	566	21.65	11.25	1.80	22.62	11.67	1.63	24.08	12.45	1.47	25.49	13.17	1.29	664	26.96	13.99	1.09	26.96	13.99	1.09
	67 (19.4)	566	19.70	13.69	1.80	20.66	14.18	1.63	22.03	15.15	1.49	23.32	16.03	1.33	664	24.69	17.07	1.14	24.69	17.07	1.14
	63 (17.2)	566	18.26	15.60	1.80	19.20	16.13	1.63	20.48	17.26	1.50	21.70	18.27	1.35	664	22.99	19.47	1.17	22.99	19.47	1.17
80 (26.7)	72 (22.2)	417	14.50	5.90	0.99	9.48	3.84	0.49	10.07	4.08	0.49	10.66	4.32	0.45	267	11.47	4.65	0.35	11.47	4.65	0.35
	67 (19.4)	417	13.17	7.58	1.00	8.59	4.79	0.50	9.13	5.04	0.52	9.66	5.30	0.49	267	10.39	5.71	0.41	10.39	5.71	0.41
	63 (17.2)	417	12.18	8.91	1.00	7.92	5.53	0.51	8.42	5.80	0.53	8.92	6.07	0.51	267	9.60	6.55	0.45	9.60	6.55	0.45
	57 (13.9)	417	10.89	10.84	1.01	7.02	6.61	0.52	7.46	6.90	0.55	7.91	7.19	0.54	267	8.52	7.77	0.49	8.52	7.77	0.49
	72 (22.2)	417	14.44	7.57	0.99	9.44	4.79	0.49	10.03	5.04	0.49	10.62	5.30	0.45	267	11.43	5.71	0.35	11.43	5.71	0.35
75 (23.9)	67 (19.4)	236	13.13	9.25	1.00	8.56	5.73	0.50	9.10	6.01	0.52	9.64	6.28	0.49	246	10.36	6.78	0.41	10.36	6.78	0.41
	63 (17.2)	236	12.16	10.56	1.00	7.91	6.47	0.51	8.41	6.76	0.53	8.91	7.05	0.51	246	9.58	7.61	0.45	9.58	7.61	0.45
	57 (13.9)	236	11.52	11.52	1.01	7.26	7.26	0.52	7.64	7.64	0.54	8.03	8.03	0.54	246	8.66	8.66	0.48	8.66	8.66	0.48
	72 (22.2)	236	14.50	5.90	0.99	9.35	3.79	0.49	9.88	4.01	0.50	10.62	4.30	0.45	246	11.47	4.65	0.35	11.47	4.65	0.35
	67 (19.4)	236	13.17	7.58	1.00	8.46	4.68	0.50	8.94	4.90	0.52	9.62	5.27	0.49	246	10.39	5.71	0.41	10.39	5.71	0.41
80 (26.7)	63 (17.2)	236	12.18	8.91	1.00	7.80	5.37	0.51	8.25	5.59	0.53	8.88	6.02	0.51	246	9.60	6.55	0.45	9.60	6.55	0.45
	57 (13.9)	236	10.89	10.84	1.01	6.91	6.39	0.52	7.30	6.60	0.55	7.87	7.12	0.54	246	8.52	7.77	0.49	8.52	7.77	0.49
	72 (22.2)	236	14.44	7.57	0.99	9.31	4.68	0.49	9.84	4.90	0.50	10.58	5.27	0.45	246	11.43	5.71	0.35	11.43	5.71	0.35
	67 (19.4)	236	13.13	9.25	1.00	8.44	5.57	0.50	8.92	5.79	0.52	9.60	6.23	0.49	246	10.36	6.78	0.41	10.36	6.78	0.41
	63 (17.2)	236	12.16	10.56	1.00	7.79	6.26	0.51	8.23	6.48	0.53	8.87	6.98	0.51	246	9.58	7.61	0.45	9.58	7.61	0.45
80 (26.7)	57 (13.9)	236	11.52	11.52	1.01	7.08	7.08	0.52	7.39	7.39	0.55	7.97	7.97	0.54	246	8.66	8.66	0.48	8.66	8.66	0.48

Operation in this area is restricted to maintain reliable system operation and customer comfort. The system will default to the next available stage
Stage 1 — Compressor speed limited to stage two at 105 outdoor.

See additional notes on page 28

TVA937
DETAILED COOLING CAPACITIES# – EFFICIENCY MODE CONTINUED

EDB F (°C)	EVAAP. AIR F (°C)	TVA937 / FCM4X60***L Efficiency Mode Condenser Entering Air Temperature °F (°C)																			
		115 (46.1)			105 (40.5)			95 (35)			85 (29.4)			75 (23.9)			65 (18.3)				
		ID SCFM	Capacity MBtuh Total	Total Sys. KW**	ID SCFM	Capacity MBtuh Total	Total Sys. KW**	ID SCFM	Capacity MBtuh Total	Total Sys. KW**	ID SCFM	Capacity MBtuh Total	Total Sys. KW**	ID SCFM	Capacity MBtuh Total	Total Sys. KW**	ID SCFM	Capacity MBtuh Total	Total Sys. KW**		
75 (23.9)	72 (22.2)	1050	32.70	13.63	3.49	1050	34.98	14.48	3.05	1050	37.03	15.26	2.59	1050	39.26	16.11	2.21	1050	41.44	16.95	1.86
	67 (19.4)	1050	31.53	19.22	3.08	1050	31.81	19.44	3.03	1050	33.70	20.30	2.58	1050	35.71	21.22	2.21	1050	37.69	22.14	1.87
	63 (17.2)	1050	27.56	22.33	3.44	1050	29.46	23.92	3.02	1050	31.25	24.26	2.58	1050	33.12	25.24	2.21	1050	34.94	26.21	1.88
	57 (13.9)	1050	25.78	25.78	3.41	1050	27.31	27.31	3.00	1050	28.73	28.73	2.56	1050	30.19	30.19	2.21	1050	31.62	31.62	1.89
	72 (22.2)	1050	32.58	18.47	3.49	1050	34.86	19.41	3.05	1050	36.91	20.26	2.59	1050	39.14	21.19	2.21	1050	41.32	22.11	1.86
80 (26.7)	67 (19.4)	1050	31.43	24.01	3.08	1050	31.71	24.30	3.03	1050	33.60	25.24	2.58	1050	35.61	26.24	2.21	1050	37.59	27.23	1.87
	63 (17.2)	1050	27.61	27.02	3.44	1050	29.49	28.13	3.02	1050	31.23	29.15	2.58	1050	33.10	30.22	2.21	1050	34.91	31.27	1.88
	57 (13.9)	1050	27.36	27.36	3.44	1050	28.98	28.98	3.01	1050	30.45	30.45	2.57	1050	32.00	32.00	2.21	1050	33.49	33.49	1.89
	72 (22.2)	900	22.96	9.72	2.41	900	24.70	10.37	2.11	900	26.36	10.99	1.76	900	28.08	11.65	1.50	900	29.77	12.29	1.25
	67 (19.4)	900	20.81	13.49	2.42	900	22.39	14.22	2.13	900	23.90	14.93	1.79	900	25.43	15.65	1.54	900	26.95	16.37	1.30
80 (26.7)	63 (17.2)	900	19.24	16.44	2.42	900	20.68	17.23	2.14	900	22.09	18.01	1.80	900	23.50	18.79	1.56	900	24.89	19.57	1.34
	57 (13.9)	900	18.34	18.34	2.42	900	19.54	19.54	2.15	900	20.70	20.70	1.82	900	21.85	21.85	1.58	900	22.98	22.98	1.37
	72 (22.2)	900	22.86	13.49	2.41	900	24.60	14.23	2.11	900	26.26	14.93	1.76	900	27.98	15.67	1.50	900	29.67	16.39	1.25
	67 (19.4)	900	20.74	17.22	2.42	900	22.31	18.03	2.13	900	23.83	18.82	1.79	900	25.36	19.62	1.54	900	26.87	20.42	1.30
	57 (17.2)	900	19.57	19.57	2.42	900	20.83	20.83	2.14	900	22.16	21.83	1.80	900	23.54	22.72	1.56	900	24.92	23.58	1.33
75 (23.9)	72 (22.2)	800	18.16	7.73	1.96	800	19.62	8.28	1.73	800	21.04	8.82	1.50	800	22.51	9.37	1.25	800	24.02	10.00	1.03
	67 (19.4)	800	16.42	10.82	1.98	800	17.74	11.45	1.76	800	19.16	12.08	1.50	800	20.63	12.71	1.25	800	22.14	13.34	1.03
	63 (17.2)	800	15.19	13.25	1.99	800	16.40	13.94	1.77	800	17.81	14.57	1.50	800	19.22	15.20	1.25	800	20.69	15.83	1.03
	57 (13.9)	800	14.59	14.59	1.99	800	15.61	15.61	1.78	800	16.82	16.24	1.50	800	18.03	16.86	1.25	800	19.24	17.47	1.03
	72 (22.2)	800	18.08	10.84	1.96	800	19.54	11.47	1.73	800	21.06	12.10	1.50	800	22.57	12.73	1.25	800	24.08	13.36	1.03
80 (26.7)	67 (19.4)	800	16.38	13.89	1.98	800	17.69	14.60	1.75	800	19.11	15.31	1.50	800	20.62	16.02	1.25	800	22.13	16.65	1.03
	63 (17.2)	800	15.57	15.57	1.99	800	16.66	16.66	1.77	800	17.87	17.39	1.50	800	19.28	18.10	1.25	800	20.69	18.71	1.03
	57 (13.9)	800	15.54	15.54	1.99	800	16.63	16.63	1.77	800	17.84	17.36	1.50	800	19.25	18.07	1.25	800	20.66	18.68	1.03
	72 (22.2)	600	17.28	7.14	0.57	600	18.39	7.78	0.57	600	19.50	8.31	0.57	600	20.61	8.84	0.57	600	21.72	9.37	0.57
	67 (19.4)	600	15.65	9.54	0.62	600	16.65	10.17	0.62	600	17.76	10.80	0.62	600	18.97	11.43	0.62	600	20.08	12.06	0.62

Operation in this area is restricted to maintain reliable system operation and customer comfort. The system will default to the next available stage
Stage 1 – Compressor speed limited to stage two at 105 and 115 outdoor.

See additional notes on page 28

TVA937
DETAILED COOLING CAPACITIES# - COMFORT + DEHUMIDIFY MODE CONTINUED

EDB °F (°C)	EVAP. AIR		105 (40.5)				95 (35)				85 (29.4)				75 (23.9)				65 (18.3)			
	EWB °F (°C)	ID SCFM	Capacity MBtuh		Total Sys. KW	ID SCFM	Capacity MBtuh		Total Sys. KW	ID SCFM	Capacity MBtuh		Total Sys. KW	ID SCFM	Capacity MBtuh		Total Sys. KW	ID SCFM	Capacity MBtuh		Total Sys. KW	
			Total	Sensit			Total	Sensit			Total	Sensit			Total	Sensit			Total	Sensit		Total
75 (23.9)	72 (22.2)	812	33.61	13.66	2.96	812	35.51	14.41	2.51	848	37.87	15.36	2.15	888	40.27	16.34	1.81	948	42.86	17.40	1.51	
	67 (19.4)		30.54	17.52	2.94		32.28	18.33	2.50		34.42	19.52	2.15		36.60	20.75	1.83		38.94	22.16	1.53	
	63 (17.2)		28.29	20.54	2.93		29.92	21.40	2.49		31.90	22.77	2.15		33.91	24.19	1.84		36.07	25.89	1.55	
	57 (13.9)		25.29	24.94	2.90		26.74	25.90	2.47		28.50	27.52	2.15		30.29	29.23	1.85		32.24	31.32	1.58	
	72 (22.2)		33.51	17.49	2.96		35.42	18.30	2.51		37.77	19.49	2.15		40.17	20.72	1.81		42.74	22.14	1.51	
80 (26.7)	67 (19.4)	812	30.47	21.31	2.94	812	32.21	22.18	2.50	848	34.35	23.59	2.15	888	36.52	25.07	1.83	948	38.86	26.84	1.53	
	63 (17.2)		28.24	24.31	2.93		29.87	25.23	2.49		31.85	26.83	2.15		33.86	28.50	1.84		36.02	30.55	1.55	
	57 (13.9)		26.63	26.63	2.91		27.94	27.94	2.48		29.75	29.75	2.15		31.61	31.61	1.84		33.74	33.74	1.57	
	72 (22.2)		22.84	9.26	2.06		24.29	9.84	1.72		26.09	10.57	1.47		27.82	11.27	1.23		29.72	12.04	1.01	
	67 (19.4)		20.67	11.68	2.07		21.98	12.30	1.74		23.60	13.23	1.50		25.16	14.10	1.28		26.87	15.10	1.07	
75 (23.9)	63 (17.2)	566	19.09	13.58	2.08	566	20.29	14.24	1.75	600	21.79	15.33	1.52	625	23.23	16.32	1.31	665	24.80	17.51	1.11	
	57 (13.9)		17.03	16.40	2.08		18.10	17.12	1.77		19.44	18.43	1.55		20.71	19.61	1.34		22.12	21.08	1.15	
	72 (22.2)		22.78	11.70	2.06		24.23	12.32	1.72		26.03	13.26	1.47		27.76	14.13	1.23		29.64	15.14	1.01	
	67 (19.4)		20.62	14.10	2.07		21.93	14.77	1.74		23.55	15.90	1.50		25.10	16.93	1.28		26.81	18.18	1.07	
	63 (17.2)		19.06	15.99	2.08		20.27	16.70	1.75		21.76	17.98	1.52		23.20	19.14	1.31		24.77	20.57	1.11	
57 (13.9)	17.76	17.76	2.08	18.73	18.73	1.76	20.14	20.14	1.54	21.44	21.44	1.33	22.97	22.97	1.14							
75 (23.9)	72 (22.2)	500	18.14	7.36	1.70	500	14.63	6.00	0.87	500	15.69	6.41	0.72	500	16.75	6.83	0.57	500	17.81	7.24	0.44	
	67 (19.4)		16.41	9.34	1.72		13.27	7.90	0.91		14.22	8.36	0.76		15.17	8.83	0.63		16.11	9.29	0.50	
	63 (17.2)		15.16	10.91	1.74		12.27	9.39	0.93		13.14	9.90	0.80		14.01	10.41	0.66		14.88	10.91	0.54	
	57 (13.9)		13.54	13.23	1.75		11.20	11.20	0.96		11.91	11.91	0.83		12.61	12.61	0.71		13.31	13.30	0.59	
	72 (22.2)		18.09	9.36	1.70		14.58	7.89	0.87		15.64	8.36	0.72		16.70	8.83	0.57		17.75	9.31	0.44	
80 (26.7)	67 (19.4)	500	16.37	11.32	1.72	500	13.23	9.78	0.91	500	14.18	10.30	0.76	500	15.12	10.82	0.63	500	16.07	11.34	0.50	
	63 (17.2)		15.14	12.88	1.74		12.26	11.27	0.93		13.13	11.83	0.80		14.00	12.39	0.66		14.87	12.96	0.54	
	57 (13.9)		14.21	14.21	1.74		11.88	11.88	0.94		12.62	12.62	0.81		13.36	13.36	0.68		14.09	14.09	0.57	
	72 (22.2)		17.38	7.04	1.70		12.07	4.96	0.92		12.74	5.27	0.79		13.77	5.69	0.66		14.98	6.17	0.52	
	67 (19.4)		15.72	8.68	1.72		10.91	5.83	0.95		11.51	6.14	0.83		12.45	6.65	0.70		13.53	7.24	0.57	
75 (23.9)	63 (17.2)	417	14.53	9.98	1.73	236	10.07	6.52	0.97	232	10.63	6.83	0.85	246	11.49	7.40	0.73	267	12.49	8.08	0.61	
	57 (13.9)		12.94	11.91	1.74		8.96	7.52	0.98		9.45	7.84	0.87		10.21	8.50	0.76		11.10	9.31	0.65	
	72 (22.2)		17.34	8.70	1.70		12.04	5.86	0.92		12.71	6.17	0.79		13.75	6.68	0.66		14.95	7.27	0.52	
	67 (19.4)		15.69	10.34	1.72		10.89	6.72	0.95		11.49	7.05	0.83		12.43	7.63	0.70		13.51	8.33	0.57	
	63 (17.2)		14.50	11.63	1.73		10.05	7.40	0.97		10.61	7.73	0.85		11.47	8.38	0.73		12.47	9.17	0.61	
57 (13.9)	13.22	13.22	1.74	8.95	8.40	0.98	9.44	8.73	0.87	10.21	9.47	0.76	11.09	10.40	0.65							

Operation in this area is restricted to maintain reliable system operation and customer comfort. The system will default to the next available stage

Stage 1 - Compressor speed limited to stage two at 105 outdoor.

See additional notes on page 28

TVA948
DETAILED COOLING CAPACITIES# – EFFICIENCY MODE CONTINUED

EDB °F (°C)	EVAR AIR °F (°C)	TVA948 / FCMAx60***L Efficiency Mode Condenser Entering Air Temperature °F (°C)																							
		115 (46.1)				105 (40.5)				95 (35)				85 (29.4)				75 (23.9)				65 (18.3)			
		ID SCF M	Capacity MBtuh Total Sens †	Total Sys. KW**	Total Sys. KW**	ID SCF M	Capacity MBtuh Total Sens †	Total Sys. KW**	Total Sys. KW**	ID SCF M	Capacity MBtuh Total Sens †	Total Sys. KW**	Total Sys. KW**	ID SCF M	Capacity MBtuh Total Sens †	Total Sys. KW**	Total Sys. KW**	ID SCF M	Capacity MBtuh Total Sens †	Total Sys. KW**	Total Sys. KW**				
75 (23.9)	72 (22.2)	44.82	18.57	5.52	4.88	47.96	19.76	4.88	4.29	50.99	20.91	4.29	3.74	53.98	22.06	3.74	3.23	56.89	23.19	3.23	59.70	24.29	2.75		
	67 (19.4)	40.99	24.95	5.42	4.80	43.86	26.26	4.80	4.23	46.65	27.54	4.23	3.70	49.36	28.80	3.70	3.21	52.01	30.04	3.21	54.60	31.27	2.75		
	63 (17.2)	38.13	29.97	5.34	4.74	40.79	31.36	4.74	4.18	43.37	32.72	4.18	3.67	45.91	34.07	3.67	3.19	48.37	35.40	3.19	50.78	36.72	2.74		
	57 (13.9)	35.29	35.29	5.26	4.66	37.41	37.41	4.66	4.12	39.46	39.46	4.12	3.62	41.45	41.45	3.62	3.16	43.58	43.09	3.16	45.70	44.59	2.73		
	72 (22.2)	44.80	24.79	5.51	4.88	47.74	26.09	4.88	4.28	50.77	27.36	4.28	3.73	53.76	28.62	3.73	3.22	56.66	29.86	3.22	59.48	31.07	2.75		
80 (26.7)	67 (19.4)	40.84	31.14	5.42	4.80	43.71	32.55	4.80	4.23	46.50	33.94	4.23	3.70	49.21	35.31	3.70	3.20	51.86	36.65	3.20	54.45	37.98	2.75		
	63 (17.2)	38.13	36.06	5.34	4.74	40.76	37.59	4.74	4.18	43.33	39.07	4.18	3.67	45.84	40.54	3.67	3.18	48.30	41.98	3.18	50.70	43.40	2.74		
	57 (13.9)	37.36	37.36	5.32	4.72	39.59	39.59	4.72	4.16	41.72	41.72	4.16	3.64	43.81	43.81	3.64	3.17	45.84	45.84	3.17	47.82	47.82	2.73		
	72 (22.2)	29.42	12.62	2.82	2.56	31.60	13.43	2.56	2.26	33.63	14.20	2.26	2.00	35.75	15.00	2.00	1.74	37.82	15.78	1.74	39.85	16.55	1.49		
	67 (19.4)	26.82	17.86	2.80	2.56	28.83	18.79	2.56	2.27	30.73	19.68	2.27	2.02	32.66	20.60	2.02	1.77	34.57	21.50	1.77	36.44	22.40	1.52		
75 (23.9)	63 (17.2)	24.93	21.96	2.79	2.55	26.79	22.99	2.55	2.26	28.58	23.99	2.26	2.02	30.39	25.00	2.02	1.78	32.16	26.00	1.78	33.91	26.99	1.55		
	57 (13.9)	24.03	24.03	2.78	2.55	25.61	25.61	2.55	2.26	27.12	27.12	2.26	2.03	28.62	28.62	2.03	1.80	30.11	30.11	1.80	31.55	31.55	1.57		
	72 (22.2)	29.22	17.78	2.81	2.55	31.39	18.70	2.55	2.25	33.41	19.57	2.25	2.00	35.52	20.47	2.00	1.74	37.60	21.37	1.74	39.62	22.25	1.48		
	67 (19.4)	26.71	22.96	2.80	2.56	28.71	24.01	2.56	2.26	30.60	25.01	2.26	2.01	32.52	26.03	2.01	1.77	34.42	27.05	1.77	36.30	28.05	1.52		
	63 (17.2)	25.56	25.56	2.80	2.55	27.23	27.23	2.55	2.26	28.80	28.80	2.26	2.02	30.48	30.24	2.02	1.78	32.21	31.42	1.78	33.93	32.55	1.55		
80 (26.7)	57 (13.9)	25.52	25.52	2.80	2.55	27.19	27.19	2.55	2.26	28.76	28.76	2.26	2.02	30.35	30.35	2.02	1.78	31.90	31.90	1.78	33.43	33.43	1.55		
	72 (22.2)	25.50	10.99	2.21	2.07	27.46	11.73	2.07	0.95	19.62	8.56	0.95	0.84	20.96	9.06	0.84	0.72	22.29	9.57	0.72	23.61	10.07	0.57		
	67 (19.4)	23.22	15.65	2.21	2.08	25.04	16.51	2.08	0.98	17.88	12.38	0.98	0.88	19.11	12.99	0.88	0.76	20.32	13.60	0.76	21.53	14.21	0.62		
	63 (17.2)	21.57	19.30	2.21	2.08	23.24	20.26	2.08	1.00	16.68	15.37	1.00	0.90	17.82	16.07	0.90	0.79	18.95	16.77	0.79	20.07	17.46	0.66		
	57 (13.9)	20.89	20.89	2.20	2.08	22.32	22.32	2.08	1.00	16.33	16.33	1.00	0.91	17.34	17.34	0.91	0.81	18.34	18.34	0.81	19.33	19.33	0.68		
80 (26.7)	72 (22.2)	25.31	15.59	2.21	2.06	27.26	16.44	2.06	0.95	19.42	12.31	0.95	0.84	20.76	12.92	0.84	0.71	22.09	13.52	0.71	23.43	14.14	0.57		
	67 (19.4)	23.13	20.20	2.21	2.07	24.93	21.18	2.07	0.98	17.82	16.09	0.98	0.88	19.04	16.80	0.88	0.76	20.25	17.51	0.76	21.44	18.21	0.62		
	63 (17.2)	22.25	22.25	2.21	2.08	23.77	23.77	2.08	0.98	17.35	17.35	0.98	0.89	18.41	18.41	0.89	0.78	19.46	19.46	0.78	20.50	20.50	0.65		
	57 (13.9)	22.21	22.21	2.21	2.08	23.73	23.73	2.08	0.98	17.32	17.32	0.98	0.89	18.39	18.39	0.89	0.78	19.43	19.43	0.78	20.47	20.47	0.65		
	72 (22.2)	25.50	10.99	2.21	2.07	27.46	11.73	2.07	0.95	19.62	8.56	0.95	0.84	20.96	9.06	0.84	0.72	22.29	9.57	0.72	23.61	10.07	0.57		

Operation in this area is restricted to maintain reliable system operation and customer comfort. The system will default to the next available stage
Stage 1 – Compressor speed limited to stage two at 105 and 115 outdoor.

See additional notes on page 28

TVA948 / FCIM4X60*L Comfort + Dehumidify Mode**
DETAILED COOLING CAPACITIES# - COMFORT + DEHUMIDIFY MODE CONTINUED

EDB °F (°C)	EVAR AIR °F (°C)	105 (40.5)										95 (35)										85 (29.4)										75 (23.9)										65 (18.3)									
		Capacity MBtuh		Total Sys. KW		ID SCFM	Capacity MBtuh		Total Sys. KW		ID SCFM	Capacity MBtuh		Total Sys. KW		ID SCFM	Capacity MBtuh		Total Sys. KW		ID SCFM	Capacity MBtuh		Total Sys. KW		ID SCFM	Capacity MBtuh		Total Sys. KW		ID SCFM	Capacity MBtuh		Total Sys. KW																	
		Total	Sens†	Total Sys. KW	Total		Sens†	Total Sys. KW	Total	Sens†		Total Sys. KW	Total	Sens†	Total Sys. KW		Total	Sens†	Total Sys. KW	Total		Sens†	Total Sys. KW	Total	Sens†		Total Sys. KW	Total	Sens†	Total Sys. KW		Total	Sens†	Total Sys. KW	Total	Sens†	Total Sys. KW														
75 (23.9)	72 (22.2)	46.42	18.85	4.71	1110	49.80	20.23	4.17	1247	53.09	21.57	3.65	1330	56.46	22.96	3.19	1226	58.44	23.68	2.67	1226	56.46	22.96	3.19	1330	53.09	21.57	3.65	1247	49.80	20.23	4.17	1110	46.42	18.85	4.71															
	67 (19.4)	42.40	24.08	4.63		45.50	25.89	4.11		48.51	27.62	3.61		48.51	27.62	3.61		51.61	29.50	3.17		51.61	29.50	3.17																											
	63 (17.2)	39.38	28.15	4.57		42.27	30.30	4.06		45.08	32.33	3.58		45.08	32.33	3.58		47.99	34.60	3.15		47.99	34.60	3.15																											
	57 (13.9)	35.31	34.09	4.47		37.94	36.72	3.98		40.49	39.19	3.53		40.49	39.19	3.53		43.14	41.99	3.12		43.14	41.99	3.12																											
	72 (22.2)	46.26	23.95	4.71		49.62	25.75	4.16		52.90	27.46	3.85		52.90	27.46	3.85		56.25	29.32	3.19		56.25	29.32	3.19																											
80 (26.7)	67 (19.4)	42.29	29.13	4.63	1110	45.38	31.35	4.10	1247	48.38	33.45	3.61	1330	51.47	35.79	3.17	1226	53.26	35.77	2.67	1226	51.47	35.79	3.17	1330	48.38	33.45	3.61	1247	45.38	31.35	4.10	1110	42.29	29.13	4.63															
	63 (17.2)	39.31	33.18	4.57		42.20	35.74	4.06		45.01	38.14	3.58		45.01	38.14	3.58		47.91	40.87	3.15		47.91	40.87	3.15																											
	57 (13.9)	36.80	36.80	4.51		39.58	39.58	4.01		42.24	42.24	3.55		42.24	42.24	3.55		45.10	45.10	3.13		45.10	45.10	3.13																											
	72 (22.2)	29.62	12.03	2.44		31.87	12.96	2.16		34.08	13.86	1.91		34.08	13.86	1.91		36.31	14.77	1.66		36.31	14.77	1.66																											
	67 (19.4)	26.97	15.41	2.44		29.06	16.68	2.16		31.09	17.85	1.92		31.09	17.85	1.92		33.14	19.06	1.68		33.14	19.06	1.68																											
75 (23.9)	63 (17.2)	24.98	18.04	2.43	744	26.95	19.58	2.15	801	28.84	20.96	1.92	887	30.75	22.40	1.70	1001	33.06	24.69	1.49	1001	30.75	22.40	1.70	887	28.84	20.96	1.92	801	24.98	18.04	2.43																			
	57 (13.9)	22.33	21.88	2.41		24.13	23.80	2.14		25.84	25.48	1.92		25.84	25.48	1.92		27.58	27.24	1.71		27.58	27.24	1.71																											
	72 (22.2)	29.51	15.95	2.44		31.74	16.60	2.15		33.93	17.76	1.91		33.93	17.76	1.91		36.15	18.96	1.66		36.15	18.96	1.66																											
	67 (19.4)	26.90	18.70	2.44		28.98	20.29	2.15		31.00	21.72	1.92		31.00	21.72	1.92		33.04	23.21	1.68		33.04	23.21	1.68																											
	57 (13.9)	34.45	25.97	4.20		26.90	23.17	2.15		28.79	24.81	1.92		28.79	24.81	1.92		30.70	26.53	1.70		30.70	26.53	1.70																											
75 (23.9)	72 (22.2)	25.60	10.40	1.99	662	18.27	7.44	0.93	500	19.44	7.91	0.83	508	20.67	8.39	0.71	534	22.04	8.96	0.56	534	20.67	8.39	0.71	508	19.44	7.91	0.83	500	18.27	7.44	0.93																			
	67 (19.4)	23.27	13.31	1.99		16.64	9.65	0.95		17.72	10.17	0.86		17.72	10.17	0.86		18.84	10.76	0.75		18.84	10.76	0.75																											
	63 (17.2)	21.53	15.58	1.99		15.45	11.39	0.97		16.45	11.96	0.88		16.45	11.96	0.88		17.49	12.62	0.77		17.49	12.62	0.77																											
	57 (13.9)	19.26	18.92	1.98		13.90	13.90	0.98		14.76	14.58	0.90		14.76	14.58	0.90		15.69	15.35	0.81		15.69	15.35	0.81																											
	72 (22.2)	25.60	10.40	1.99		18.26	7.44	0.93		19.44	7.91	0.83		19.44	7.91	0.83		20.67	8.39	0.71		20.67	8.39	0.71																											
80 (26.7)	67 (19.4)	23.27	13.31	1.99	662	16.64	9.65	0.95	500	17.72	10.17	0.86	508	18.84	10.76	0.75	534	20.11	11.51	0.61	534	18.84	10.76	0.75	508	17.72	10.17	0.86	500	16.64	9.65	0.95																			
	63 (17.2)	21.53	15.58	1.99		15.45	11.39	0.97		16.45	11.96	0.88		16.45	11.96	0.88		17.49	12.62	0.77		17.49	12.62	0.77																											
	57 (13.9)	19.26	18.92	1.98		13.90	13.90	0.98		14.76	14.58	0.90		14.76	14.58	0.90		15.69	15.35	0.81		15.69	15.35	0.81																											
	72 (22.2)	25.60	10.40	1.99		18.26	7.44	0.93		19.44	7.91	0.83		19.44	7.91	0.83		20.67	8.39	0.71		20.67	8.39	0.71																											
	67 (19.4)	23.27	13.31	1.99		16.64	9.65	0.95		17.72	10.17	0.86		17.72	10.17	0.86		18.84	10.76	0.75		18.84	10.76	0.75																											
75 (23.9)	63 (17.2)	21.53	15.58	1.99	662	15.45	11.39	0.97	457	16.45	11.96	0.88	482	17.49	12.62	0.77	508	18.68	13.53	0.65	508	17.49	12.62	0.77	482	16.45	11.96	0.88	457	15.45	11.39	0.97																			
	57 (13.9)	19.26	18.92	1.98		13.90	13.90	0.98		14.76	14.58	0.90		14.76	14.58	0.90		15.69	15.35	0.81		15.69	15.35	0.81																											
	72 (22.2)	25.60	10.40	1.99		18.26	7.44	0.93		19.44	7.91	0.83		19.44	7.91	0.83		20.67	8.39	0.71		20.67	8.39	0.71																											
	67 (19.4)	23.27	13.31	1.99		16.64	9.65	0.95		17.72	10.17	0.86		17.72	10.17	0.86		18.84	10.76	0.75		18.84	10.76	0.75																											
	57 (13.9)	19.26	18.92	1.98		13.90	13.90	0.98		14.76	14.58	0.90		14.76	14.58	0.90		15.69	15.35	0.81		15.69	15.35	0.81																											
80 (26.7)	72 (22.2)	25.60	10.40	1.99	662	17.95	7.29	0.93	457	19.30	7.84	0.83	482	20.67	8.39	0.71	508	22.04	8.96	0.56	508	20.67	8.39	0.71	482	19.30	7.84	0.83	457	17.95	7.29	0.93																			
	67 (19.4)	23.27	13.31	1.99		16.36	9.31	0.95		17.59	10.02	0.86		17.59	10.02	0.86		18.84	10.76	0.75		18.84	10.76	0.75																											
	63 (17.2)	21.53	15.58	1.99		15.18	10.89	0.97		16.33	11.74	0.88		16.33	11.74	0.88		17.49	12.62	0.77		17.49	12.62	0.77																											
	57 (13.9)	19.26	18.92	1.98		13.59	13.23	0.98		14.63	14.27	0.90		14.63	14.27	0.90		15.69	15.35	0.81		15.69	15.35	0.81																											
	72 (22.2)	25.60	10.40	1.99		17.95	7.29	0.93		19.30	7.84	0.83		19.30	7.84	0.83		20.67	8.39	0.71		20.67	8.39	0.71																											
75 (23.9)	67 (19.4)	23.27	13.31	1.99	662	16.36	9.31	0.95	457	17.59	10.02	0.86	482	18.84	10.76	0.75	508	20.11	11.51	0.61	508	18.84	10.76	0.75	482	17.59	10.02	0.86	457	16.36	9.31	0.95																			
	63 (17.2)	21.53	15.58	1.99		15.18	10.89	0.97		16.33	11.74	0.88		16.33	11.74	0.88		17.49	12.62	0.77		17.49	12.62	0.77																											
	57 (13.9)	19.26	18.92	1.98		13.59	13.23	0.98		14.63	14.27	0.90		14.63	14.27	0.90		15.69	15.35	0.81		15.69	15.35	0.81																											
	72 (22.2)	25.60	10.40	1.99		17.95	7.29	0.93		19.30	7.84	0.83		19.30	7.84	0.83		20.67	8.39	0.71		20.67	8.39	0.71																											
	67 (19.4)	23.27	13.31	1.99		16.36	9.31	0.95		17.59	10.02	0.86		17.59	10.02	0.86		18.84	10.76	0.75		18.84	10.76	0.75																											
80 (26.7)	63 (17.2)	21.53	15.58	1.99	662	15.18	10.89	0.97	457	16.33	11.74	0.88	482	17.49	12.62	0.77	508	18.68	13.53	0.65	508	17.49	12.62	0.77	482	16.33	11.74	0.88	457	15.18	10.89	0.97																			
	57 (13.9)	19.26	18.92	1.98		13.59	13.23	0.98		14.63	14.27	0.90		14.63	14.27	0.90		15.69	15.35	0.81		15.69	15.35	0.81																											
	72 (22.2)	25.60	10.40	1.99		17.95	7.29	0.93		19.30	7.84	0.83		19.30	7.84	0.83		20.67	8.39	0.71		20.67	8.39	0.71																											
	67 (19.4)	23.27	13.31	1.99		16.36	9.31	0.95		17.59	10.02	0.86		17.59	10.02	0.86		18.84	10.76	0.75		18.84	10.76	0.75																											
	57 (13.9)	19.26	18.92	1.98		13.59	13.23	0.98		14.63	14.27	0.90		14.63	14.27	0.90		15.69	15.35	0.81		15.69	15.35	0.81																											

Operation in this area is restricted to maintain reliable system operation and customer comfort. The system will default to the next available stage
Stage 5 - Compressor speed limited to stage four at 65 outdoor. **Stage 1** - Compressor speed limited to stage two at 105 outdoor.

See additional notes on page 28

DETAILED COOLING CAPACITIES# - EFFICIENCY MODE & COMFORT + DEHUMIDIFY MODE CONTINUED

TVA948

COOLING INDOOR MODEL	2-STAGE (Hi-Stage 5, Lo-Stage 2)			FURNACE MODEL	
	COOLING INDOOR MODEL	HIGH SPEED CAP.	POWER		LOW SPEED CAP.
FVM4X60**L	FVM4X60**L	1.00	1.00	1.00	
FVM4X48**L	FVM4X48**L	0.99	0.99	0.99	
EA*4X48L17A*	EA*4X48L17A*	0.98	1.05	0.97	*9M*0801716A**
EA*4X48L21A*	EA*4X48L21A*	0.96	1.00	0.98	*9M*1002120A**
EA*4X60L21A*	EA*4X60L21A*	0.99	1.04	0.99	*9M*1002120A**
EA*4X60L24A*	EA*4X60L24A*	0.99	1.04	0.99	*9M*1002120A**
ENH4X48L21**	ENH4X48L21**	0.97	1.01	0.96	*9M*0802120A**
ENH4X48L21**	ENH4X48L21**	0.97	1.01	0.99	*9M*1002120A**
EN(A,D)W4X48L21**	EN(A,D)W4X48L21**	0.97	1.01	0.96	*9M*0802120A**
EHD4X48AAL	EHD4X48AAL	0.97	1.06	0.97	*9M*0801716A**
EHD4X48AAL	EHD4X48AAL	0.97	1.01	0.96	*9M*0802120A**
EHD4X48AAL	EHD4X48AAL	0.97	1.01	0.99	*9M*1002120A**
EHD4X60AAL	EHD4X60AAL	0.99	0.99	1.00	*9M*1002120A**

See notes on page 28

COOLING INDOOR MODEL	CAPACITY	POWER	FURNACE MODEL
FCM4X60**L	1.00	1.00	
FCM4X48**L	0.98	0.98	
EA*4X48L17A*	0.97	1.01	*8MV*0901716**
EA*4X48L21A*	0.96	1.05	*9MA*0602120A**
EA*4X48L21A*	0.97	1.01	*9MA*0802120A**
EA*4X48L21A*	0.97	1.01	*9MA*1002122A**
EA*4X48L21A*	0.97	1.01	*8MV*1102120**
EA*4X48L21A*	0.97	1.01	*9MA*1202422A**
EA*4X48L24A*	0.97	1.01	*8MV*1352422**
EA*4X60L21A*	0.98	1.08	*9MA*0602120A**
EA*4X60L21A*	0.99	1.04	*9MA*0802120A**
EA*4X60L21A*	0.99	0.99	*9MA*1002122A**
EA*4X60L24A*	0.99	0.99	*8MV*1102120**
EA*4X60L24A*	0.99	1.04	*9MA*1202422A**
ENH4X48L21**	0.97	1.06	*8MV*1352422**
ENH4X48L21**	0.97	1.06	*9MA*0602120A**
ENH4X48L21**	0.97	1.01	*9MA*1002122A**
ENH4X48L21**	0.97	1.01	*8MV*1102120**
ENH4X60L24**	0.99	1.04	*9MA*1202422A**
ENH4X60L24**	0.99	1.04	*8MV*1352422**
ENH4X61L24**	1.00	1.05	*8MV*1352422**
EN(A,D)W4X48L21**	0.97	1.06	*9MA*0602120A**
EN(A,D)W4X48L21**	0.97	1.01	*9MA*0802120A**
EN(A,D)W4X48L21**	0.97	1.01	*9MA*1002122A**
EN(A,D)W4X48L21**	0.97	1.01	*8MV*1102120**
EN(A,D)W4X48L21**	0.97	1.01	*9MA*1202422A**
EN(A,D)W4X60L24**	0.99	0.99	*8MV*1352422**
EN(A,D)W4X60L24**	0.99	0.99	*9MA*0602120A**
EN(A,D)W4X60L24**	0.99	1.05	*9MA*0802120A**
EN(A,D)W4X60L24**	1.00	1.00	*9MA*1002122A**
EN(A,D)W4X60L24**	0.97	1.06	*8MV*1352422**
EHD4X48AAL	0.98	1.03	*9MA*0602120A**
EHD4X48AAL	0.98	1.03	*9MA*0802120A**
EHD4X48AAL	0.98	1.03	*9MA*1002122A**
EHD4X48AAL	0.98	1.03	*9MA*1202422A**
EHD4X48AAL	0.98	1.03	*8MV*1352422**
EHD4X48AAL	0.98	1.03	*8MV*0901716**
EHD4X48AAL	0.98	0.98	*8MV*1352422**
EHD4X60AAL	0.99	1.04	*9MA*0602120A**
EHD4X60AAL	0.99	0.99	*9MA*0802120A**
EHD4X60AAL	0.99	0.99	*9MA*1002122A**
EHD4X60AAL	0.99	0.99	*9MA*1202422A**
EHD4X60AAL	0.99	0.99	*8MV*1352422**
EHD4X60AAL	1.00	1.00	*8MV*0901716**
EHD4X60AAL	1.00	1.00	*8MV*1102120**
EHD4X60AAL	1.00	1.00	*8MV*1352422**

TVA949
DETAILED COOLING CAPACITIES# - EFFICIENCY MODE CONTINUED

EDB °F (°C)	EVAR. AIR °F (°C)	TVA960 / FCMA460***L Efficiency Mode Condenser Entering Air Temperature °F (°C)										TVA948 / FCMA460***L Comfort + Dehumidify Mode Condenser Entering Air Temperature °F (°C)																					
		115 (46.1)					105 (40.5)					95 (35)					85 (29.4)					75 (23.9)					65 (18.3)						
		ID SCF	M	Total Sens KW**	Total Sens KW**	Total Sens KW**	ID SCF	M	Total Sens KW**	Total Sens KW**	Total Sens KW**	ID SCF	M	Total Sens KW**	Total Sens KW**	Total Sens KW**	ID SCF	M	Total Sens KW**	Total Sens KW**	Total Sens KW**	ID SCF	M	Total Sens KW**	Total Sens KW**	Total Sens KW**	ID SCF	M	Total Sens KW**	Total Sens KW**	Total Sens KW**		
75 (23.9)	72(22.2)	1200	43.98	18.09	5.07	47.11	19.28	4.34	50.17	20.46	3.71	53.15	21.62	3.16	56.08	22.77	2.69	59.96	23.91	2.29	1200	38.26	15.73	1.95	40.35	16.53	1.77	42.37	17.31	1.60	44.33	18.13	1.87
	67(19.4)	1200	39.97	23.90	4.99	42.83	25.20	4.27	45.61	26.48	3.64	48.30	27.73	3.10	50.95	28.97	2.63	53.57	30.21	2.24	1200	34.71	20.78	1.99	36.59	21.64	1.81	38.43	22.49	1.65	40.35	16.53	1.77
	63(17.2)	1200	37.01	28.46	4.94	39.67	29.83	4.22	42.25	31.19	3.59	44.76	32.51	3.06	47.20	33.82	2.59	49.61	35.12	2.16	1200	32.09	24.74	2.02	33.84	25.66	1.85	35.53	26.54	1.68	37.13	27.73	2.02
80 (26.7)	72(22.2)	1200	43.85	23.88	5.07	46.98	25.17	4.34	50.03	26.45	3.71	53.02	27.71	3.16	55.94	28.95	2.69	58.82	30.19	2.29	1200	38.26	15.73	1.95	40.35	16.53	1.77	42.37	17.31	1.60	44.33	18.13	1.87
	67(19.4)	1200	39.86	29.62	4.99	42.72	31.02	4.27	45.50	32.39	3.64	48.20	33.74	3.10	50.85	35.07	2.63	53.46	36.40	2.24	1200	34.71	20.78	1.99	36.59	21.64	1.81	38.43	22.49	1.65	40.35	16.53	1.77
	63(17.2)	1200	36.99	34.13	4.94	39.63	35.61	4.22	42.20	37.06	3.59	44.70	38.49	3.06	47.13	39.89	2.59	49.53	41.29	2.20	1200	32.09	24.74	2.02	33.84	25.66	1.85	35.53	26.54	1.68	37.13	27.73	2.02
75 (23.9)	72(22.2)	1100	31.71	13.28	2.51	34.01	14.13	2.35	36.11	14.92	2.13	38.26	15.73	1.95	40.35	16.53	1.77	42.37	17.31	1.60	1100	32.09	24.74	2.02	33.84	25.66	1.85	35.53	26.54	1.68	37.13	27.73	2.02
	67(19.4)	1100	28.66	18.08	2.54	30.76	19.01	2.39	32.75	19.90	2.16	34.71	20.78	1.99	36.59	21.64	1.81	38.43	22.49	1.65	1100	30.26	23.79	2.19	32.09	24.74	2.02	33.84	25.66	1.85	35.53	26.54	1.68
	63(17.2)	1100	26.39	21.83	2.57	28.39	22.84	2.42	30.26	23.79	2.19	32.09	24.74	2.02	33.84	25.66	1.85	35.53	26.54	1.68	1100	27.87	27.87	2.23	29.32	29.32	2.06	30.68	30.68	1.90	32.01	32.01	1.74
80 (26.7)	72(22.2)	1100	31.60	18.13	2.51	33.89	19.05	2.35	35.99	19.90	2.13	38.14	20.79	1.95	40.23	21.65	1.77	42.25	22.50	1.60	1100	32.65	16.46	1.82	34.61	16.88	1.10	36.50	17.31	1.60	38.43	18.13	1.87
	67(19.4)	1100	28.56	22.87	2.54	30.68	23.87	2.39	32.65	24.82	2.16	34.61	25.77	1.99	36.50	26.70	1.81	38.33	27.61	1.65	1100	30.27	28.66	2.19	32.08	30.67	1.85	33.82	30.67	1.85	35.50	31.63	1.68
	63(17.2)	1100	26.51	26.44	2.57	28.44	27.61	2.42	30.27	28.66	2.19	32.08	29.68	2.02	33.82	30.67	1.85	35.50	31.63	1.68	1100	28.44	27.61	2.42	30.27	28.66	2.19	32.08	29.68	2.02	33.82	30.67	1.85
75 (23.9)	72(22.2)	1100	25.50	10.93	1.36	27.37	11.61	1.48	29.65	12.42	1.20	31.15	13.15	1.04	32.59	13.89	0.99	33.95	14.63	0.87	1100	21.65	9.08	0.82	22.92	9.55	0.79	24.14	10.00	0.66	25.29	10.43	0.45
	67(19.4)	1100	22.96	15.35	1.41	24.72	16.11	1.50	26.50	16.90	1.27	28.66	17.78	1.12	30.68	18.68	0.98	32.65	19.55	0.82	1100	19.15	15.57	1.04	19.11	15.57	1.04	20.14	16.08	0.98	21.10	16.56	0.84
	63(17.2)	1100	20.31	20.31	1.46	21.67	21.67	1.62	23.16	23.16	1.48	24.62	24.62	1.36	26.44	26.44	1.43	28.33	28.33	1.58	1100	18.17	18.17	0.98	19.18	18.88	1.03	20.18	19.44	0.97	21.13	19.95	0.83
80 (26.7)	72(22.2)	1100	25.40	15.42	1.36	27.27	16.15	1.48	29.49	17.16	1.27	31.76	18.13	1.04	33.95	19.05	0.99	36.33	19.95	0.87	1100	21.65	9.08	0.82	22.92	9.55	0.79	24.14	10.00	0.66	25.29	10.43	0.45
	67(19.4)	1100	22.89	19.78	1.41	24.64	20.59	1.54	26.44	20.59	1.54	28.33	23.23	1.58	30.23	23.23	1.58	32.19	23.19	1.58	1100	18.17	18.17	0.98	19.18	18.88	1.03	20.18	19.44	0.97	21.13	19.95	0.83
	63(17.2)	1100	21.79	21.79	1.43	23.19	23.19	1.58	24.62	24.62	1.36	26.44	26.44	1.43	28.33	28.33	1.58	30.23	28.33	1.58	1100	18.13	18.13	0.99	19.05	19.05	1.04	20.18	19.44	0.97	21.13	19.95	0.83

DETAILED COOLING CAPACITIES# - COMFORT + DEHUMIDIFY MODE CONTINUED

EDB °F (°C)	EVAR. AIR °F (°C)	TVA960 / FCMA460***L Efficiency Mode Condenser Entering Air Temperature °F (°C)										TVA948 / FCMA460***L Comfort + Dehumidify Mode Condenser Entering Air Temperature °F (°C)																					
		115 (46.1)					105 (40.5)					95 (35)					85 (29.4)					75 (23.9)					65 (18.3)						
		ID SCF	M	Total Sens KW**	Total Sens KW**	Total Sens KW**	ID SCF	M	Total Sens KW**	Total Sens KW**	Total Sens KW**	ID SCF	M	Total Sens KW**	Total Sens KW**	Total Sens KW**	ID SCF	M	Total Sens KW**	Total Sens KW**	Total Sens KW**	ID SCF	M	Total Sens KW**	Total Sens KW**	Total Sens KW**	ID SCF	M	Total Sens KW**	Total Sens KW**	Total Sens KW**		
75 (23.9)	72(22.2)	1110	46.54	18.96	4.29	50.07	20.40	3.70	53.13	21.61	3.16	56.08	22.77	2.69	59.29	24.06	2.31	62.25	25.36	2.05	1184	48.28	27.70	3.09	50.95	28.97	2.69	53.87	30.54	2.25	56.54	33.82	2.59
	67(19.4)	1110	42.30	24.45	4.22	45.51	26.34	3.63	48.28	27.70	3.09	50.95	28.97	2.69	53.87	30.54	2.25	56.54	33.82	2.59	1184	44.73	32.47	3.05	47.20	33.82	2.63	49.89	35.60	2.21	52.87	38.43	2.21
	63(17.2)	1110	39.17	28.75	4.17	42.16	30.99	3.58	44.73	32.47	3.05	47.20	33.82	2.63	49.89	35.60	2.21	52.87	38.43	2.21	1184	40.08	39.39	3.00	42.23	40.91	2.55	44.62	42.99	2.17	46.42	44.62	2.17
80 (26.7)	72(22.2)	1110	46.42	24.43	4.29	49.94	26.31	3.70	53.00	27.67	3.16	55.94	28.95	2.69	59.15	30.52	2.31	62.25	25.36	2.05	1184	48.18	33.69	3.09	50.85	35.07	2.63	53.76	36.91	2.25	56.54	33.82	2.59
	67(19.4)	1110	42.20	29.85	4.22	45.40	32.18	3.63	48.18	33.69	3.09	50.85	35.07	2.63	53.76	36.91	2.25	56.54	33.82	2.59	1184	44.68	38.43	3.05	47.13	39.89	2.59	49.82	41.94	2.21	52.87	38.43	2.21
	63(17.2)	1110	39.12	34.12	4.17	42.11	36.80	3.58	44.68	38.43	3.05	47.13	39.89	2.59	50.85	35.07	2.63	53.76	36.91	2.25	1184	42.12	42.12	3.02	44.13	44.13	2.56	46.52	46.52	2.18	48.28	46.52	2.18
75 (23.9)	72(22.2)	744	31.76	12.87	2.31	34.19	13.86	2.08	36.50	14.80	1.91	38.82	15.74	1.73	41.70	16.95	1.58	44.63	17.31	1.60	887	33.07	18.68	1.95	35.18	19.88	1.78	37.81	21.67	1.62	40.35	16.53	1.77
	67(19.4)	744	28.68	16.17	2.35	30.95	17.50	2.12	33.07	18.68	1.95	35.18	19.88	1.78	37.81	21.67	1.62	40.35	16.53	1.77	887	30.54	21.70	1.98	32.50	23.11	1.81	34.96	25.37	1.66	37.13	27.73	2.02
	63(17.2)	744	26.41	18.74	2.38	28.56	20.33	2.15	30.54	21.70	1.98	32.50	23.11	1.81	34.96	25.37	1.66	37.13	27.73	2.02	887	27.13	26.11	2.04	28.92	27.83	1.87	31.19	30.72	1.72	33.82	30.72	1.72
80 (26.7)	72(22.2)	744	31.68	16.23	2.31	34.10	17.52	2.08	36.41	18.70	1.91	38.72	19.90	1.73	41.58	21.69	1.58	44.63	17.31	1.60	887	32.99	22.53	1.95	35.10	23.98	1.78	37.72	26.35	1.62	40.35	16.53	1.77
	67(19.4)	744	28.61	19.49	2.35	30.88	21.11	2.12	32.99	22.53	1.95	35.10	23.98	1.78	37.72	26.35	1.62	40.35	16.53	1.77	887	30.49	25.53	1.98	32.46	27.19	1.81	34.91	30.02	1.66	37.13	27.73	2.02
	63(17.2)	744	26.36	22.05	2.38	28.52	23.93	2.15	30.49	25.53	1.98	32.46	27.19	1.81	34.91	30.02	1.66	37.13	27.73	2.02	887	28.33	28.33	2.02	28.33	28.33	1.8						

DETAILED COOLING CAPACITIES# - EFFICIENCY MODE & COMFORT + DEHUMIDIFY MODE CONTINUED

TVA949

COOLING INDOOR MODEL	2-STAGE (Hi-Stage 5, Lo-Stage 2)			FURNACE MODEL
	HIGH SPEED CAP	POWER	LOW SPEED CAP	
FVM4X48**L	1.01	1.01	1.00	
FVM4X60**L	1.01	1.01	1.01	
EHD4X48AAL	1.00	1.02	1.00	*9MX*1002120A**

COOLING INDOOR MODEL	CAPACITY	POWER	FURNACE MODEL
FCM4X60**L	1.00	1.00	
FCM4X48**L	0.98	0.98	
EA*4X48L21A*	0.95	1.01	*9MA*0602120A**
EA*4X48L21A*	0.99	1.06	*8MV*0902116**
EA*4X48L21A*	0.99	1.03	*8MV*1102122**
EA*4X48L24A*	0.96	0.98	*9MA*0602120A**
EA*4X48L24A*	0.96	0.98	*9MA*1002122A**
EA*4X48L24A*	0.96	0.98	*9MA*1202422A**
EA*4X48L24A*	0.98	1.00	*8MV*1352422B*
EA*4X48L24A*	0.99	1.06	*9MV*1202422A**
EA*4X60L21A*	0.97	1.03	*9MA*0602120A**
EA*4X60L21A*	0.99	1.01	*8MV*0902116**
EA*4X60L21A*	0.99	1.06	*9MV*0602120A**
EA*4X60L21A*	1.01	1.08	*9MV*1002120A**
EA*4X60L21A*	0.99	1.01	*8MV*1102122**
EA*4X60L24A*	0.98	0.98	*9MA*0602120A**
EA*4X60L24A*	0.98	0.98	*9MA*1002122A**
EA*4X60L24A*	0.98	0.98	*9MA*1202422A**
EA*4X60L24A*	1.00	1.02	*8MV*1352422B*
EA*4X60L24A*	0.99	1.01	*9MV*1202422A**
EA*4X61L24A*	1.03	1.03	*8MV*1352422B*
EA*4X61L24A*	1.01	1.01	*9MV*1202422A**
ENH4X48L21**	1.00	1.07	*8MV*0902116**
ENH4X48L21**	0.99	1.06	*8MV*1102122**
ENH4X60L24**	1.00	1.02	*8MV*1352422B*
ENH4X60L24**	0.99	1.03	*9MV*1202422A**
ENH4X61L24**	1.00	1.02	*8MV*1352422B*
ENH4X61L24**	1.01	1.08	*9MV*1202422A**
EN(A,D,W)4X48L21**	0.96	1.02	*9MA*0602120A**
EN(A,D,W)4X48L21**	0.98	1.06	*8MV*0902116**
EN(A,D,W)4X48L21**	0.99	1.03	*8MV*1102122**
EN(A,D,W)4X48L24**	0.99	1.03	*8MV*1352422B*
EN(A,D,W)4X48L24**	0.99	1.06	*9MA*1002122A**
EN(A,D,W)4X60L24**	0.97	0.97	*9MA*0602120A**
EN(A,D,W)4X60L24**	0.98	0.98	*9MA*1002122A**
EN(A,D,W)4X60L24**	0.98	0.98	*9MA*1202422A**
EN(A,D,W)4X60L24**	1.00	1.02	*8MV*1352422B*
EN(A,D,W)4X60L24**	0.99	1.03	*9MV*1202422A**
EN(A,D,W)4X60L24**	0.98	0.98	*9MA*0602120A**
EN(A,D,W)4X60L24**	0.99	0.99	*9MA*1002122A**
EN(A,D,W)4X60L24**	0.98	0.98	*9MA*1202422A**
EN(A,D,W)4X60L24**	1.01	1.04	*8MV*1352422B*
EN(A,D,W)4X60L24**	1.00	1.02	*9MV*1202422A**
EHD4X48AAL	0.99	1.03	*8MV*0902116**
EHD4X48AAL	0.99	1.01	*8MV*1352422B*
EHD4X48AAL	0.99	1.06	*9MV*1002120A**
EHD4X48AAL	0.99	1.03	*8MV*1102122**
EHD4X60AAL	1.00	1.02	*8MV*0902116**
EHD4X60AAL	1.00	1.02	*8MV*1352422B*
EHD4X60AAL	1.00	1.07	*9MV*0801716A**
EHD4X60AAL	1.00	1.07	*9MV*0602120A**
EHD4X60AAL	1.00	1.07	*9MV*1002120A**
EHD4X60AAL	0.99	1.01	*9MV*1202422A**
EHD4X60AAL	1.00	1.02	*8MV*1102122**

TVA960
DETAILED COOLING CAPACITIES# – EFFICIENCY MODE CONTINUED

EDB °F (°C)	EVAP AIR	TVA960 / FCM4X60***L Efficiency Mode Condenser Entering Air Temperature °F (°C)																							
		115 (46.1)				105 (40.5)				95 (35)				85 (29.4)				75 (23.9)				65 (18.3)			
		ID SCF M	Capacity MBtuh Sens ‡	Total Sys. KW**	Total Sys. KW**	ID SCF M	Capacity MBtuh Sens ‡	Total Sys. KW**	Total Sys. KW**	ID SCF M	Capacity MBtuh Sens ‡	Total Sys. KW**	Total Sys. KW**	ID SCF M	Capacity MBtuh Sens ‡	Total Sys. KW**	Total Sys. KW**	ID SCF M	Capacity MBtuh Sens ‡	Total Sys. KW**	Total Sys. KW**				
75 (23.9)	72 (22.2)	55.38	22.79	7.70	6.73	62.54	25.53	5.88	5.13	65.96	26.86	5.13	5.13	69.30	28.16	4.47	4.47	72.44	37.26	3.89	3.89				
	67 (19.4)	50.63	30.18	7.50	6.54	57.12	33.14	5.70	4.96	60.22	34.57	4.96	4.96	63.25	35.99	4.32	4.32	66.10	45.08	3.75	3.75				
	63 (17.2)	47.11	36.00	7.35	6.40	53.13	39.12	5.57	4.84	55.99	40.62	4.84	4.84	58.78	42.11	4.21	4.21	61.52	43.58	3.65	3.65				
	57 (13.9)	43.16	43.16	7.19	6.23	47.97	47.63	5.40	4.69	50.44	49.37	4.69	4.69	52.86	51.01	4.06	4.06	55.26	52.62	3.52	3.52				
	72 (22.2)	55.24	30.04	7.70	6.73	62.40	33.00	5.88	5.13	65.82	34.44	5.13	5.13	69.15	35.85	4.47	4.47	72.44	37.26	3.89	3.89				
80 (26.7)	67 (19.4)	50.50	37.37	7.50	6.54	57.00	40.53	5.70	4.96	60.10	42.07	4.96	4.96	63.13	43.59	4.32	4.32	66.10	45.08	3.75	3.75				
	63 (17.2)	47.09	43.10	7.35	6.40	53.07	46.46	5.57	4.84	55.91	48.08	4.84	4.84	58.70	49.67	4.21	4.21	61.44	51.25	3.65	3.65				
	57 (13.9)	45.62	45.62	7.29	6.33	50.51	50.51	5.49	4.76	52.83	52.83	4.76	4.76	55.06	55.06	4.12	4.12	57.24	57.24	3.56	3.56				
	72 (22.2)	35.94	15.07	3.39	3.08	40.44	16.73	2.76	2.51	42.79	17.61	2.51	2.51	45.10	18.48	2.29	2.29	47.36	19.34	2.08	2.08				
	67 (19.4)	32.49	20.54	3.35	3.05	36.67	22.32	2.72	2.47	38.80	23.24	2.47	2.47	40.88	24.15	2.24	2.24	42.94	25.05	2.04	2.04				
75 (23.9)	63 (17.2)	29.95	24.83	3.33	3.03	33.87	26.70	2.69	2.44	35.85	27.65	2.44	2.44	37.78	28.59	2.22	2.22	39.68	29.52	2.01	2.01				
	57 (13.9)	28.14	28.14	3.32	3.02	31.24	31.24	2.67	2.42	32.75	32.75	2.42	2.42	34.21	34.21	2.19	2.19	35.65	35.65	1.99	1.99				
	72 (22.2)	35.82	20.59	3.39	3.08	40.32	22.34	2.76	2.51	42.67	23.26	2.51	2.51	44.98	24.17	2.29	2.29	47.24	25.07	2.08	2.08				
	67 (19.4)	32.39	26.01	3.35	3.05	36.56	27.87	2.72	2.47	38.70	28.83	2.47	2.47	40.78	29.77	2.24	2.24	42.84	30.72	2.04	2.04				
	63 (17.2)	30.07	30.04	3.29	3.03	33.90	32.16	2.69	2.44	35.85	33.17	2.44	2.44	37.76	34.16	2.22	2.22	39.65	35.14	2.01	2.01				
80 (26.7)	57 (13.9)	30.02	30.02	3.33	3.03	33.22	33.22	2.68	2.43	34.80	34.80	2.43	2.43	36.33	36.33	2.21	2.21	37.82	37.82	2.00	2.00				
	72 (22.2)	26.64	11.34	1.89	1.84	28.56	12.02	1.03	1.00	22.26	9.26	1.00	1.00	23.59	9.73	0.91	0.91	24.89	10.21	0.75	0.75				
	67 (19.4)	23.86	15.71	1.89	1.84	25.60	16.40	1.02	1.00	19.89	12.40	1.00	1.00	21.11	12.85	0.92	0.92	22.30	13.31	0.77	0.77				
	63 (17.2)	21.85	19.14	1.89	1.84	23.45	19.83	1.01	1.00	18.11	14.83	1.00	1.00	19.24	15.26	0.92	0.92	20.34	15.69	0.79	0.79				
	57 (13.9)	20.91	20.91	1.88	1.84	22.14	22.14	1.01	1.00	16.81	16.81	1.00	1.00	17.62	17.62	0.94	0.94	18.38	18.38	0.81	0.81				
80 (26.7)	72 (22.2)	26.55	15.84	1.89	1.84	28.46	16.52	1.03	1.00	22.18	12.52	1.00	1.00	23.51	12.97	0.91	0.91	24.81	13.42	0.75	0.75				
	67 (19.4)	23.79	20.16	1.89	1.84	25.52	20.85	1.02	1.00	19.83	15.62	1.00	1.00	21.05	16.05	0.92	0.92	22.24	16.48	0.77	0.77				
	63 (17.2)	22.48	22.48	1.89	1.84	23.77	23.77	1.01	1.00	18.20	17.98	1.00	1.00	19.28	18.43	0.92	0.92	20.35	18.85	0.79	0.79				
	57 (13.9)	22.44	22.44	1.89	1.84	23.72	23.72	1.01	1.00	18.08	18.08	1.00	1.00	18.91	18.91	0.93	0.93	19.70	19.70	0.80	0.80				
	72 (22.2)	26.64	11.34	1.89	1.84	28.56	12.02	1.03	1.00	22.26	9.26	1.00	1.00	23.59	9.73	0.91	0.91	24.89	10.21	0.75	0.75				

Operation in this area is restricted to maintain reliable system operation and customer comfort. The system will default to the next available stage
Stage 1 – Compressor speed limited to stage two at 105 and 115 outdoor.

See additional notes on page 28

TVA960
DETAILED COOLING CAPACITIES# - COMFORT + DEHUMIDIFY MODE CONTINUED

EDB °F (°C)	EVA/P AIR EWB °F (°C)	TVA960 / FCMA260**+L Comfort + Dehumidify Mode Condenser Entering Air Temperature °F (°C)												Total Sys. KW				
		105 (40.5)				95 (35)				75 (23.9)					65 (18.3)			
		ID SCFM	Capacity MBtuh Total	Sensit	Total Sys. KW	ID SCFM	Capacity MBtuh Total	Sensit	Total Sys. KW	ID SCFM	Capacity MBtuh Total	Sensit	Total Sys. KW		ID SCFM	Capacity MBtuh Total	Sensit	Total Sys. KW
75 (23.9)	72 (22.2)	57.74	23.45	6.51	61.60	25.02	5.73	65.43	26.57	5.06	69.11	28.06	4.43	71.73	29.06	3.80		
	67 (19.4)	52.75	29.96	6.32	56.26	31.94	5.56	59.74	33.92	4.89	63.08	35.74	4.28	65.39	36.48	3.66		
	63 (17.2)	49.06	35.05	6.19	52.31	37.35	5.43	55.53	39.67	4.77	58.62	41.74	4.17	60.75	42.26	3.56		
	57 (13.9)	44.14	42.48	6.02	47.05	45.25	5.27	49.93	48.04	4.62	52.69	50.49	4.02	54.52	50.74	3.43		
	72 (22.2)	57.61	29.82	6.52	61.47	31.80	5.74	65.28	33.78	5.06	68.97	35.61	4.43	71.59	36.37	3.80		
80 (26.7)	67 (19.4)	52.65	36.25	6.32	56.15	38.64	5.56	59.62	41.04	4.89	62.96	43.19	4.28	65.29	43.67	3.66		
	63 (17.2)	48.99	41.31	6.19	52.23	44.02	5.43	55.45	46.75	4.77	58.54	49.15	4.17	60.67	49.42	3.56		
	57 (13.9)	45.90	45.90	6.08	48.92	48.92	5.33	51.93	51.93	4.67	54.72	54.72	4.07	55.91	55.91	3.46		
	72 (22.2)	36.98	15.01	3.25	39.25	15.94	2.79	41.77	16.95	2.44	44.28	17.97	2.13	47.05	19.11	1.87		
	67 (19.4)	33.40	19.03	3.22	35.55	20.23	2.75	37.83	21.50	2.39	40.10	22.76	2.09	42.62	24.30	1.84		
75 (23.9)	63 (17.2)	30.77	22.16	3.21	32.82	23.59	2.72	34.94	25.04	2.37	37.04	26.50	2.06	39.38	28.36	1.81		
	57 (13.9)	27.31	26.75	3.18	29.19	28.48	2.69	31.09	30.22	2.34	32.99	31.96	2.04	35.10	34.26	1.79		
	72 (22.2)	36.89	19.10	3.25	39.15	20.27	2.79	41.66	21.53	2.44	44.17	22.80	2.13	46.93	24.34	1.87		
	67 (19.4)	33.32	23.06	3.22	35.47	24.51	2.75	37.74	26.01	2.39	40.02	27.53	2.09	42.53	29.47	1.84		
	63 (17.2)	30.72	26.18	3.21	32.77	27.85	2.72	34.89	29.54	2.37	36.99	31.25	2.06	39.33	33.50	1.81		
80 (26.7)	57 (13.9)	28.74	28.74	3.19	30.65	30.65	2.70	32.58	32.58	2.35	34.53	34.53	2.05	36.85	36.85	1.80		
	72 (22.2)	27.11	11.00	2.21	19.91	8.07	1.22	20.99	8.50	1.01	22.49	9.11	0.80	24.02	9.73	0.59		
	67 (19.4)	24.28	13.80	2.21	17.69	10.04	1.21	18.67	10.45	1.01	20.04	11.19	0.81	21.43	11.97	0.61		
	63 (17.2)	22.21	15.99	2.20	16.05	11.57	1.21	16.97	11.96	1.01	18.23	12.81	0.82	19.53	13.71	0.62		
	57 (13.9)	19.51	19.20	2.20	13.98	13.85	1.20	14.76	14.19	1.02	15.88	15.20	0.84	17.03	16.27	0.65		
75 (23.9)	72 (22.2)	27.04	13.93	2.21	19.86	10.20	1.22	20.94	10.61	1.01	22.43	11.35	0.80	23.96	12.13	0.59		
	67 (19.4)	24.22	16.71	2.21	17.65	12.16	1.21	18.63	12.54	1.01	19.99	13.42	0.81	21.39	14.35	0.61		
	63 (17.2)	22.18	18.88	2.20	16.04	13.68	1.21	16.95	14.04	1.01	18.21	15.03	0.82	19.50	16.08	0.62		
	57 (13.9)	20.65	20.65	2.20	14.90	14.90	1.20	15.50	15.50	1.02	16.63	16.63	0.83	17.82	17.82	0.64		
	72 (22.2)	27.11	11.00	2.21	19.91	8.07	1.22	20.99	8.50	1.01	22.49	9.11	0.80	24.02	9.73	0.59		
80 (26.7)	67 (19.4)	24.28	13.80	2.21	17.69	10.04	1.21	18.67	10.45	1.01	20.04	11.19	0.81	21.43	11.97	0.61		
	63 (17.2)	22.21	15.99	2.20	16.05	11.57	1.21	16.97	11.96	1.01	18.23	12.81	0.82	19.53	13.71	0.62		
	57 (13.9)	19.51	19.20	2.20	13.98	13.85	1.20	14.76	14.19	1.02	15.88	15.20	0.84	17.03	16.27	0.65		
	72 (22.2)	27.04	13.93	2.21	19.86	10.20	1.22	20.94	10.61	1.01	22.43	11.35	0.80	23.96	12.13	0.59		
	67 (19.4)	24.22	16.71	2.21	17.65	12.16	1.21	18.63	12.54	1.01	19.99	13.42	0.81	21.39	14.35	0.61		
75 (23.9)	63 (17.2)	22.18	18.88	2.20	16.04	13.68	1.21	16.95	14.04	1.01	18.21	15.03	0.82	19.50	16.08	0.62		
	57 (13.9)	20.65	20.65	2.20	14.90	14.90	1.20	15.50	15.50	1.02	16.63	16.63	0.83	17.82	17.82	0.64		
	72 (22.2)	27.11	11.00	2.21	19.91	8.07	1.22	20.99	8.50	1.01	22.49	9.11	0.80	24.02	9.73	0.59		
	67 (19.4)	24.28	13.80	2.21	17.69	10.04	1.21	18.67	10.45	1.01	20.04	11.19	0.81	21.43	11.97	0.61		
	63 (17.2)	22.21	15.99	2.20	16.05	11.57	1.21	16.97	11.96	1.01	18.23	12.81	0.82	19.53	13.71	0.62		
80 (26.7)	57 (13.9)	19.51	19.20	2.20	13.98	13.85	1.20	14.76	14.19	1.02	15.88	15.20	0.84	17.03	16.27	0.65		
	72 (22.2)	27.04	13.93	2.21	19.86	10.20	1.22	20.94	10.61	1.01	22.43	11.35	0.80	23.96	12.13	0.59		
	67 (19.4)	24.22	16.71	2.21	17.65	12.16	1.21	18.63	12.54	1.01	19.99	13.42	0.81	21.39	14.35	0.61		
	63 (17.2)	22.18	18.88	2.20	16.04	13.68	1.21	16.95	14.04	1.01	18.21	15.03	0.82	19.50	16.08	0.62		
	57 (13.9)	20.65	20.65	2.20	14.90	14.90	1.20	15.50	15.50	1.02	16.63	16.63	0.83	17.82	17.82	0.64		

Operation in this area is restricted to maintain reliable system operation and customer comfort. The system will default to the next available stage
Stage 5 - Compressor speed limited to stage four at 65 outdoor. **Stage 1** - Compressor speed limited to stage two at 105 outdoor.

See additional notes on page 28

GUIDE SPECIFICATIONS

GENERAL

System Description

Outdoor-mounted, air-cooled, split-system air conditioning unit suitable for ground or rooftop installation. Unit consists of a hermetic compressor, an air-cooled coil, forward-swept blade propeller-type condenser fan, and a control box. Unit will discharge supply air upward as shown on contract drawings. Unit will be used in a refrigeration circuit to match up to a packaged fan coil or coil unit.

Quality Assurance

- Unit will be rated in accordance with the latest edition of AHRI Standard 240.
- Unit will be certified for capacity and efficiency, and listed in the latest AHRI directory.
- Unit construction will comply with latest edition of ASHRAE and with NEC.

PRODUCTS

Equipment

- Factory-assembled, single-piece, air-cooled air conditioning unit. Contained within the unit enclosure is all factory wiring, piping, controls, compressor, refrigerant charge R-410A refrigerant, and special features required prior to field start-up.

Unit Cabinet

- Unit cabinet will be constructed of galvanized steel, bonderized, and coated with a powder coat paint.

Fans

- Condenser fan will be direct-drive propeller type, forward swept blade, discharging air upward.
- Condenser fan motors will be totally enclosed, 1-phase type with class B insulation and permanently lubricated.
- Shafts will be corrosion resistant.
- Fan blades will be statically and dynamically balanced.
- Condenser fan openings will be equipped with coated steel wire safety guards.

Compressor

- Compressor will be hermetically sealed.
- Compressor will be mounted on rubber vibration isolators.
- Compressor will be covered with a sound absorbing blanket.

Condenser Coil

- Condenser coil will be air cooled.
- Coil will be constructed of aluminum fins mechanically bonded to copper tubes which are then cleaned, dehydrated, and sealed.

Refrigeration Components

- Refrigeration circuit components will include liquid-line front-seating shutoff valve with sweat connections, vapor-line front-seating shutoff valve with sweat connections, system charge of R-410A refrigerant, POE compressor oil, accumulator, charge compensator, electronic expansion valve, and reversing valve.
- Unit will be equipped with high-pressure switch, suction pressure transducer, and filter drier for R-410A refrigerant.

- Unit will be constructed in accordance with UL standards and will carry the UL label of approval. Unit will have C-UL approval.
- Unit cabinet will be capable of withstanding Federal Test Method Standard No. 141 (Method 6061) 500-hr salt spray test.
- Air-cooled condenser coils are pressure tested and the outdoor units are leak tested.
- Unit constructed in ISO9001 approved facility.

Delivery, Storage, and Handling

- Unit will be shipped as single package only and is stored and handled per unit manufacturer's recommendations.

Warranty (for inclusion by specifying engineer)

- U.S. and Canada only.

**AIR-COOLED, SPLIT-SYSTEM AIR CONDITIONER
TVA9**

Operating Characteristics

- The capacity of the unit will meet or exceed _____ Btuh at a suction temperature of _____ °F (°C). The power consumption at full load will not exceed _____ kW.
- Combination of the unit and the evaporator or fan coil unit will have a total net cooling capacity of _____ Btuh or greater at conditions of _____ CFM entering air temperature at the evaporator at _____ °F (°C) wet bulb and _____ °F (°C) dry bulb, and air entering the unit at _____ °F (°C).
- The system will have a SEER of _____ Btuh/watt or greater at DOE conditions.

Electrical Requirements

- Nominal unit electrical characteristics will be _____ v, single phase, 60 hz. The unit will be capable of satisfactory operation within voltage limits of _____ v to _____ v.
- Unit electrical power will be single point connection.
- Control circuit will be 24v.
- Compliant with IEC 61000-4-5 Transient Surge Requirement.

Special Features

- Refer to section of this literature identifying accessories and descriptions for specific features and available enhancements.
- Observer® control with appropriate software version is required for full featured operation.

SYSTEM DESIGN SUMMARY

1. Intended for outdoor installation with free air inlet and outlet. Outdoor fan external static pressure available is less than 0.01-in. wc.
2. This product is not qualified for low ambient cooling operation.
Minimum cooling outdoor operating temperatures:
 - Communicating systems: 40°F (4.44°C)
 - Non-communicating systems: 55°F (12.8°C)
3. For reliable operation, unit should be level in all horizontal planes.
4. This unit is qualified for up to 100 ft (30.5 m) equivalent length of line set without additional accessories.
5. If any refrigerant tubing is buried, provide a 6 in. (152.4 mm) vertical rise to the valve connections at the unit. Refrigerant tubing lengths up to 36 in. (914.4 mm) may be buried without further consideration. Do not bury refrigerant lines longer than 36 in. (914.4 mm).
6. Use only copper wire for electric connection at unit. Aluminum and clad aluminum are not acceptable for the type of connector provided.
7. Do not apply capillary tube indoor coils to these units.
8. R-410A refrigerant TXV required on indoor coil.

Accessory Description and Usage

Support Feet

Raises unit above base pad. 2 and 3 ton kit contains 5 feet for stable installation with small base. 4 and 5 ton kit contains 4 feet.

Usage Guideline:

Recommended in cold climates where snow can accumulate around unit. Allows improved base pan drainage. Recommended for rooftop applications.

Thermostatic Expansion Valve (TXV)

A modulating flow-control valve which meters refrigerant liquid flow rate into the evaporator in response to the superheat of the refrigerant gas leaving the evaporator.

Usage Guideline:

Required if indoor unit does not already contain R-410A refrigerant TXV

WALL CONTROL

TSTAT0201CW	Observer® Self Configuring Communicating Wall Control	ALL
-------------	---	-----

ACCESSORY USAGE GUIDELINES

KIT NUMBER	KIT NAME	Unit Size (Voltage/Series)						
		24	25	36	37	48	49	60
NASA00106SS	Snow Stand Kit							X
NASA001SF	Support Feet, 4" (102mm) tall				X	X	X	X
NASA00201SF		X	X	X				
NAEA40501TX	TXV Kit, R-410A for use with copper or tin piston fan coils	X	X					
NAEA40601TX				X	X			
NAEA40701TX						X	X	X
NAEB40501TX	TXV Kit, R-410A for use with aluminum piston fan coils		X					
NAEB40601TX				X	X			
NAEB40701TX						X	X	
1187979	Vapor Line Muffler	X	X	X	X	X	X	X



Use of the AHRI Certified TM Mark indicates a manufacturer's participation in the program. For verification of certification for individual products, go to www.ahridirectory.org.



ISO 9001
QMS-SAI Global

